

FILAMENT LED

40 Watt

REPLACEMENT

USES ONLY 2.0W



**TRUE
COLORS**

-  NATURAL DIMMING – DIM TO OFF¹
-  SUITABLE FOR WET LOCATIONS
-  ENCLOSED RATED
-  25,000 HOURS RATED LIFE
-  3-YEAR LIMITED WARRANTY
-  360° LIGHT DISTRIBUTION
-  90+ CRI | JA8 COMPLIANT²
-  UL LISTED

ALSO AVAILABLE IN:



Standard
Tubular T6



Standard
Tubular T10



Flex@RCH
Spiral Vertical



Ordering Information (Tubular, 40W)

Model Number	Type	Base	Lumens	Wattage	MOL MOD	CCT	CRI
LTTB6V20022CB	Glass Amber	E12 Candelabra	160LM	2.0W	3.8" 0.8"	2200K	83
LTTB6C20027CB	Glass Clear	E12 Candelabra	200LM	2.0W	3.8" 0.8"	2700K	83
LTTB6V20022CB-90	Glass Amber	E12 Candelabra	160LM	2.0W	3.8" 0.8"	2200K	92+
LTTB6C20027CB-90	Glass Clear	E12 Candelabra	200LM	2.0W	3.8" 0.8"	2700K	92+
LTTB9V20022MB	Glass Amber	E26 Medium	160LM	2.0W	5.1" 1.2"	2200K	83
LTTB9C20027MB	Glass Clear	E26 Medium	200LM	2.0W	5.1" 1.2"	2700K	83
LTTB9X20022MB-SV	Glass Amber	E26 Medium	220LM	3.5W	5.1" 1.2"	2200K	92+
LTTB10V20022MB	Glass Amber	E26 Medium	160LM	2.0W	7.5" 1.2"	2200K	83
LTTB10C20027MB	Glass Clear	E26 Medium	200LM	2.0W	7.5" 1.2"	2700K	83

NOTE 1: Please reference dimmer compatibility list at www.archipelagolighting.com

NOTE 2: T.24 JA8 compliant products are designated with "-90" suffix for 90+CRI.

NOTE 3: Alternative CCTs are available as special order. Please contact sales@archipelagolighting.com for more information.

NOTE 4: Wattage Equivalency is based on Vintage Carbon Filament Incandescent bulbs with lower lumen output than standard tungsten filament bulbs.



Vintage®RCH

Flex®RCH




Vintage®RCH


Standard Filament




Looped-Thread (-LT)



Spiral Vertical (-SV)

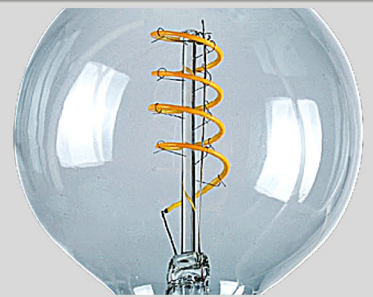

-SV & Smoked Lens (M)



Squirrel Cage (-SC)



Spiral Horizontal (-SH)

Flex®RCH

Artisan Spiral LED Filament

