



D2D2 Dusk To Dawn

HIGHLIGHTS

- Instant-on with no warm-up, unlike HID
- PowerSET feature allows for multiple light levels out of the box
- FieldCCeT feature provides multiple color temperature settings in one fixture (PS60 & PS120)
- PS30 has integrated photocell while PS60 & PS120 have NEMA approved photocell included
- UV stabilized powder coat gray finish for extra corrosion protection
- Suitable for wall or pole mount applications

CERTIFICATIONS

- UL listed for US & Canada
- RoHS Compliant
- FCC Compliant
- IP65 Rated
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

PERFORMANCE

- High Efficacy, up to 137 lm/W
- PS30 available in fixed 5000K CCT
- PS60 & PS120 available in field-selectable CCT (3000/4000/5000K)
- CRI: >80
- Estimated Lifetime L70: >50,000 hours

ELECTRICAL

- Input voltage: 120-277V
- 0-10V dimming, dim-to-off
- Surge Protection: 4KV
- Power Factor: >0.9
- THD: <25%

THERMAL

- -40°F to 104°F (-40°C to 40°C) ambient operating temperature


CONSTRUCTION

- Diecast aluminum housing
- Impact resistant, non-yellowing polycarbonate lens
- Powder coat gray finish

WARRANTY

- 5-Year limited warranty available [online](#). Contact your EiKO sales rep for additional details.

project name	type
catalog number	voltage
approved by	date

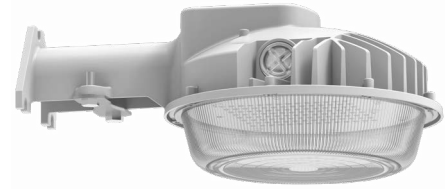

D2D2-PS30-850-UDIM



D2D2-PS60-8FCCT-UDIM



D2D2-PS120-8FCCT-UDIM



APPLICATIONS

- Shipping/Receiving
- Warehouses
- Exterior Perimeter
- Parking Garage
- Parking Lot
- Pathway

AVAILABLE MODELS

ORDER	ORDER CODE	ITEM #	WATTS	CCT	LUMENS*	EFFICACY (lm/W)	CRI	DIMMING	VOLTAGE	DLC ID #
	15762	D2D2-PS30-850-UDIM	30/20/10	5000	4,115	137	≥80	0-10V	120-277V	PREMIUM
	15763	D2D2-PS60-8FCCT-UDIM	60/40/20	3000/4000/5000	7,885	131				Pending
	15764	D2D2-PS120-8FCCT-UDIM	120/100/80	3000/4000/5000	14,400	120				Pending

*Nominal lumens at highest wattage and 5000K


MODEL CONFIGURATOR						
MODEL	-	WATTS	-	CCT	-	VOLTAGE & DIMMING
D2D2	-		-		-	UDIM
D2D2	-	PS30 - 30/20/10W PS60 - 60/40/20W PS120 - 120/100/80W	-	850 - 5000K (PS30 Only) 8FCCT - Field-Selectable CCT (3000/4000/5000K)	-	UDIM - Universal Voltage (120-277V), Dimming (0-10V)

ACCESSORIES


ORDER	ORDER CODE	ITEM #	DESCRIPTION
	15765	D2D2-ARM	Arm mount for D2D2 fixtures

PRODUCT DIMENSIONS


D2D2-PS30-850-UDIM

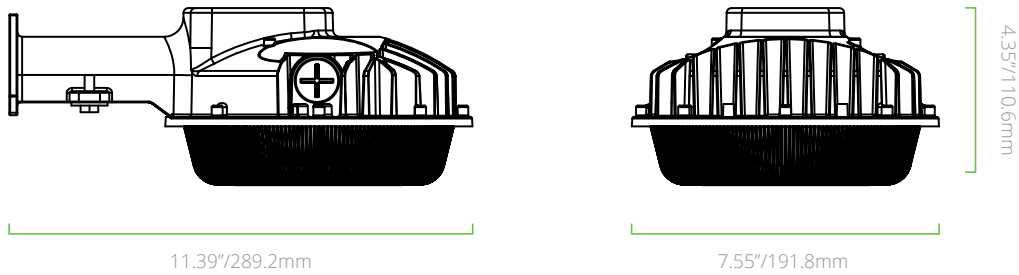

D2D2-PS60-8FCCT-UDIM

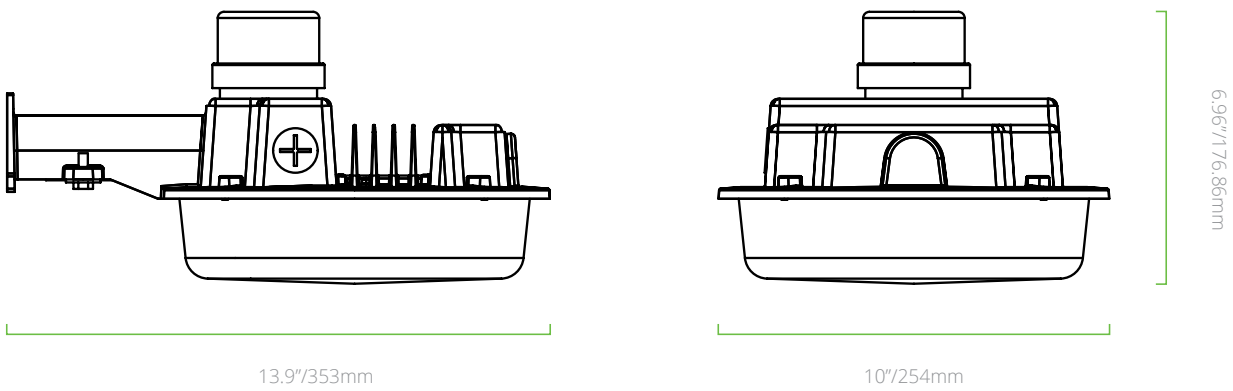

D2D2-PS120-8FCCT-UDIM

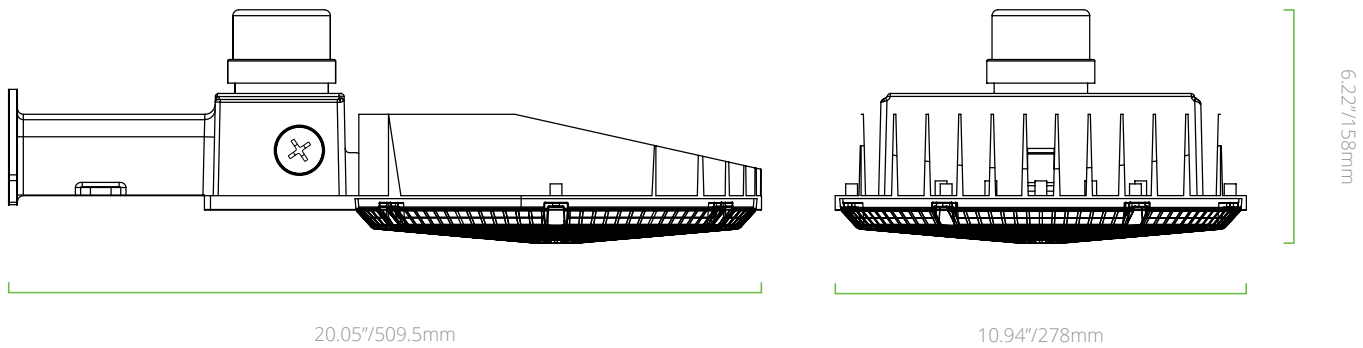

ARM DIMENSIONS

