

Maintenance/Lamp Replacement

Contact qualified electrician for the maintenance service. Order any replacement parts individually with the exact same model number. For any questions or concerns contact the manufacturer.

Product Information

Bulb Shape	Base	Watts	PC	Description	Case Qty	MOL (in)	Initial Lumens	Color Temp (K)	CRI	Rated Life (L70)	UL	Location Rating
T8	Medium Bi-Pin (G13)	18	94381	LED21T8/4/835	10	48	2,650	3500	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	94382	LED21T8/4/840	10	48	2,750	4000	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	94383	LED21T8/4/850	10	48	2,850	5000	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	26059	LED21T8/4/865	10	48	2,750	6500	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	62428	LED21T8/G/4/835	10	48	2,600	3500	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	62485	LED21T8/G/4/840	10	48	2,700	4000	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	62487	LED21T8/G/4/850	10	48	2,800	5000	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18		LED21T8/G/4/865	10	48	2,700	6500	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	62406	LED21T8/G4/835HL	10	48	2,750	3500	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	62407	LED21T8/G4/840HL	10	48	2,800	4000	80	50,000	Yes	Damp
T8	Medium Bi-Pin (G13)	18	62408	LED21T8/G4/850HL	10	48	2,800	5000	80	50,000	Yes	Damp

Driver	Watts	PC	Description	Input Voltage	Output Voltage	Dimming	Power Factor	Case Qty.	Rated Life (hrs)	UL
1 LED LAMP DRIVER (Dimmable)	42	94384	LED21T8/DR/1L	120-277V	(26-34) x1	0-10V	>=0.9	10	50,000	Yes
2 LED LAMP DRIVER (Dimmable)	42	94385	LED21T8/DR/2L	120-277V	(26-34) x2	0-10V	>=0.9	10	50,000	Yes
2 LED LAMP DRIVER (Dimmable)	42	94385	LED21T8/DR/2L	120-277V	(26-34) x2	0-10V	>=0.9	10	50,000	Yes
4 LED LAMP DRIVER (Dimmable)	84	62030	LED21T8/DR/D4L	120-277V	(26-34) x4	0-10V	>=0.9	10	50,000	Yes
2 LED LAMP DRIVER (Dimmable)	42	34016	LED21T8/DR/VLC2L	120-277V	(26-34) x2	0-10V	>=0.9	10	50,000	Yes

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class [A] RFLD complies with the Canadian standard ICES-003. Ce DEFR de la classe [A] est conforme à la NMB-003 du Canada.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.




GE Lighting • www.gelighting.com


Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions. The GE brand and logo are registered trademarks of the General Electric Company © 2015.

13579-092914

RES#1546904
INSI EDT2118CINSTRALCLUBES 00

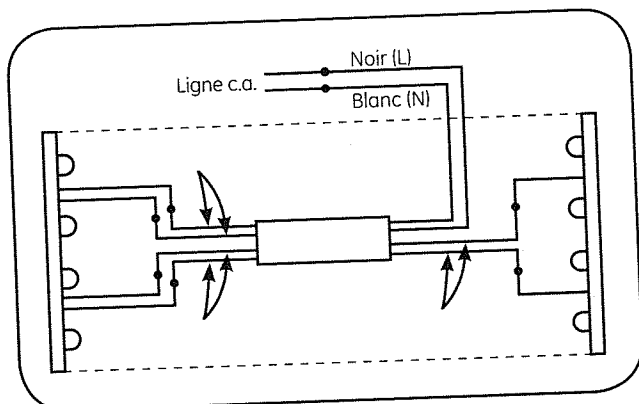


- 4C Quatre Tube Fixture :** Connecter le noir (L) et blanc (N) fils du conducteur de fils noir et blanc de la ligne AC , respectivement. Connectez le fil bleu du conducteur à un ensemble de douilles à une extrémité . Dans le même but de connecter les fils rouges à autre jeu de douilles . A l'extrémité opposée , brancher les fils jaunes à lampolders.

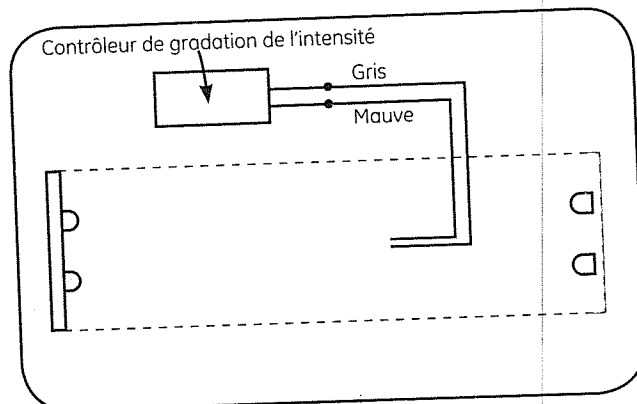


- 5 Option de gradateur :** Connectez les fils gris et mauve du pilote au contrôleur de gradation de l'intensité.


REMARQUE : Autres fils non montrés, pour plus de clarté.

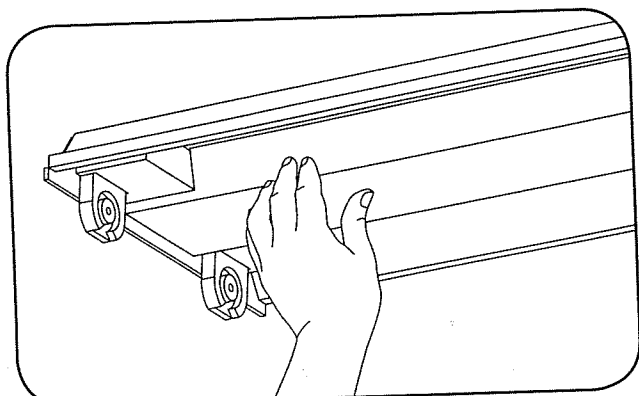

- 6A** Compactez les fils, et remettez en place la plaque de finition de l'appareil.

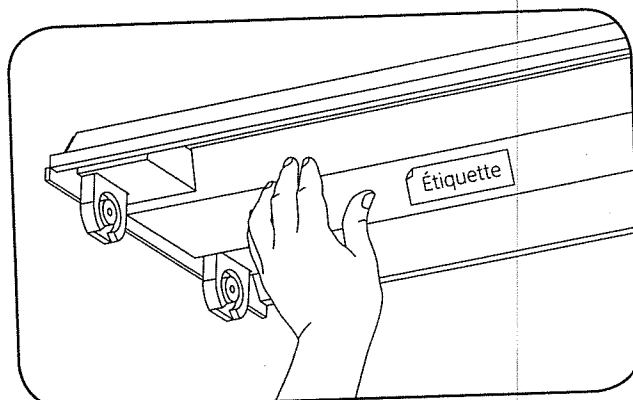

- 6B** Apposez l'étiquette sur l'appareil, à un endroit où elle sera facilement visible.

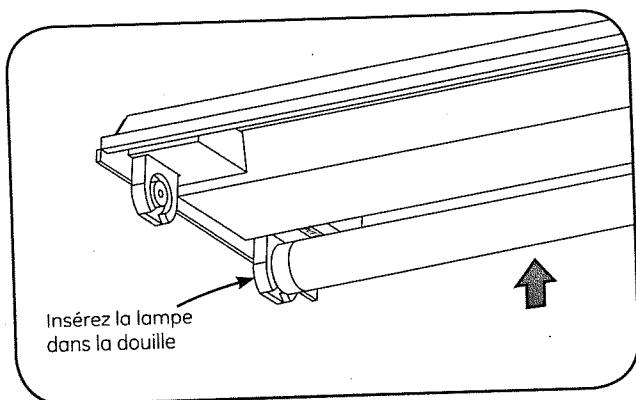

- 7** Insérez le tube à DEL Energy SmartMD dans la douille de l'appareil, et faites-le pivoter sur 90 degrés. Répétez la procédure pour les autres tubes.

- 8** Remettez l'alimentation en circuit, et assurez-vous que les lampes fonctionnent correctement.