

## Maintenance/Lamp Replacement

Contact qualified electrician for the maintenance service. Order any replacement parts individually with the exact same model number. For any questions or concerns contact the manufacturer.

### Product Information

| Bulb Shape | Base                | Watts | PC    | Description     | Case Qty | MOL (in) | Initial Lumens | Color Temp (K) | CRI | Rated Life (L70) | UL  | Location Rating |
|------------|---------------------|-------|-------|-----------------|----------|----------|----------------|----------------|-----|------------------|-----|-----------------|
| T8         | Medium Bi-Pin (G13) | 10    | 76194 | LED12T8/G/4/830 | 10       | 48       | 1,550          | 3000           | 80  | 50,000           | Yes | Damp            |
| T8         | Medium Bi-Pin (G13) | 10    | 76264 | LED12T8/G/4/835 | 10       | 48       | 1,600          | 3500           | 80  | 50,000           | Yes | Damp            |
| T8         | Medium Bi-Pin (G13) | 10    | 76265 | LED12T8/G/4/840 | 10       | 48       | 1,650          | 4000           | 80  | 50,000           | Yes | Damp            |
| T8         | Medium Bi-Pin (G13) | 10    | 76271 | LED12T8/G/4/850 | 10       | 48       | 1,650          | 5000           | 80  | 50,000           | Yes | Damp            |
| T8         | Medium Bi-Pin (G13) | 10    | 76278 | LED12T8/G/4/865 | 10       | 48       | 1,650          | 6500           | 80  | 50,000           | Yes | Damp            |

| Driver                       | Watts | PC    | Description    | Input Voltage | Output Voltage | Dimming | Power Factor | Case Qty. | Rated Life (hrs) | UL  |
|------------------------------|-------|-------|----------------|---------------|----------------|---------|--------------|-----------|------------------|-----|
| 2 LED LAMP DRIVER            | 24    | 76289 | LED12T8/DR/2L  | 120-277V      | (26-34) x2     | No      | >=0.9        | 10        | 50,000           | Yes |
| 2 LED LAMP DRIVER (Dimmable) | 24    | 76290 | LED12T8/DR/D2L | 120-277V      | (26-34) x2     | 0-10V   | >=0.9        | 10        | 50,000           | Yes |
| 4 LED LAMP DRIVER (Dimmable) | 48    | 76318 | LED12T8/DR/D4L | 120-277V      | (26-34) x4     | 0-10V   | >=0.9        | 10        | 50,000           | Yes |

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class [A] RFLD complies with the Canadian standard ICES-003. Ce DEFR de la classe [A] est conforme à la NMB-003 du Canada.

**Note:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.




GE Lighting • [www.gelighting.com](http://www.gelighting.com)


Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions. The GE brand and logo are registered trademarks of the General Electric Company © 2016.

13579-092914


RES#1522459  
INSLEDT8110GEINSTALGUIDEC-00

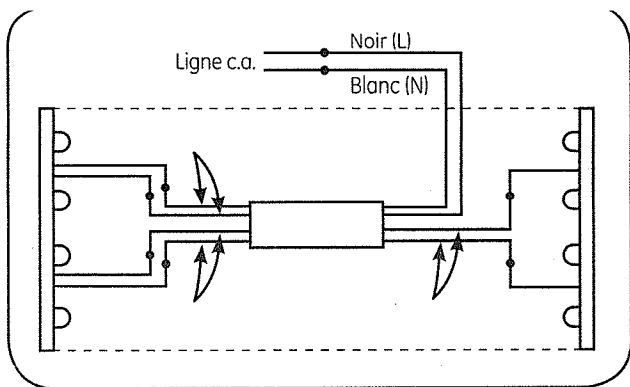


- 4C Quatre Tube Fixture :** Connecter le noir ( L ) et blanc ( N ) fils du conducteur de fils noir et blanc de la ligne AC , respectivement. Connectez le fil bleu du conducteur à un ensemble de douilles à une extrémité . Dans le même but de connecter les fils rouges à autre jeu de douilles . A l'extrémité opposée , brancher les fils jaunes à lampolders.

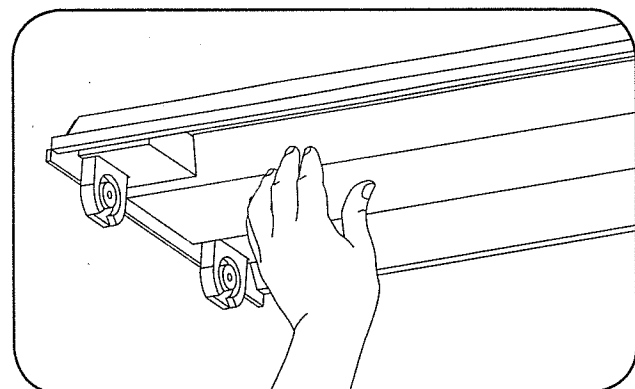

- 6A** Compactez les fils, et remettez en place la plaque de finition de l'appareil.

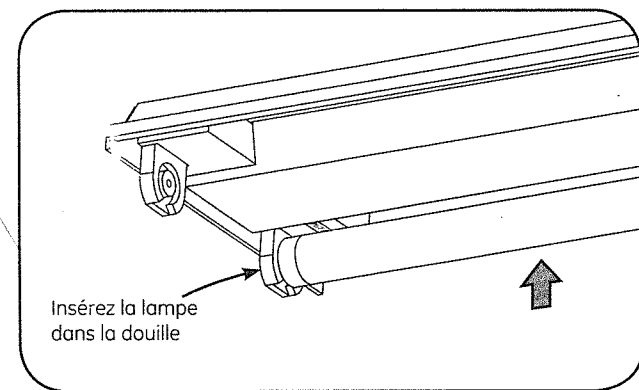


- 7** Insérez le tube à DEL Energy SmartMD dans la douille de l'appareil, et faites-le pivoter sur 90 degrés. Répétez la procédure pour les autres tubes.

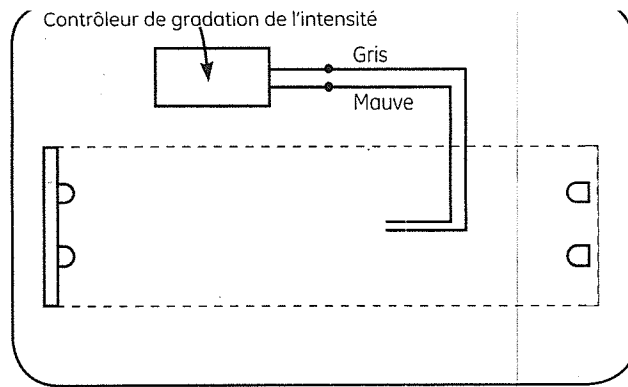

- 5 Option de gradateur :** Connectez les fils gris et mauve du pilote au contrôleur de gradation de l'intensité.

**REMARQUE :** Autres fils non montrés, pour plus de clarté.

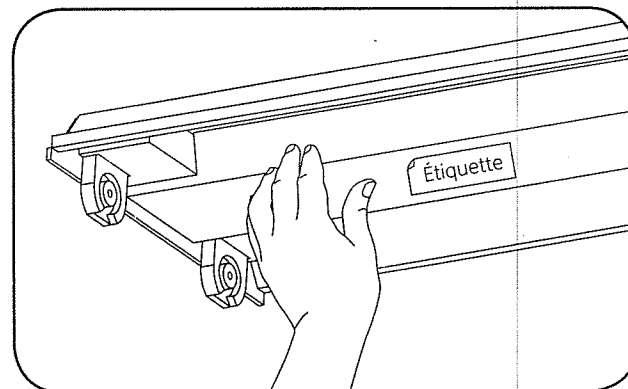

- 6B** Apposez l'étiquette sur l'appareil, à un endroit où elle sera facilement visible.

- 8** Remettez l'alimentation en circuit, et assurez-vous que les lampes fonctionnent correctement.