


CEILING FIXTURE Mount as a ceiling flush mount or wall sconce




15 inch LED FLAT PANEL **CEILING FIXTURE**


Mount as a ceiling flush mount or wall sconce

- Instant Full Brightness
- (including in sub-zero temperatures)
- No lamps to dispose or replace
- 50,000 hour rated life (Over 45 Years)*
- Even Light Distribution
- 1550 Lumens Uses Only 22W
- Warm White 3000 K
- Nickel Tone Trim Frosted Plastic Lens

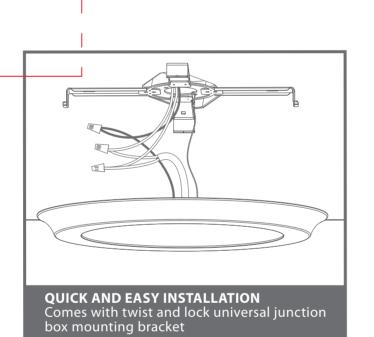

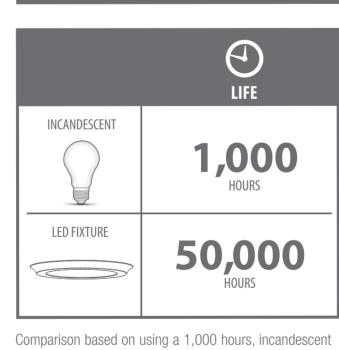

light bulb and this 50,000 hours LED fixture.

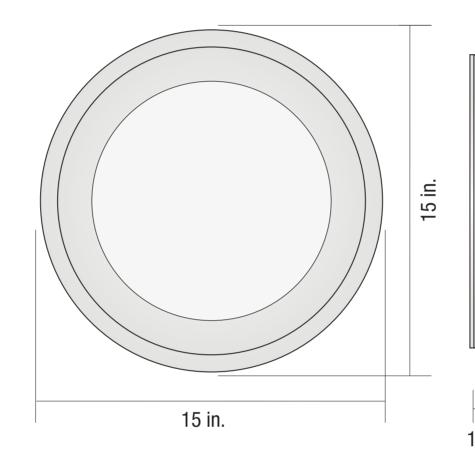

LIMITED WARRANTY This product is warranted to be free from defects in workmanship and materials for up to 5 years from date of purchase. If it fails to do so, please contact Feit Electric at info@feit.com or call 1-866 326-BULB (2852) for instructions on replacement.

WARNING: Risk of fire. Use only on 120 volt 60Hz circuits. Suitable for damp locations. Before installing your lighting fixture, thoroughly review enclosed installation manual. If you do not have sufficient electrical wiring experience, please refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician. All electrical connections must be in accordance with Local and National Electrical Code (NEC) Standards. Reliable operating temperature is 0°F -120°F. If flickering occurs in low level dimming, increase light level. Compatible with most dimmers including Leviton 6681-IW, Lutron S-600P and Lutron DVCL-153. Dimmable to 10% with most dimmers. For more information including dimmer compatibility visit www.feit.com or call our toll free number 1-866-326-BULB.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. The performance specifications (lumens, watts, life and CCT) printed on this LED product package should only be considered an approximation of expected performance.

* Based on normal household use of 3 hours per day, this fixture lasts up to 45 years. Lasts 50 times longer than 1000 hour incandescent bulbs.







© m m

LIGHTING EVOLVED

CEILING FIXTURE

Mount as a ceiling flush mount or wall sconce

- Instant Full Brightness (including in sub-zero temperatures) Even Light Distribution
- Nickel Tone Trim Frosted Plastic Lens

















Mount as a ceiling flush mount or wall sconce CEILING FIXTURE 15 INCH LED FLAT PANEL



YEARS
OF VIVID LED LIGHT