

# Low Profile LED Canopy Installation Instructions



**Models:** CMS1/CL33BZ50/LED (99913)  
CMS2/CL58BZ50/LED (99914)

## IMPORTANT

READ INSTRUCTIONS CAREFULLY BEFORE INSTALLING.  
KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.


**WARNING** - Risk of fire or electric shock.

**WARNING** - Make certain power is switched OFF before starting installation or attempting any maintenance. Consult an electrician if not qualified, to prevent electric shock.

**WARNING** - This luminaire is not intended to use for emergency lighting.

## Application/ Use:


This product is UL listed for use in wet locations. It is not intended for use with dimmers.

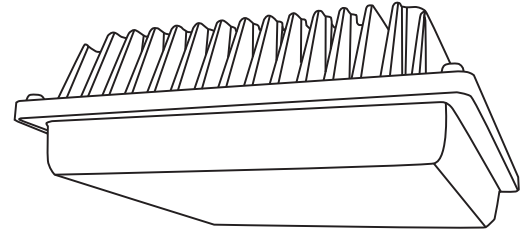

## Installation steps:

1. Remove the junction box mounting plate from the top of the fixture by loosening one side screw and sliding the fixture plate out from the holding brackets on the top of the casting.
2. Install the mounting plate to the junction box with two screws (not provided). The bracket should be positioned to allow the fixture to be "square" with the sides of the canopy the fixture is mounted to.
3. Hang the fixture from support spring while wiring the unit. Bring the fixture input wires from the top of the fixture and connect to the power leads in the junction box – black to black (hot), white to white (neutral), and green to green (ground).
4. Connect the main housing to the junction box bracket. Hold in place while reinstalling one side locking screw.
5. Turn on the power. The fixture will come to full output in several seconds.

**NOTE:** Do not remove the bottom lens or touch the LED optics. All LEDs are preinstalled and ready to operate.

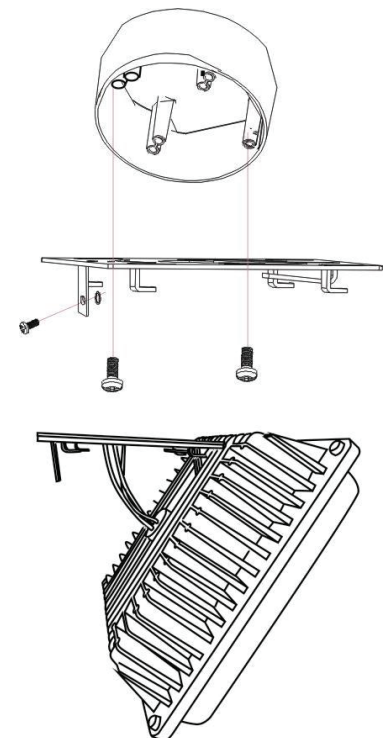

**IMPORTANT SAFETY INFORMATION:**

**CAUTION:** This luminaire must be wired in accordance with the National Electric Code and applicable local codes and ordinances. Proper grounding is required for safety.

**CAUTION:** Installation and servicing of this luminaire should be performed by qualified personnel only.

**CAUTION:** Do not use this product for other than intended use. To prevent early product failure, luminaire should only be used in operating environments ranging from -40°C (-40°F) to 40°C (104°F).

**Cleaning and Maintenance:**

**Caution:** Do not clean or maintain while the luminaire is energized. Check that the luminaire temperature is cool enough to touch. Periodically check and remove any accumulated dirt or debris from the lens and around luminaire.

- 1) Clean lens with non-abrasive glass cleaning solution.
- 2) Do not open the luminaire to clean the LEDs. Do not touch the LEDs.

**Replacement Parts:**

Contact your sales representative for replacement part availability or contact Halco Customer Care at 800.677.3334.

**Warranty Information:**

This product is warranted for 5 years from the date of purchase.

If this product does not perform to the specifications supplied on this package, send an email or write to the address below for product return and replacement. This replacement is the sole remedy available.

Liability for incidental or consequential damage is expressly excluded.

Visit [www.halcolighting.com](http://www.halcolighting.com) for full warranty details and compatibility information.

