



SPECIFICATION SHEET : **SHGS3-MID-6-100-L**

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications

This Ballast Will Operate The Following Lamps.




**6 OR 5 X F59T12HO, F71T12HO, F72T12HO,
F73T12HO**

ELECTRICAL DATA (208V APPLICATION)

INPUT VOLT: 208V \pm 10%, 50/60Hz ,


LAMP WATTS/TYPE	F59T12HO	F71T12HO	F72T12HO	F73T12HO	-	-	-	-
LAMP RATED POWER	80W	100W	85W	100W				
LAMPS OPERATED	5							
INPUT POWER: Watts	358	416	409	428				
LINE CURRENT: Amps	1.74	2.02	1.99	2.08				
POWER FACTOR	0.98	0.99	0.99	0.99				
BALLAST FACTOR	0.9	0.8	0.9	0.8				
EFFICACY FACTOR	0.2	0.2	0.2	0.2				
OPERATING FREQUENCY	54KHz							
THD	< 10%							
CURRENT CRESS FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41							
INHERENT THERMAL PROT.	YES							
MIN. OPERATING TEMP	0 $^{\circ}$ C (32 $^{\circ}$ F)							
MAX. CASE TEMP	75 $^{\circ}$ C (167 $^{\circ}$ F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

MECHANICAL DATA

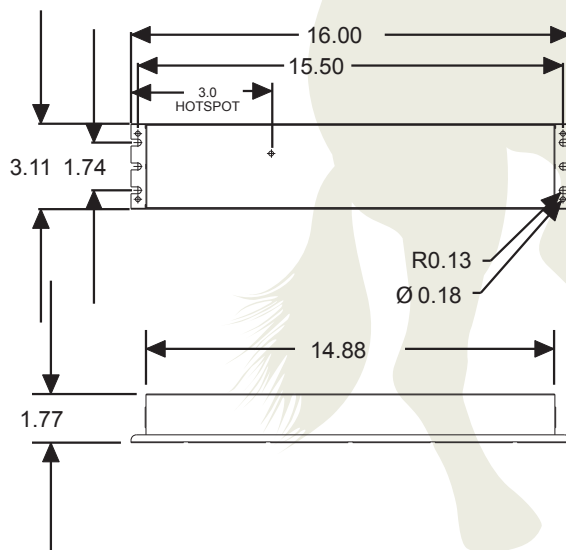

WIRING DIAGRAMS

WIRE	BLK	WHT	YEL/BLK	RED/WHT	BLU/WHT	YEL	RED	BLUE
LENGTH-INCHES	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"

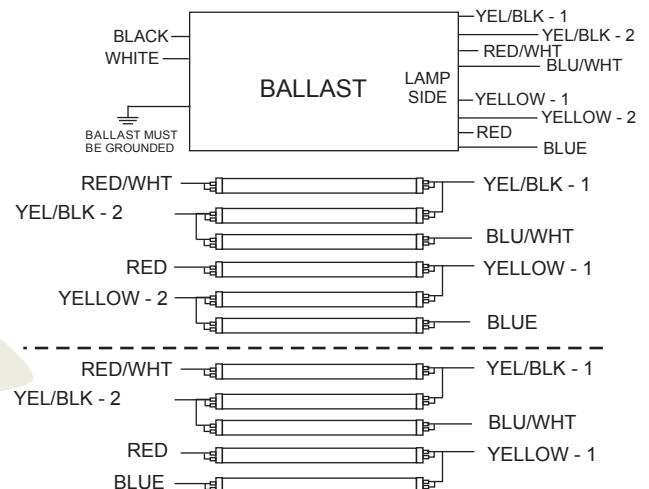

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2011-270-1 rev



SPECIFICATION SHEET : **SHGS3-MID-6-100-L**

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications

This Ballast Will Operate The Following Lamps.




6 OR 5 X F59T12HO, F71T12HO, F72T12HO,
F73T12HO


ELECTRICAL DATA (208V APPLICATION)

INPUT VOLT: 208V ± 10%, 50/60Hz								
LAMP WATTS/TYPE	F59T12HO	F71T12HO	F72T12HO	F73T12HO	-	-	-	-
LAMP RATED POWER	80W	100W	85W	100W				
LAMPS OPERATED	6							
INPUT POWER: Watts	433	496	492	499				
LINE CURRENT: Amps	2.10	2.40	2.38	2.42				
POWER FACTOR	0.99	0.99	0.99	0.99				
BALLAST FACTOR	0.9	0.8	0.9	0.8				
EFFICACY FACTOR	0.2	0.2	0.2	0.2				
OPERATING FREQUENCY	54KHz							
THD	< 10%							
CURRENT CRESS FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41							
INHERENT THERMAL PROT.	YES							
MIN. OPERATING TEMP	0 °C (32 °F)							
MAX. CASE TEMP	75 °C (167 °F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

MECHANICAL DATA

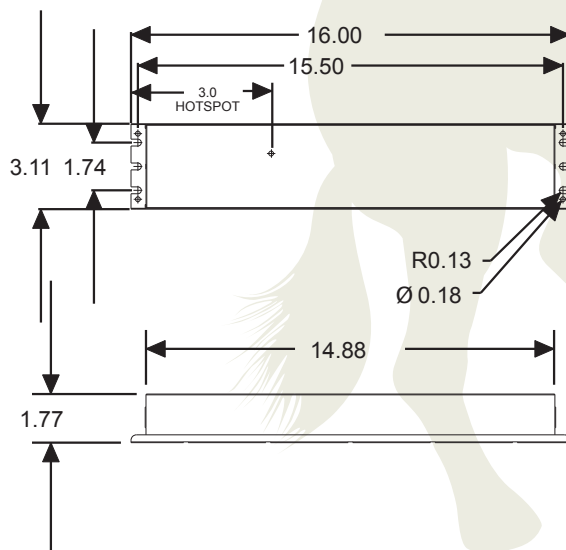

WIRING DIAGRAMS

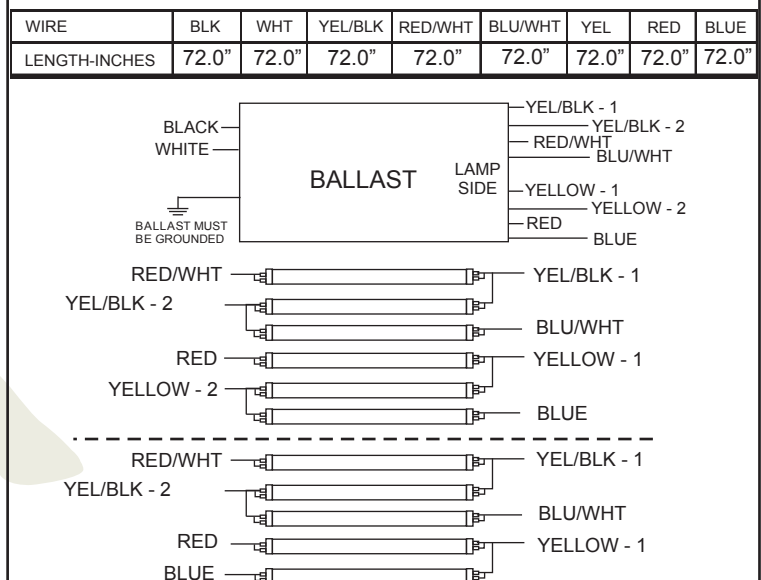

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2011-270-2 rev



SPECIFICATION SHEET : **SHGS3-MID-6-100-L**

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications

This Ballast Will Operate The Following Lamps.




6 OR 5 X F59T12HO, F71T12HO, F72T12HO,
F73T12HO

ELECTRICAL DATA (220V APPLICATION)

INPUT VOLT: 220V \pm 10%, 50/60Hz ,


LAMP WATTS/TYPE	F59T12HO	F71T12HO	F72T12HO	F73T12HO				
LAMP RATED POWER	80W	100W	85W	100W				
LAMPS OPERATED	5							
INPUT POWER: Watts	357	416	408	427				
LINE CURRENT: Amps	1.65	1.92	1.88	1.97				
POWER FACTOR	0.98	0.99	0.99	0.99				
BALLAST FACTOR	0.9	0.8	0.9	0.8				
EFFICACY FACTOR	0.2	0.2	0.2	0.2				
OPERATING FREQUENCY	54KHz							
THD	< 10%							
CURRENT CRESS FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41							
INHERENT THERMAL PROT.	YES							
MIN. OPERATING TEMP	0 $^{\circ}$ C (32 $^{\circ}$ F)							
MAX. CASE TEMP	75 $^{\circ}$ C (167 $^{\circ}$ F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

MECHANICAL DATA

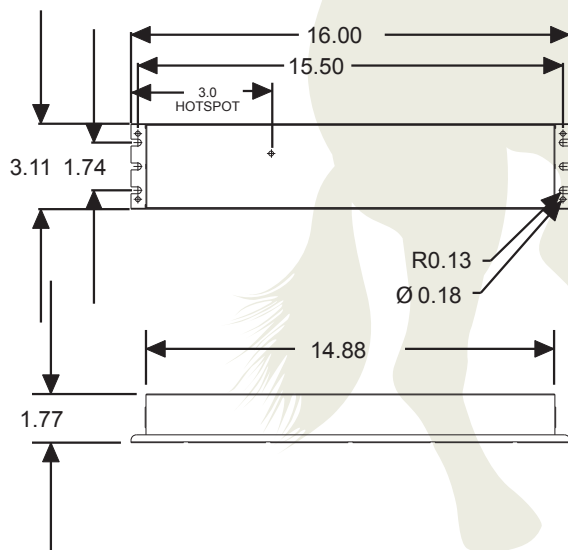

WIRING DIAGRAMS

WIRE	BLK	WHT	YEL/BLK	RED/WHT	BLU/WHT	YEL	RED	BLUE
LENGTH-INCHES	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"

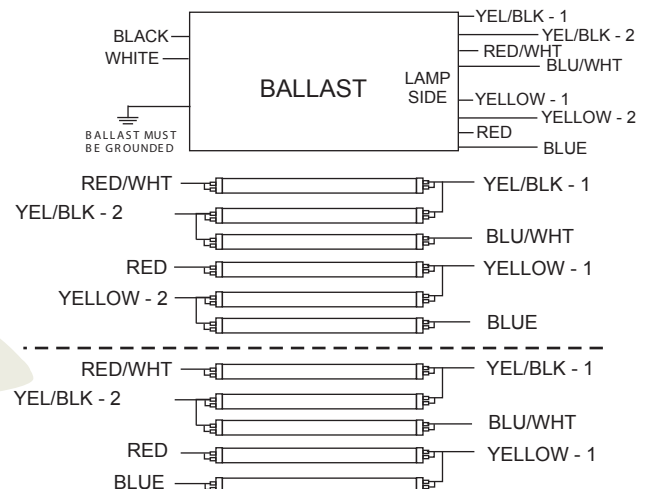

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2011-270-3 rev



SPECIFICATION SHEET : **SHGS3-MID-6-100-L**

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications

This Ballast Will Operate The Following Lamps.




6 OR 5 X F59T12HO, F71T12HO, F72T12HO,
F73T12HO

ELECTRICAL DATA (220V APPLICATION)


INPUT VOLT: 220V \pm 10%, 50/60Hz ,

LAMP WATTS/TYPE	F59T12HO	F71T12HO	F72T12HO	F73T12HO				
LAMP RATED POWER	80W	100W	85W	100W				
LAMPS OPERATED	6							
INPUT POWER: Watts	431	492	490	500				
LINE CURRENT: Amps	1.98	2.25	2.24	2.30				
POWER FACTOR	0.99	0.99	0.99	0.99				
BALLAST FACTOR	0.9	0.8	0.9	0.8				
EFFICACY FACTOR	0.2	0.2	0.2	0.2				
OPERATING FREQUENCY	54KHz							
THD	< 10%							
CURRENT CRESS FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41							
INHERENT THERMAL PROT.	YES							
MIN. OPERATING TEMP	0 $^{\circ}$ C (32 $^{\circ}$ F)							
MAX. CASE TEMP	75 $^{\circ}$ C (167 $^{\circ}$ F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

MECHANICAL DATA

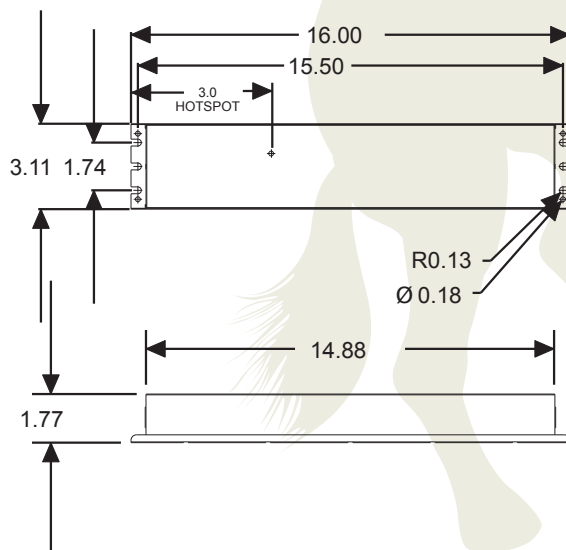

WIRING DIAGRAMS

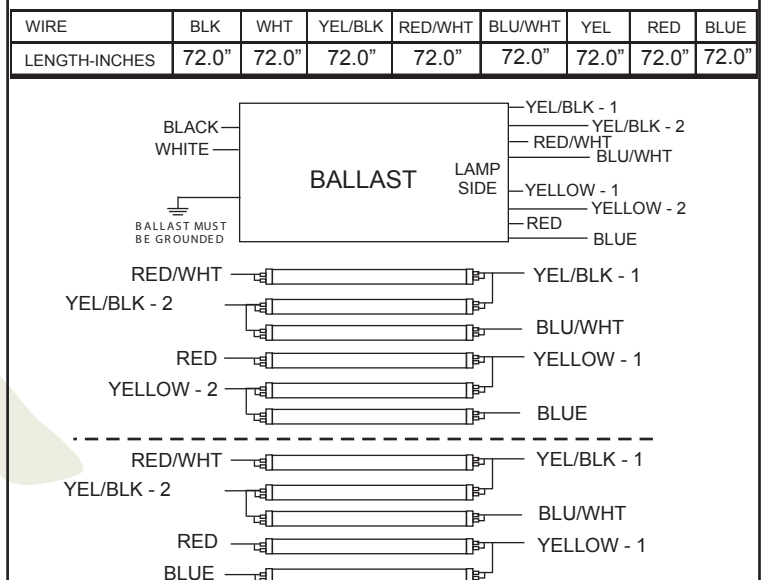

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2011-270-4 rev



SPECIFICATION SHEET : **SHGS3-MID-6-100-L**

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications

This Ballast Will Operate The Following Lamps.




6 OR 5 X F59T12HO, F71T12HO, F72T12HO,
F73T12HO

ELECTRICAL DATA (230V APPLICATION)

INPUT VOLT: 230V \pm 10%, 50/60Hz ,


LAMP WATTS/TYPE	F59T12HO	F71T12HO	F72T12HO	F73T12HO				
LAMP RATED POWER	80W	100W	85W	100W				
LAMPS OPERATED	5							
INPUT POWER: Watts	357	417	407	427				
LINE CURRENT: Amps	1.59	1.85	1.80	1.88				
POWER FACTOR	0.98	0.98	0.98	0.98				
BALLAST FACTOR	0.9	0.8	0.9	0.8				
EFFICACY FACTOR	0.2	0.2	0.2	0.2				
OPERATING FREQUENCY	54KHz							
THD	< 10%							
CURRENT CRESS FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41							
INHERENT THERMAL PROT.	YES							
MIN. OPERATING TEMP	0 $^{\circ}$ C (32 $^{\circ}$ F)							
MAX. CASE TEMP	75 $^{\circ}$ C (167 $^{\circ}$ F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

MECHANICAL DATA

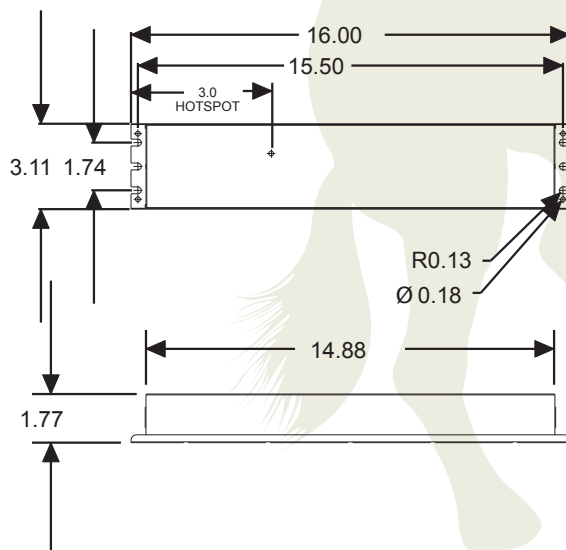

WIRING DIAGRAMS

WIRE	BLK	WHT	YEL/BLK	RED/WHT	BLU/WHT	YEL	RED	BLUE
LENGTH-INCHES	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"

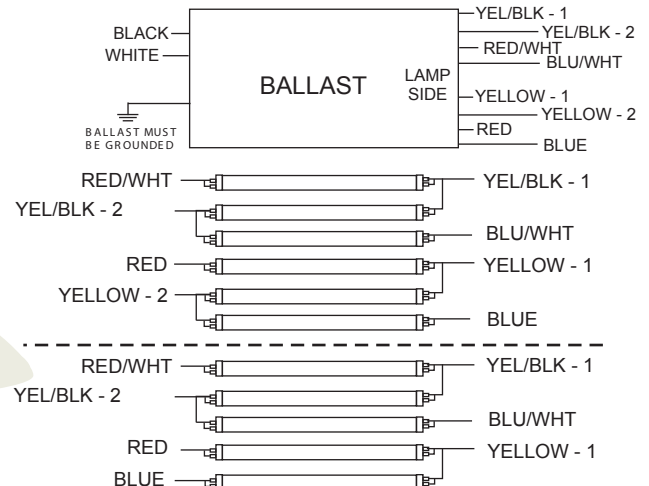

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2011-270-5 rev



SPECIFICATION SHEET : **SHGS3-MID-6-100-L**

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications

This Ballast Will Operate The Following Lamps.




6 OR 5 X F59T12HO, F71T12HO, F72T12HO,
F73T12HO

ELECTRICAL DATA (230V APPLICATION)

INPUT VOLT: 230V \pm 10%, 50/60Hz ,


LAMP WATTS/TYPE	F59T12HO	F71T12HO	F72T12HO	F73T12HO				
LAMP RATED POWER	80W	100W	85W	100W				
LAMPS OPERATED	6							
INPUT POWER: Watts	430	488	489	501				
LINE CURRENT: Amps	1.90	2.15	2.15	2.21				
POWER FACTOR	0.98	0.99	0.99	0.99				
BALLAST FACTOR	0.9	0.8	0.9	0.8				
EFFICACY FACTOR	0.2	0.2	0.2	0.2				
OPERATING FREQUENCY	54KHz							
THD	< 10%							
CURRENT CRESS FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41							
INHERENT THERMAL PROT.	YES							
MIN. OPERATING TEMP	0 ⁰ C (32 ⁰ F)							
MAX. CASE TEMP	75 ⁰ C (167 ⁰ F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

MECHANICAL DATA

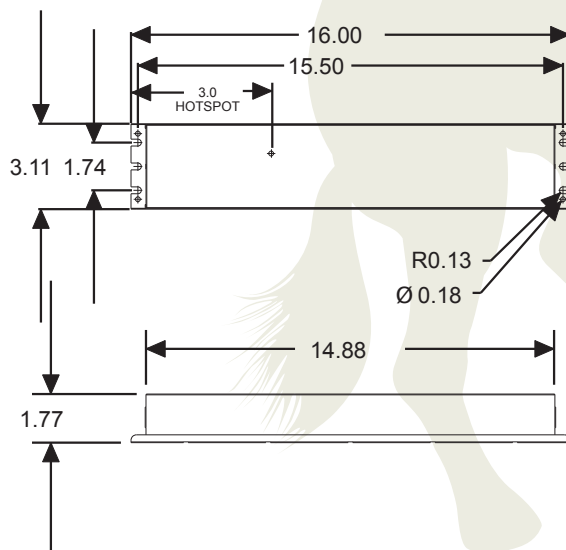

WIRING DIAGRAMS

WIRE	BLK	WHT	YEL/BLK	RED/WHT	BLU/WHT	YEL	RED	BLUE
LENGTH-INCHES	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"

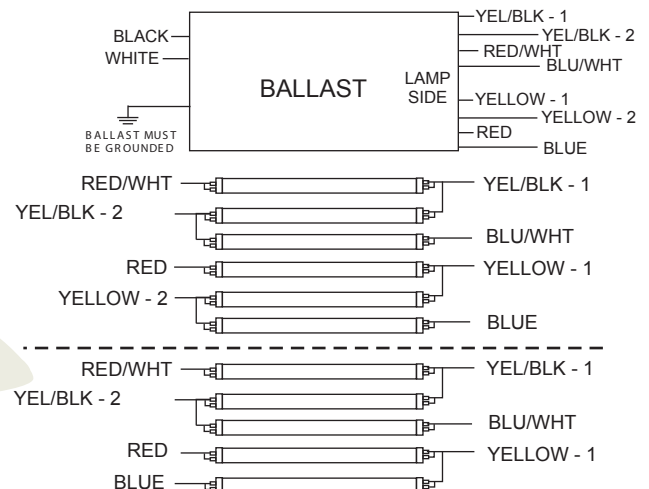

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2011-270-6 rev



SPECIFICATION SHEET : **SHGS3-MID-6-100-L**

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications

This Ballast Will Operate The Following Lamps.




6 OR 5 X F59T12HO, F71T12HO, F72T12HO,
F73T12HO

ELECTRICAL DATA (240V APPLICATION)

INPUT VOLT: 240V \pm 10%, 50/60Hz ,


LAMP WATTS/TYPE	F59T12HO	F71T12HO	F72T12HO	F73T12HO				
LAMP RATED POWER	80W	100W	85W	100W				
LAMPS OPERATED	5							
INPUT POWER: Watts	357	417	407	427				
LINE CURRENT: Amps	1.53	1.77	1.73	1.81				
POWER FACTOR	0.97	0.98	0.98	0.98				
BALLAST FACTOR	0.9	0.8	0.9	0.8				
EFFICACY FACTOR	0.2	0.2	0.2	0.2				
OPERATING FREQUENCY	54KHz							
THD	< 10%							
CURRENT CRESS FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41							
INHERENT THERMAL PROT.	YES							
MIN. OPERATING TEMP	0 $^{\circ}$ C (32 $^{\circ}$ F)							
MAX. CASE TEMP	75 $^{\circ}$ C (167 $^{\circ}$ F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

MECHANICAL DATA

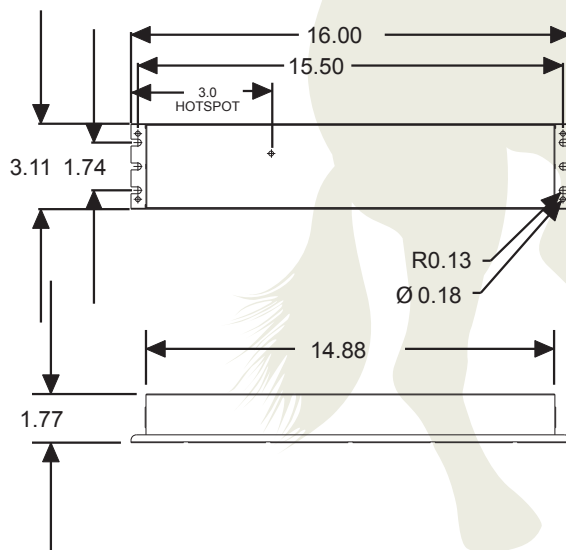

WIRING DIAGRAMS

WIRE	BLK	WHT	YEL/BLK	RED/WHT	BLU/WHT	YEL	RED	BLUE
LENGTH-INCHES	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"

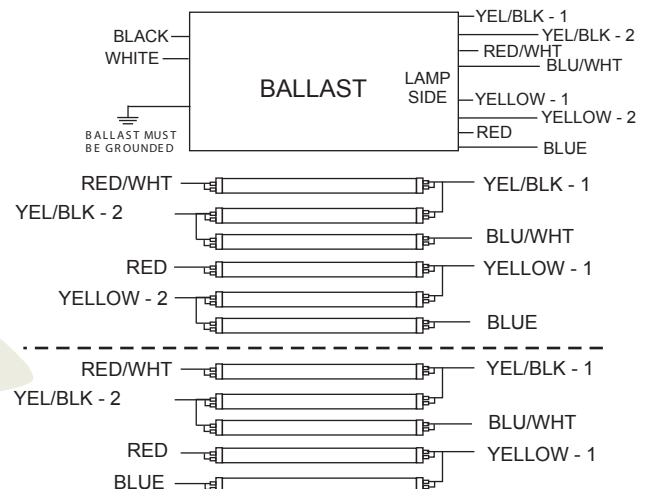

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2011-270-7 rev



SPECIFICATION SHEET : **SHGS3-MID-6-100-L**

This Is An Original Product From Fulham Co., Inc

Description : Sun Horse electronic ballast developed for use with UV & tanning lamp applications

This Ballast Will Operate The Following Lamps.




6 OR 5 X F59T12HO, F71T12HO, F72T12HO,
F73T12HO

ELECTRICAL DATA (240V APPLICATION)

INPUT VOLT: 240V \pm 10%, 50/60Hz ,


LAMP WATTS/TYPE	F59T12HO	F71T12HO	F72T12HO	F73T12HO				
LAMP RATED POWER	80W	100W	85W	100W				
LAMPS OPERATED	6							
INPUT POWER: Watts	429	486	488	501				
LINE CURRENT: Amps	1.82	2.05	2.06	2.12				
POWER FACTOR	0.98	0.98	0.99	0.99				
BALLAST FACTOR	0.9	0.8	0.9	0.8				
EFFICACY FACTOR	0.2	0.2	0.2	0.2				
OPERATING FREQUENCY	54KHz							
THD	< 10%							
CURRENT CRESS FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41							
INHERENT THERMAL PROT.	YES							
MIN. OPERATING TEMP	0 $^{\circ}$ C (32 $^{\circ}$ F)							
MAX. CASE TEMP	75 $^{\circ}$ C (167 $^{\circ}$ F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR							

MECHANICAL DATA

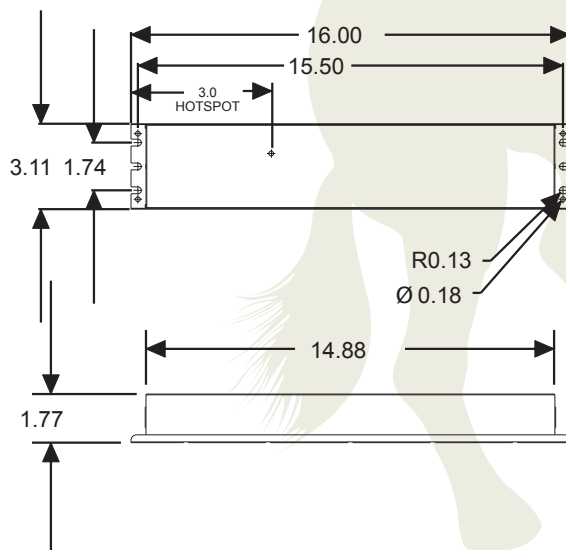

WIRING DIAGRAMS

WIRE	BLK	WHT	YEL/BLK	RED/WHT	BLU/WHT	YEL	RED	BLUE
LENGTH-INCHES	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"

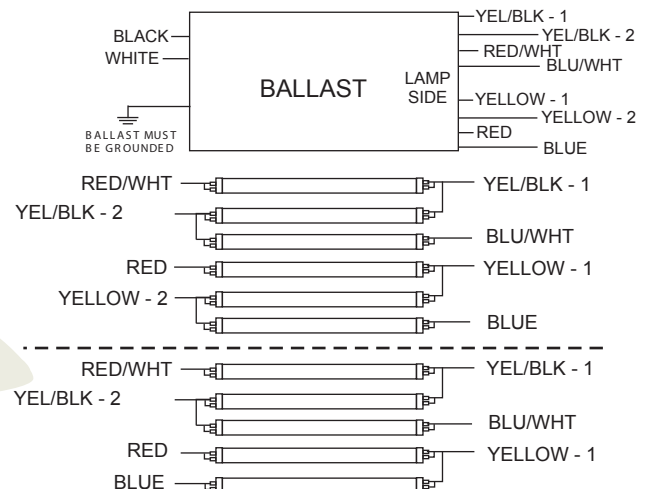

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.

2011-270-8 rev