

Sunnata Standalone Controls

Touch dimmer (and coordinating products) with next generation design and technology.

Features

- Touch technology with intuitive on/off paddle switch that fits in a standard designer wallplate opening.
- Advanced dimming technology designed for compatibility with a broad range of high efficacy bulbs.
- Dimmers and switches contain MyLevel Personalization Advanced Feature Mode to customize the control.
- Low-end and high-end adjustments to accommodate a wide range of bulbs.
- White light bar provides locator light to easily find the switch in the dark. Brightness of locator light is adjustable through MyLevel Personalization. Locator light can also be turned off.
- Can be used in single-pole, multi-location¹, or 3-way mechanical switch² applications.
- Coordinating Claro and Stainless Steel wallplates available separately.
- 100% factory tested.
- NEMA SSL-7A Compliant.
- UL® Listed.



*LED+ Dimmer
STCL-153M*



*Accessory Switch
ST-AS (works with STCL-153M only)*



*PRO Dimmer
ST-PRO-N*



*PRO Companion Dimmer
ST-RD (works with ST-PRO-N only)*



*Switch
ST-6ANS*



*Companion Switch
ST-RS (works with ST-6ANS only)*

NOTE: Main control will only work with companion or accessory shown to the right. Companions and accessories are not interchangeable.

¹ Sunnata standalone controls can be controlled from multiple locations when paired with the appropriate accessory or companion control pictured to the right of the main control above.

² LED+ models only. An additional wiring step is required for 3-way mechanical switch applications. Not for use in 4-way mechanical switch applications.

Job Name:	Model Numbers:
Job Number:	

Model Numbers

LED+ Dimmer

LED/CFL/Incandescent/Halogen (120 V~)

STCL-153M-XX^{1,2,3} (replaces STCL-153P-XX) 150 W (LED/CFL)* or 600 W Incandescent/Halogen

ST-AS-XX¹ (works with STCL-153M only) Accessory Switch (120 V~, max 9 per LED+ dimmer)

PRO LED+ Dimmer

LED/CFL/Incandescent/Halogen/MLV/ELV/Dimmable Fluorescent Ballasts/Hi-lume LTE Drivers (120 V~)

ST-PRO-N-XX¹ 250 W (LED/CFL)* or 500 W Incandescent/Halogen/ELV or
400 VA MLV phase selectable, neutral dimmer

ST-RD-XX¹ (works with ST-PRO-N only) PRO Companion dimmer (120 V~, max of 4 per PRO dimmer)

Switches

Lighting and Motor Loads (120 V~)

ST-6ANS-XX¹ 6 A Light, 1/10 HP 3 A motor neutral wire electronic switch

ST-RS-XX¹ (works with ST-6ANS only) Companion switch (120 V~, max of 4 per Sunnata switch)

* Go to www.lutron.com/ledfinder to see all compatible LED lamps.

Notes:

¹ XX" represents the color code.

² For clamshell packaging add "H" after "153M".

³ For clamshell packaged product for Canada add "-C" after the color code.

LUTRON SPECIFICATION SUBMITTAL

Page

Job Name:	Model Numbers:
Job Number:	

Colors and Finishes


Gloss - All models




White
WH



Ivory
IV



Light Almond
LA



Black
BL

Satin Finishes - PRO and Switch models only



Brilliant White
BW



Glacier White
GL



Snow
SW



Architectural
White
RW



Lunar Gray
LG



Mist
MI



Pebble
PB



Cobblestone
CS




Slate
SL




Midnight
MN



Biscuit
BI



Sand
SD




Taupe
TP



Pumice
PM



Clay
CY



Sage
SA



Espresso
EP



Truffle
TF



Deep Sea
DE



Signal Red
SR

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:
Gloss Finishes: DG-CK-1
Satin Finishes: SF-CK-1
For coordinating wallplates and accessories, visit lutron.com/claro

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- UL® Listed to U.S. and Canadian safety requirements (UL 1472/CSA C22.2 184.1)
- NOM
- NEMA SSL-7A-2015 forward-phase compliant
- FCC, IC (not applicable to ST-AS)

Environment

- For indoor use only
- Operating temperatures 32 °F (0 °C) to 104 °F (40 °C)

Performance

- Power-failure memory
- Touch the dimmer to go to any light level (-PRO-N, -RD, and -153M only)
- Electrostatic discharge tested
- Precise color matching
- Includes a Front Accessible Service Switch (FASS) for safe bulb replacement (not applicable to ST-AS)

Application Requirements

- ***When using LEDs or CFLs, only bulbs marked or rated as Dimmable can be used.***
- To access our mobile friendly online tool of DIMMABLE LEDs visit www.lutron.com/LEDfinder

Warranty


- 1 Year Limited Warranty.
For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name:	Model Numbers:
Job Number:	


LED+ and Accessory Switch Dimensions

PRO and Companion Dimensions

Wired Product

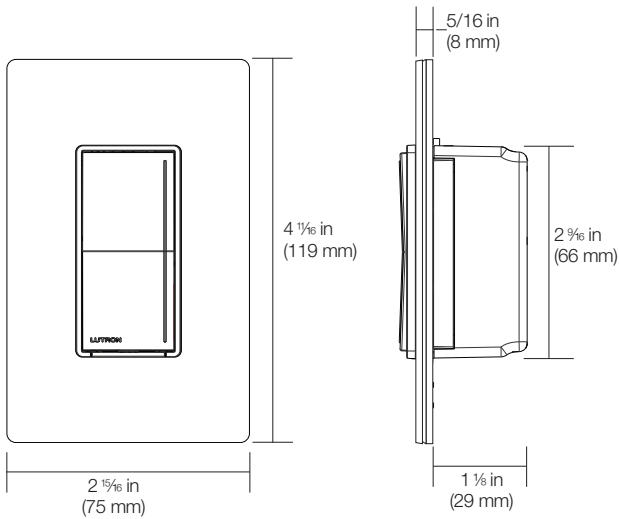


Screw Terminal Product

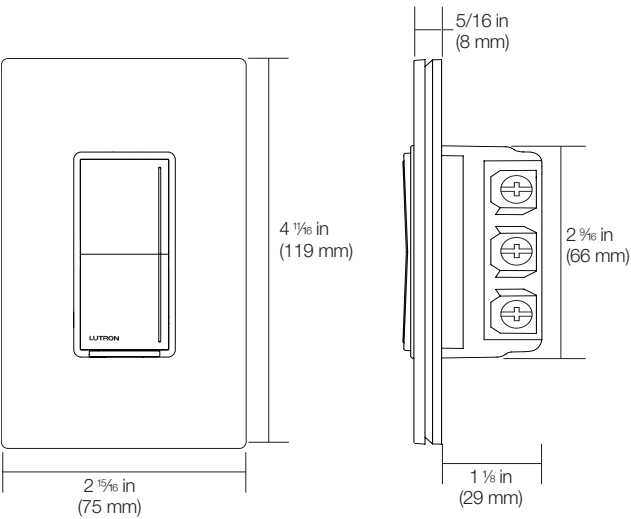

Note: Requires a U.S. wallbox 2 1/4 in (57 mm) deep minimum.

Mounting and Parts Identification

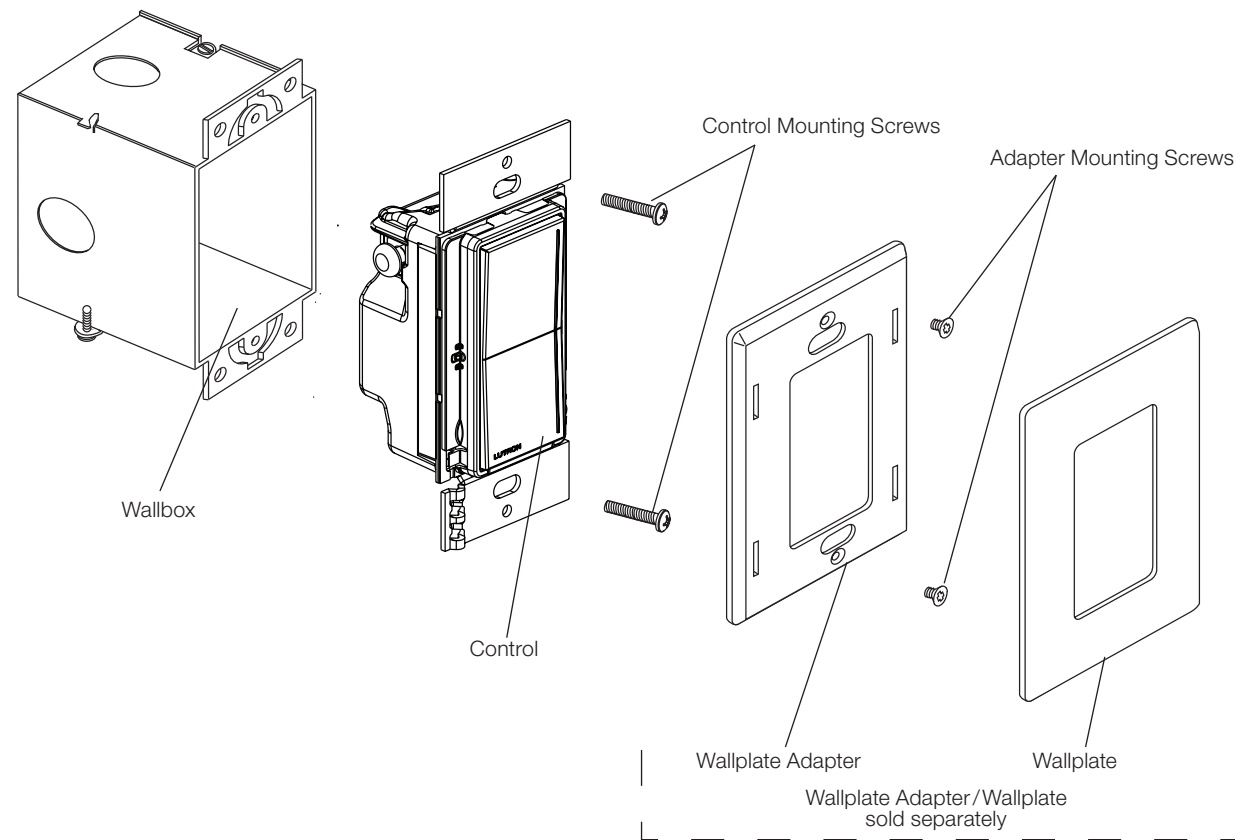

Job Name:	Model Numbers:
Job Number:	



Model Compatibility

Model Number	Description	Neutral Required	Compatible with Mechanical Switch?	Companion	Number of Locations	Identical Companion (appearance and functionality)	Load Types Controlled (other than LED/CFL/INC/HAL)
STCL-153M	LED+ Dimmer	No	Yes ¹	ST-AS	10	No	N/A
ST-PRO-N	PRO Phase Selectable Dimmer	Yes	No	ST-RD	5	Yes	MLV/ELV/Dimmable Fluorescent Ballasts/Hi-lume LTE Drivers
ST-6ANS	Switch	Yes	No	ST-RS	5	Yes	Lighting and Motor loads

¹ LED+ models only. An additional wiring step is required for 3-way mechanical switch applications. Not for use in 4-way mechanical switch applications.

Job Name:	Model Numbers:
Job Number:	

Load Type and Capacity

							
Load Type	Minimum Load	A Not Ganged	B End of Gang	C Middle of Gang	Neutral Connection	Required Phase Mode ²	
STCL-153M ³							
LED	1 LED	150 W	150 W	150 W	No	—	
CFL	1 CFL bulb	150 W	150 W	150 W	No	—	
Incandescent /Halogen	25 W	600 W	500 W	400 W	No	—	
ST-PRO-N ^{3,4}							
LED	1 LED	250 W	200 W	150 W	Required ¹	Either	
MLV Transformer with LEDs	See Application Note #559 (P/N 048559) at www.lutron.com No Derating Required					Forward	
ELV Transformer with LEDs						Reverse	
MLV Transformer with Halogen	10 W	400 VA (300 W)	No Derating Required			Forward	
ELV Transformer with Halogen	10 W	500 W	400 W	300 W		Reverse	
Incandescent /Halogen	10 W	500 W	400 W	300 W		Either	
Dimmable Fluorescent Ballast	1 ballast	3.3 A (400 VA)	No Derating Required			Forward	
Hi-lume 1% 2-wire (LTE) LED Driver	1 driver	3.3 A (400 W) 20 drivers max.	No Derating Required			Forward	
PHPM-PA/3F and GRX-TVI ⁴	1 interface	3 interfaces	No Derating Required			Forward	
ST-6ANS ^{4,5,6}							
LED Lighting	1 LED	6 A	4 A	4 A	Required ¹	—	
Other Lighting Loads	10 W/VA	6 A	4 A	4 A		—	
Motor	0.08 A	1/10 HP 3 A	1/10 HP 3 A	1/10 HP 3 A		—	

¹ Neutral is required for all load types.

² Phase Mode default setting is Reverse-Phase. (-PRO-N only)

³ Do not install dimmers to control receptacles or motor-operated appliances.

⁴ Power boosters/Load Interfaces: -ST-PRO-N and -ST-6ANS can be used to control power boosters/load interfaces. For a list of compatible power boosters/load interfaces see **Compatible Power Boosters and Load Interfaces**, page 8.

⁵ Do not install switches to control receptacles.

⁶ Switch Load Type:

-6ANS: Designed for use with permanently installed 120 V~ incandescent, MLV, ELV, tungsten halogen, fluorescent, LED, CFL, or motor loads.

Note: For dimming MLV fixtures, the maximum lamp wattage is typically 70%-85% of the transformer's VA rating. For actual transformer efficiency, contact the manufacturer. The total VA rating of the transformer(s) shall not exceed the VA rating of the dimmer.

Job Name:	Model Numbers:
Job Number:	

Example: If you have two dimmers ganged together and you have two 13 W bulbs installed (total LED Wattage = 26 W) on one dimmer, you may add up to 300 W of incandescent or halogen lighting to that one dimmer. Repeat the exercise for the other dimmer with which it is ganged.

Total LED/CFL Wattage	Total Incandescent/Halogen Wattage						Neutral Connection
	A Not Ganged		B End of Gang		C Middle of Gang		
STCL-153M ¹							
0 W	+	600 W	Or	500 W	Or	400 W	No
1 W-25 W	+	500 W	Or	400 W	Or	300 W	
26 W-50 W	+	400 W	Or	300 W	Or	200 W	
51 W-75 W	+	300 W	Or	200 W	Or	100 W	
76 W-100 W	+	200 W	Or	100 W	Or	50 W	
101 W-125 W	+	100 W	Or	50 W	Or	0 W	
126 W-150 W	+	0 W	Or	0 W	Or	0 W	
ST-PRO-N ¹							
0 W	+	500 W	Or	400 W	Or	300 W	Required
1 W-50 W	+	400 W	Or	300 W	Or	200 W	
51 W-100 W	+	300 W	Or	200 W	Or	100 W	
101 W-150 W	+	200 W	Or	100 W	Or	0 W	
151 W-200 W	+	100 W	Or	0 W	Or	0 W	
201 W-250 W	+	0 W	Or	0 W	Or	0 W	

¹ Do not install dimmers to control receptacles or motor-operated appliances.

Job Name:	Model Numbers:
Job Number:	

Compatible Power Boosters and Load Interfaces

Some local controls can be used to control power boosters or load interfaces. Up to three power boosters or load interfaces can be used with one control. See table below for a list of controls and compatible power boosters and load interfaces.


Control	Phase Adaptive Power Modules: PHPM-PA-120-WH; PHPM-PA-DV-WH	3-wire Fluorescent Power Modules: PHPM-3F-120-WH; PHPM-3F-DV-WH	Switched Power Module: PHPM-SW-DV-WH	0–10 V _{DC} Interface and Switching Module: GRX-TVI
STCL-153M				
ST-PRO-N	✓	✓		✓
ST-6ANS			✓	

Job Name:	Model Numbers:
Job Number:	

Operation


LED+ Dimmer

Dimming from LED+ dimmer only

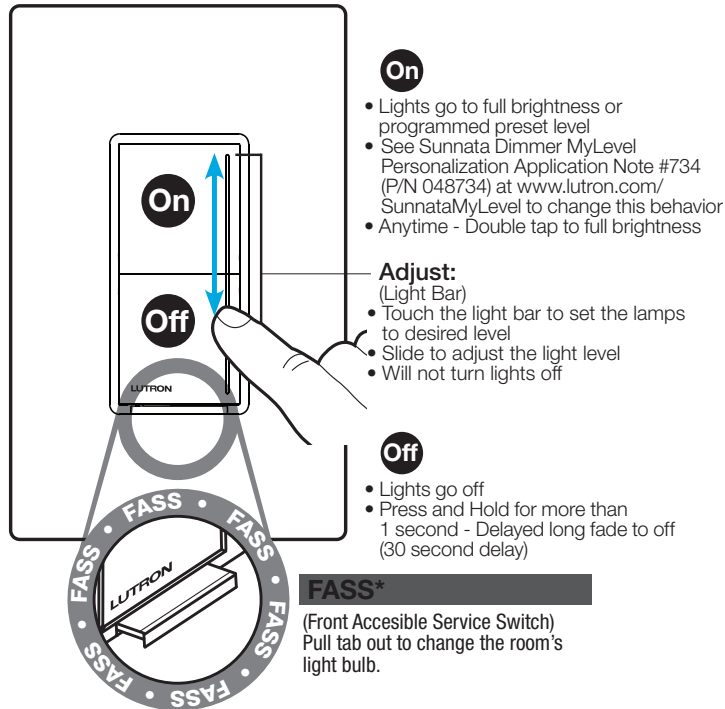


Accessory Switch

ON/OFF only from accessory switches

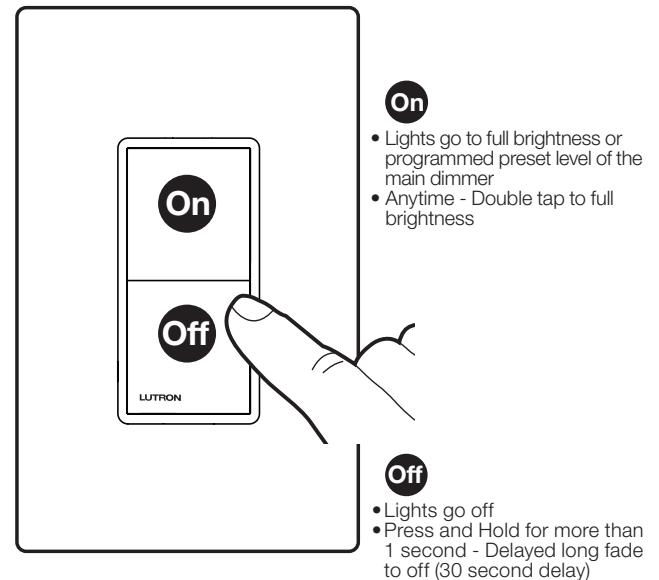


PRO Dimmer and Companion Dimmer

Dimming from PRO dimmer and all companion dimmer locations

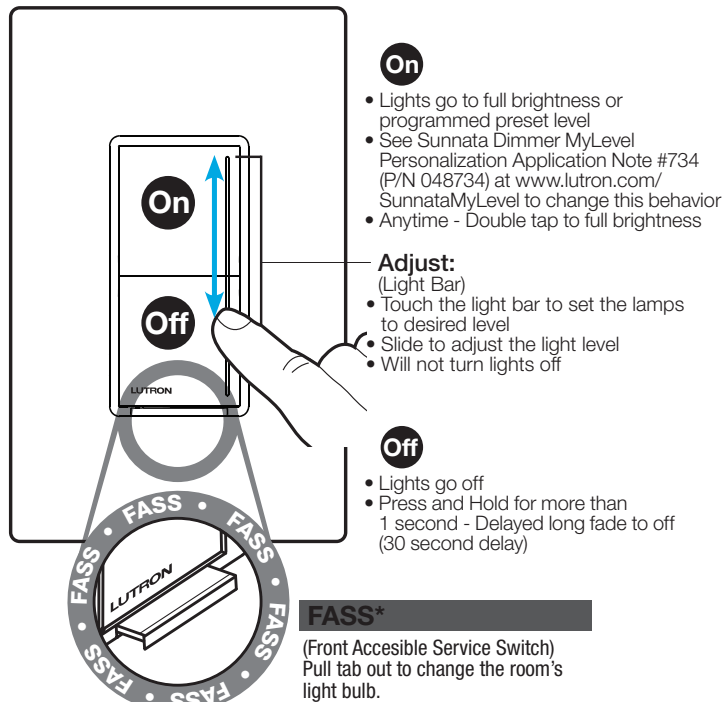

Switch and Companion Switch

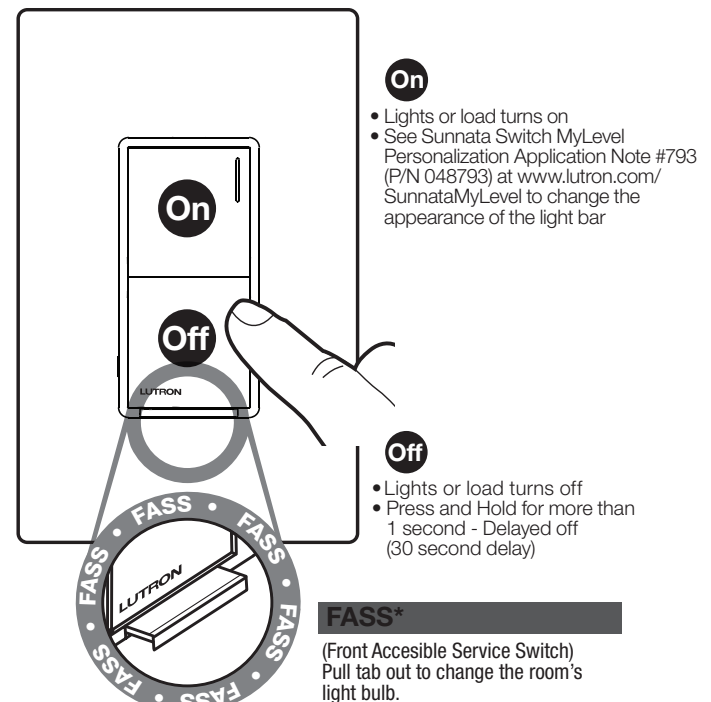

* FASS switch is **ONLY** for changing light bulbs in permanently wired fixtures. Changing wiring or installing dimmers/switches/companion controls requires turning off the breaker at the breaker panel.

LUTRON SPECIFICATION SUBMITTAL

Page

Job Name:	Model Numbers:
Job Number:	

MyLevel Personalization Advanced Features

Sunnata dimmers and switches contain advanced features that allow users to customize the control to meet their specific needs. For a detailed description of the features and uses, please refer to the Sunnata Dimmer MyLevel Personalization Application Note #734 (P/N 048734) or Sunnata Switch MyLevel Personalization Application Note #793 (P/N 048793) at www.lutron.com/SunnataMyLevel. Before entering MyLevel, it is important to have a good understanding of the features.

Available Dimmer MyLevel Personalization Advanced Features	
Feature	Description
High-end trim	Select the maximum available light limit. Default - Highest level of trim range.
Low-end trim	Select the minimum available light limit. Default - Middle level of trim range.
Preset light level	Change the behavior of the control when the ON button is pressed from the OFF state to ON. Default - Tapping the ON button always sets the lights to full (locked preset at high-end).
Light bar brightness	Select between high, medium, and low brightness of the control's light bar. Default - Medium brightness.
Light level indicator/locator light*	Select between ON and OFF for the light bar when the lights are on (light level indicator) and when the lights are off (locator light). Default - ON/ON.
Phase select (PRO-N only)	Select the Phase mode in which the dimmer operates. Forward or Reverse (Default).
Restore factory default settings	Select to return dimmer to its original factory settings.


* The dimmer light bar will always illuminate when interacting with the dimmer to indicate the light level setting.

Available Switch MyLevel Personalization Advanced Features	
Feature	Description
Light bar brightness	Select between high, medium, and low brightness of the control's light bar. Default - Medium brightness.
Light level indicator/locator light	Select between ON and OFF for the light bar when the lights are on (light level indicator) and when the lights are off (locator light). Default - ON/ON.

Job Name:	Model Numbers:
Job Number:	

Wiring Diagrams

Single Pole Wiring: STCL-153M

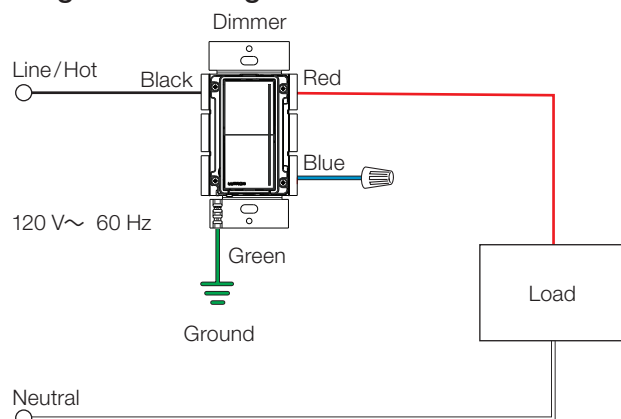


Single Pole Application:


- Black and red wires are interchangeable in this application.
- Cap the blue wire with the supplied wire connector.
- Do not connect the blue wire to any other wiring or to ground.

3-Way Wiring (Using 3-Way Mechanical Switch): STCL-153M

Dimmer Line Side

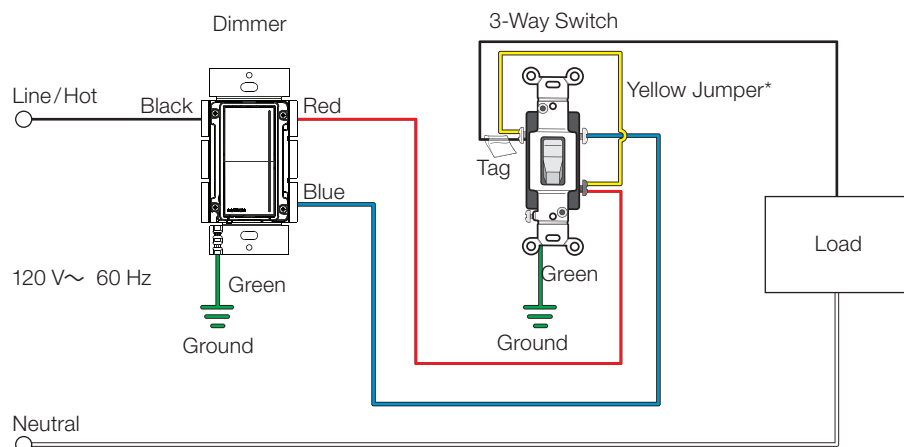

Dimmer Load Side

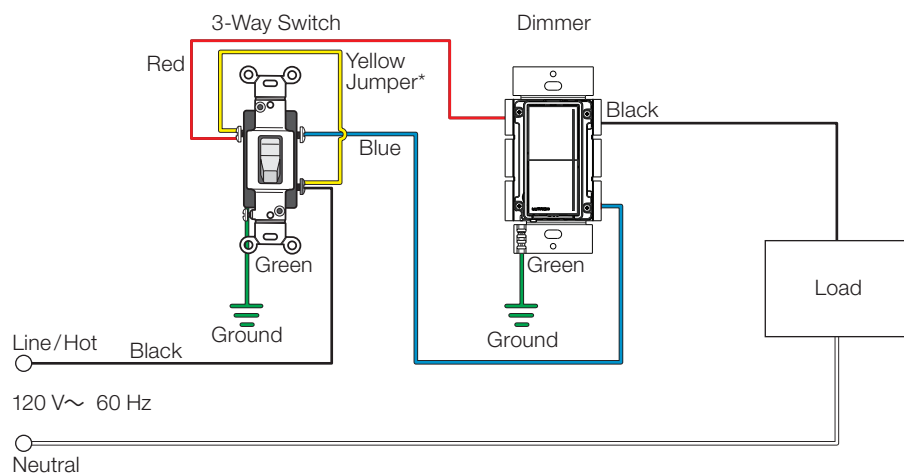


* Yellow jumper wire is included in the dimmer packaging.

Job Name:	Model Numbers:
Job Number:	

Wiring Diagrams (continued)


Wiring (Using Sunnata Accessory Switch¹): STCL-153M with ST-AS

Dimmer Line Side

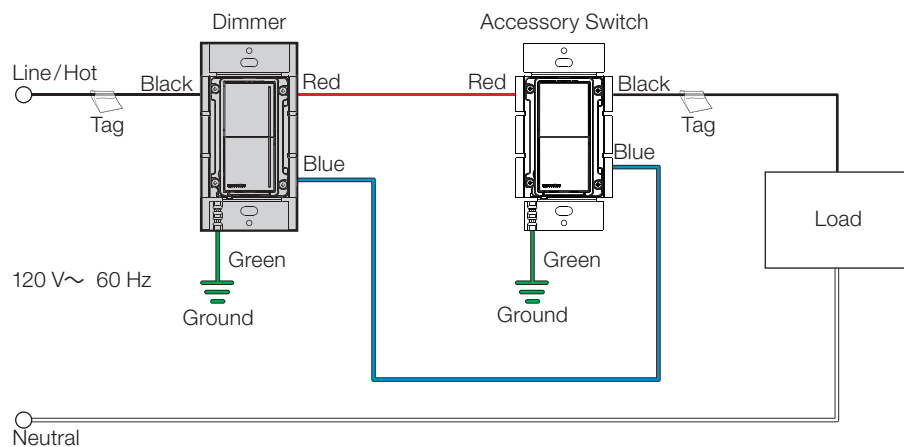

Note: ST-AS is NOT compatible with STCL-153P, it works only with STCL-153M.

Dimmer Load Side

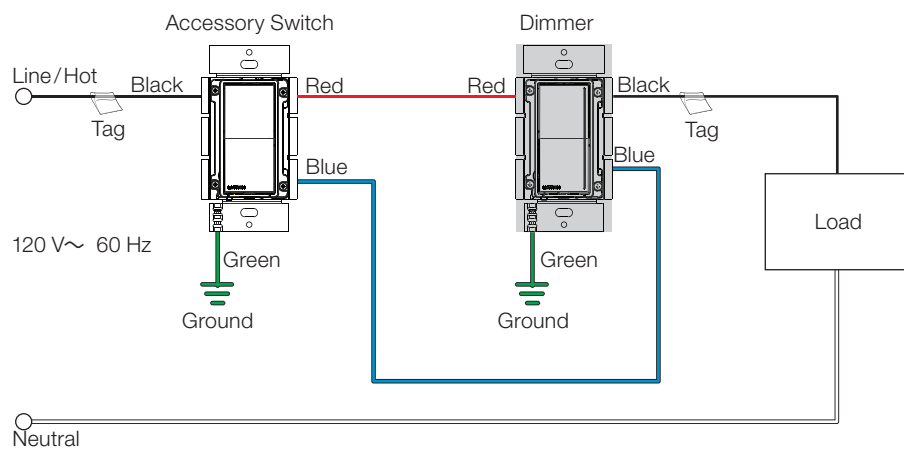

Job Name:


Model Numbers:

Job Number:

Wiring Diagrams (continued)


4-Way Wiring (Using Sunnata Accessory Switch(es)^{1,2}): STCL-153M with ST-AS

Dimmer Line Side

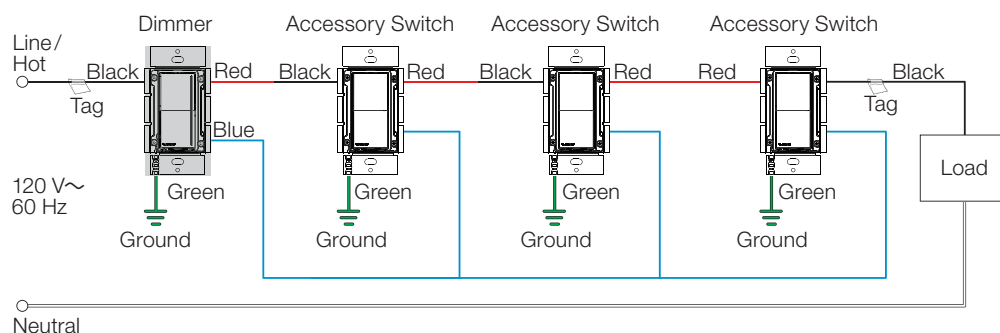


Note: ST-AS is NOT compatible with STCL-153P, it works only with STCL-153M.

Dimmer Load Side

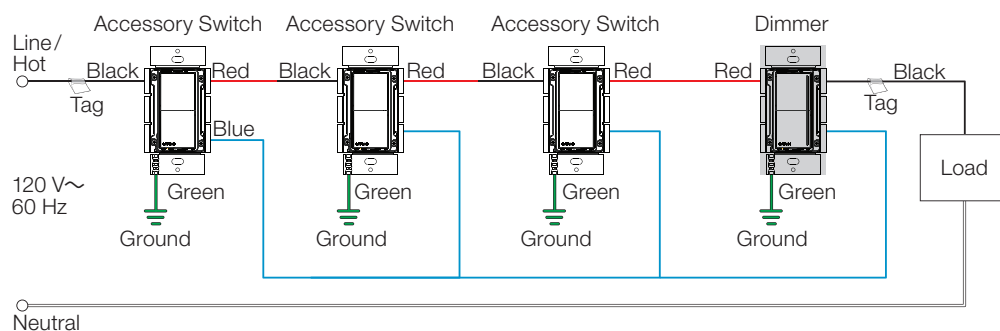

Dimmer in the Middle

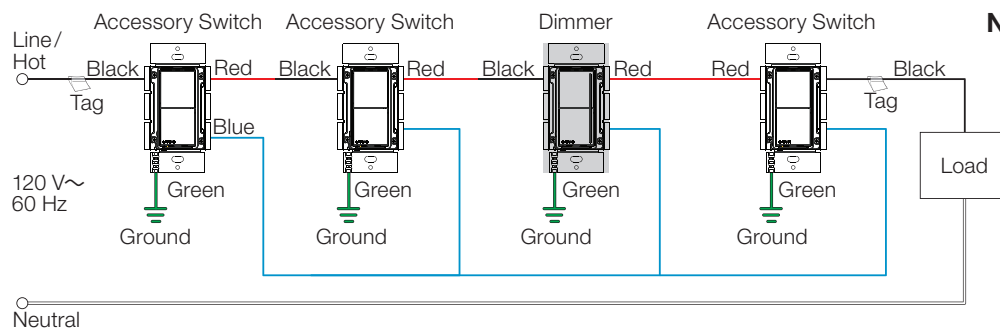

Note: Main dimmer can go in any location.

¹ ST-AS, Sunnata accessory switch is NOT compatible with STCL-153P, it works only with STCL-153M.

² Up to nine (9) accessory switches may be connected to the dimmer. Total blue wire connection wire length may be up to 150 ft (45 m).


Job Name:

Model Numbers:

Job Number:

Wiring Diagrams (continued)

Single-Location Installation¹ with required Neutral: -PRO-N, -6ANS

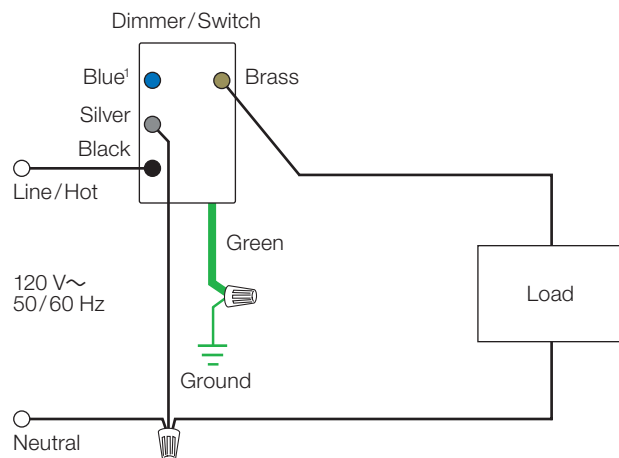


Note: Ground connection is a 18 AWG (1.0 mm²) green wire.

¹ When using controls in single-location installations, tighten the blue terminal. Do not connect the blue terminal to any other wiring or to ground.

Multi-Location Installation with required Neutral: -PRO-N with -RD OR -8ANS OR -6ANS with -RS

Note: Dimmer and switch must be on the load side

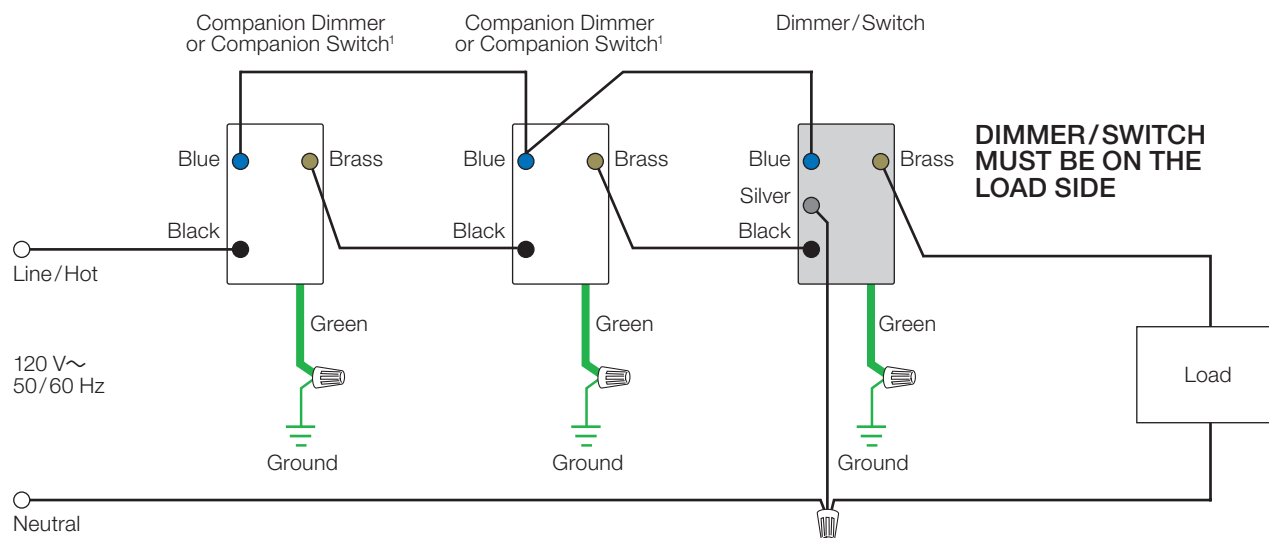

Note: Ground connection is a 18 AWG (1.0 mm²) green wire.

¹ Up to four companion dimmers/companion switches may be connected to the dimmer/switch. Total blue terminal wire length may be up to 150 ft (45 m).

The Lutron logo, Lutron, Claro, FASS, LED+, Hi-lume, MyLevel, and Sunnata are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries. All other product names, logos, and brands are property of their respective owners.

LUTRON SPECIFICATION SUBMITTAL

Page

Job Name:	Model Numbers:
Job Number:	