

PROJECT NAME: \_\_\_\_\_ CAT. #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_ FIXTURE SCHEDULE: \_\_\_\_\_

## LOW VOLTAGE SENSOR FOR ARCMAX

Microwave Sensor

[Product Page](#)

[Instruction Manual](#)




### Features:

- Suitable for Ceiling light, Troffers, Triproof light, Linear lights and LED tubes
- Provide Line voltage On/Off switching and 0-10VDC dimming control
- Remote Control Capability


### Warranty:

1-year standard warranty. (details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))


### Accessories (SOLD SEPARATELY)

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
104891	RMHD05R	Remote control	

### Dimensions:

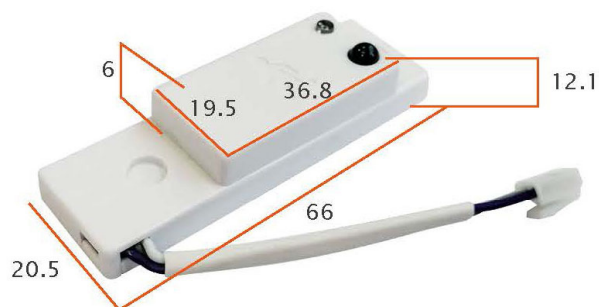

### Wiring Diagram:

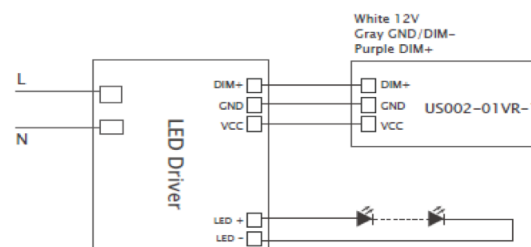

# LOW VOLTAGE SENSOR FOR ARCMAX


## Microwave Sensor

[Product Page](#)
[Instruction Manual](#)

### Specifications

	105321 / MSHD016V-M-X-X-W
Operating Voltage	10.5 - 15V DC (Supply current > 50mA)
Operating Current	<30mA
Output	DIM/1-10V
Stand-by-power	<0.5W
Control line	Cable length 60mm, White 12V, Gray GND/DIM-, Purple DIM+
Detection area	100%/75%/50%/25%
Hold - time	5s/ 30s/ 1 min/ 3 min/ 5 min/ 10 min/ 20 min/ 30 min
Daylight threshold	21lux/ 10lux/ 30lux/ 50lux/ 80lux/ 120lux/ Disable
Stand-by period	0s/ 10s/ 30s/ 1min/ 5 min/ 10 min/ 30 min +∞
Stand-by dimming level	10%/20%/30%/50%
Microwave power	<0.3mW
Mounting height	Max. 5m (Ceiling Mounted)
Detection range	DxH. (Radius) 1.5-4mx5m (Ceiling Mounted)
Detection angle	360° (ceiling mounted); <150° (Wall Mounted)
Operating Temperature	(-40°C to 80°C)
Size	60x20.5x12.1mm

### Detection Coverage:

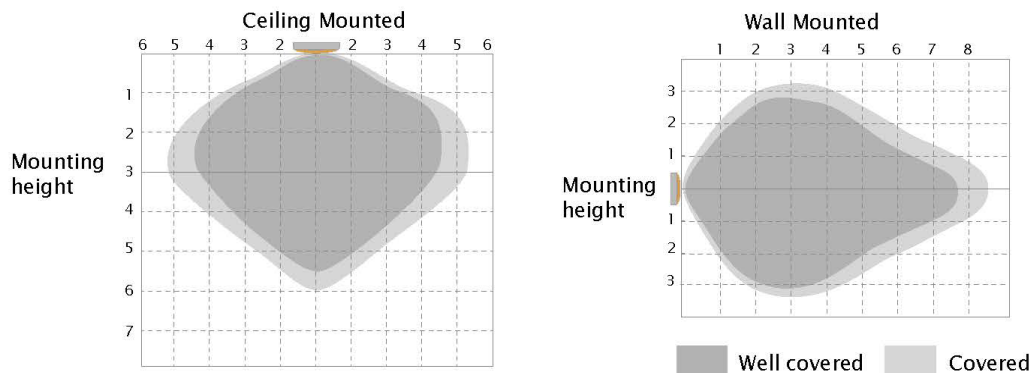

# Application

## 1. Automatically ON/OFF function:

The Stand-by period is set to "0s".

Light on when detect movement and off after people leave at night. Applications: Corridor, Staircase.



With sufficient daylight, even when motion detected, light remains OFF.



With insufficient daylight, when motion detected, light ON.



After the last detection and the present hold time elapsed, light OFF.

## 2. No daylight function


The daylight threshold is set to "Disable".

Light on when detect movement, After people leave, Light off after stand-by period.


Applications: Dim places such as Basement Parking, Underpass.



When motion is detected, the sensor will switch on the light to 100% brightness.

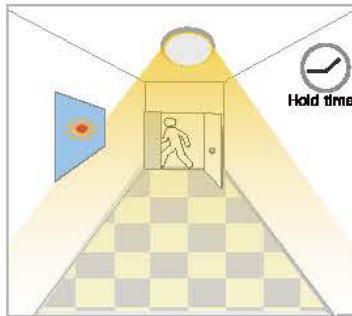

After people leave the detection area, light remains 100% brightness within hold time.

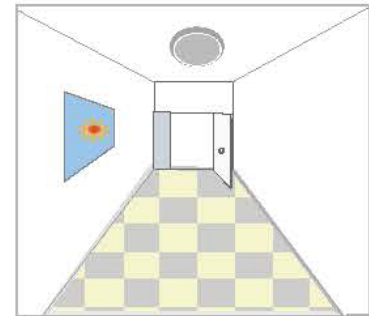

After the last detection and the present hold time elapsed, light OFF.

## 3. Function Demo - Dimmable control/Corridor function



With sufficient daylight, even when motion detected, light remains OFF.



With insufficient daylight, when motion detected, light ON.



After last detection, the light will be dimmed down to the stand-by dimming level (10%,20%, 30%,50%) after holdtime.



After the stand-by period, light OFF.

## Attention

---



1. Please read the instructions carefully before using this product and keep it well for all users to read at any time.
2. The sensor should be installed by qualified electrician and ensure power is off before the installation.
3. We reserve the right to modify any incorrect text, image and necessary technical parameters.
4. Any unauthorized modification is forbidden, otherwise all guarantees will be immediately invalid.

## Installation precautions

1. Microwave sensor can be installed in any lamp except the one with full metal shell.
2. The detected surface cannot be shielded by metal objects.
3. Make sure the microwave module is completely exposed outside.
4. The detection surface of the sensor module shall be installed facing the detection area.
5. Should be kept away from the driver to avoid interference generation and lamp flashing.
6. Wiring must be strictly in accordance with the wiring diagram to avoid short circuit.


## Application Environment

1. Suitable for indoor installation to avoid false triggering due to external factors such as rain, wind or tree swing.
2. Shall not be installed in the place with all four metal shelters and small space (such as galvanized-iron roof ).
3. Shall note be mounted installation, so as to avoid false trigger caused by the lamp itself shaking.
4. Shall not be installed next to large operating machines such as ventilator/ceiling fan to avoid false triggering caused by machine vibration.

## User Notes

1. Microwave can penetrate walls or glass thinner than 20cm and attenuate if thicker than 20cm.
2. The driver voltage shall be stable and float within 10%.
3. Detection area will be affected by speed of motion, mounting height and movement volume.
4. Conduct test on sunny days without the lampshade which will affect the tested lux value

## RMHD05R Functions:

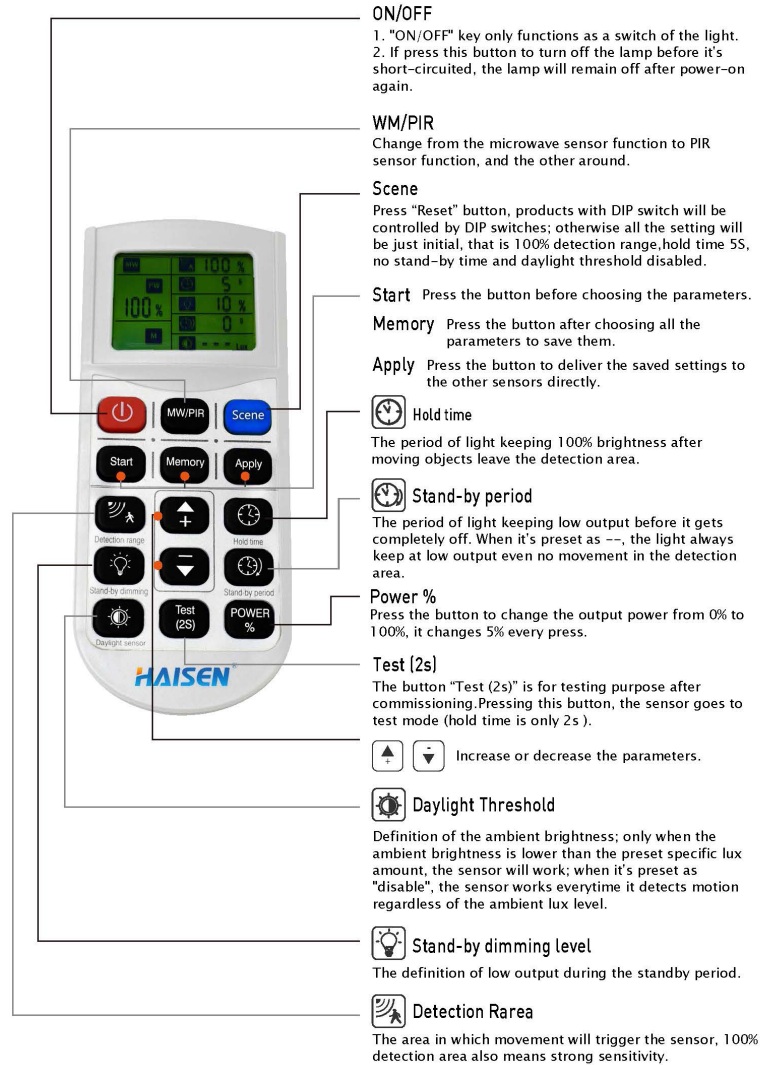

## RMHD05R Instruction:

### Memory & Apply Mode

1. Press "ON/OFF button" to turn on the light or off.
2. To reset the parameters, Please follow the steps as below:  
 Step 1 – Press ON, to turn on the light if it was off at the start.  
 Step 2 – Press "Start" to the well-setting sensor.  
 Step 3 – Press the button of Detection range, Hold time, Stand-by dimming level, Stand-by period and Daylight threshold one after the other in sequence (Press "+/-" to set parameters).  
 Step 5 – Press "Memory" to memorize the settings.  
**Note: The interval of each parameter setting shall be controlled within 30s.**
3. To programme other lights in the array that have similar sensors to the same programme.  
 Step 1 – Press "ON" to the second sensor  
 Step 2 – Press "Apply"

### Isolated Setting Mode

1. Press "ON/OFF button" to turn on the light or off. Press "Scene", the remote will activate settings that were saved last or remain at the factory default settings.
2. To reset the parameters, Please follow the steps as below:  
 Step 1 – Press ON, to turn on the light if it was off at the start.  
 Step 2 – Press any button of "Scene", Test and "Apply" to begin the sensor detection mode.  
 Step 3 – Press the button of Detection range, Hold time, Stand-by dimming level, Stand-by period and Daylight threshold one after the other in sequence.

#### Notes:

1. Settings will be saved automatically and remain until you press reset again.
2. Light will flicker when setting each parameter.
3. The icon will flash when setting the corresponding parameter.