

Philips MainsFit LED Tube

WARNINGS, CAUTIONS AND OPERATING INSTRUCTIONS

WARNING: "THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED."

1. Risk of fire or electric shock. The electrical rating of these products are 120~277V, the installer must determine whether they have 120~277V at the luminaire before installation.
2. Risk of fire or electric shock. Luminaires wiring, ballasts, or other electrical parts may be damaged when installing of reflector kit hardware. Check for enclosed wiring and components.
3. Risk of fire or electric shock. LED Retrofit kit installation requires knowledge of fluorescent lighting luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
4. Warning – Risk of fire or electric shock. install this kit only in the luminaires that has the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.
5. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
6. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
7. Installers should not disconnect existing wires from lampholder terminals to make new connections at lampholder terminals. Instead installers should cut existing lampholder leads away from the lampholder and make new electrical connections to lampholder lead wires by employing applicable connectors.
8. THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION.

SUITABLE FOR DRY OR DAMP LOCATIONS.

DO NOT USE WITH DIMMERS

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE

(2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

This Class A digital apparatus complies with Canadian ICES-005

© 2018 Signify Holding

 Signify

Signify reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

11/18 www.philips.com/lighting



Signify North America Corporation
200 Franklin Square Drive
Somerset, NJ 08873, USA
Tel. 800-555-0050


Imported by: Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Tel. 800-668-9008

3241 653 32733

PHILIPS

Guide d'installation

Tube DEL MainsFit –
Connexion directe à la tension de ligne c.a. (120-277V)

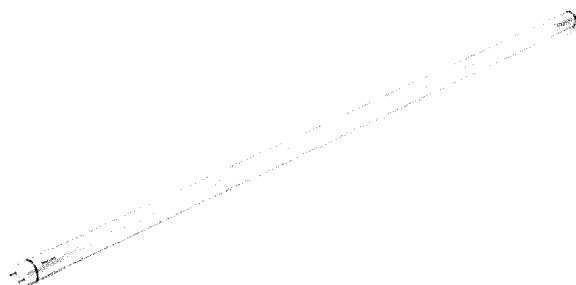

Contrairement aux lampes fluorescentes qui exigent un ballast pour fournir l'éclairage, le tube DEL MainsFit Philips est conçu pour un fonctionnement sur la tension de ligne c.a. (120 – 277 V), sans qu'un ballast/pilote soit nécessaire.

Ce guide d'installation fournit des étapes d'installation importantes pour un fonctionnement et une installation adéquats et sécuritaires des tubes DEL MainsFit Philips. Si vous avez des questions ou des commentaires, n'hésitez pas à contacter Signify au numéro 1 800-555-0050 (USA) ou 1 800-668-9008 (Canada).

- Le tube DEL MainsFit Philips convient au remplacement des lampes fluorescentes (T5) des luminaires munis de douilles de type G5*.

* Les douilles de type G5 sont les plus courantes dans les luminaires fluorescents T5.

RoHS
COMPLIANT

UL
C US

CLASSIFIED
UL
C US