



SPECIFICATION SHEET : SC-230-120-LT12

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,
*** Meets Energy Star 4.0 Criteria For Applications Listed.**

This Ballast Will Operate Following Lamps.




F20T12

ELECTRICAL DATA

INPUT VOLT: 230V $\pm$ 10%, 50/60Hz							
LAMP WATTS/TYPE	F20T12	-	-	-	-	-	-
LAMPS OPERATED	1						
INPUT WATTS	20.57						
LINE CURRENT:	0.168						
POWER FACTOR	0.532						
BALLAST FACTOR	0.905						
EFFICACY FACTOR	4.402						
THD	149.10						
CURRENT CREST FACTOR	< 1.7						
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)						
SOUND RATING	" A "						
BALLAST TYPE	RAPID START						
VOLTAGE TRANSIENTS	ANSI 62.41						
INPUT/PROTECTION	FUSE						
OUTPUT/PROTECTION	EOL						
MIN. OPERATING TEMP	0 $^{\circ}$ C (32 $^{\circ}$ F)						
MAX. CASE TEMP	75 $^{\circ}$ C (167 $^{\circ}$ F)						


MECHANICAL DATA

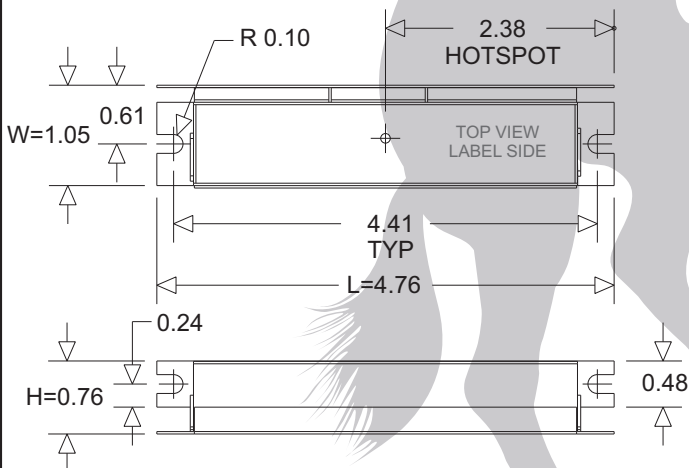

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 $\pm$ 1"	12 $\pm$ 1"	24 $\pm$ 1"	24 $\pm$ 1"		

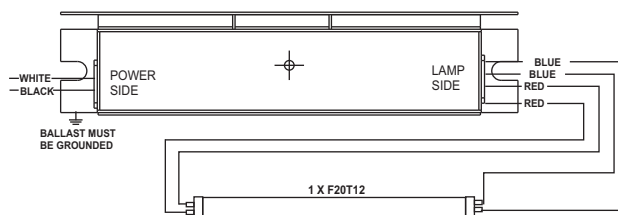

NOTE : This Ballast Case Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 2 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-800-2-Fulham.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-800-2-fulham, Fax.: 1-323-754-9060. Website: www.fulham.com

2006-37 rev B