

by (Signify

LED Driver

Xitanium

LED120A0024V33F





Long-lasting and low maintenance, LED-based light sources are an excellent solution for all lighting applications. For optimal performance, these solutions require reliable drivers matching the long lifetime of the LEDs. **The Advance Xitanium LED Outdoor Driver portfolio** offers a range of products specially designed to operate LED solutions in outdoor applications. These drivers are designed for hard-wired integration into outdoor luminaires even in rugged applications. They operate to specification under wide temperature and electrical ranges to help ensure reliability.

Specifications


Input Voltage (Vac)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency@ Max Load and 70°C Case	Max Case Temp. (°C)	Input Current (A)	Max. Input Power (W)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protec- tion (Com- bi-Wave, KV)	Envir. Protection Rating	Driver Type
120	80	24 Class 2 Output	0.8 -3.3	87	85°C	0.79	95	<20%	>0.95	2.5	UL damp & dry and Type HL	Constant Voltage

Enclosure

	In. (mm)
Case Length	8.38 (211.8)
Case Width	1.76 (42.5)
Case Height	1.1 (27.9)
Mounting Length	8.99 (228.4)
Overall Length	9.45 (240)
	· · · · · · · · · · · · · · · · · · ·



Wiring Diagram



Input and output use lead- wires.

Lead-wires are 18AWG 105C/600V solid copper.

Input Lead Length outside enclosure: 6" (+2"/-1").

Driver case must be grounded.

Warning

- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.



80W 120V 3.3A Fixed

Features

- UL Class 2 output
- · 50,000+ hour lifetime1

Benefits

- Flexibility and ease of design for Class 2 luminaire designs
- \cdot Enables long life luminaire designs

Application

- Signage
- · Parking garages
- Wallpacks

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Product Data

LED120A0024V33FM (Mid-Pack, 12pcs/Box)		
50/60Hz		
108 Vac		
132 Vac		
24Vdc		
<=35%		
Short Circuit, Open Circuit Protection for LED + and LED –		
-40°C to +60°C		
85°C		
UL dry and damp, Type HL		
UL879, UL1012, UL935, (cRUs)		
FCC Title 47 Part 15 Class A		
<24dB Class A		
1.4Lbs/ .635kgs		


Advance Xitanium LED Drivers are manufactured to engineering standards correlating to a designed and average life expectancy of 50,000 hours
of operation at maximum rated case temperature. Minimum 90% survivals based on MTBF modeling.

80W 120V 3.3A Fixed

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Driver Lifetime Vs. Driver Case Temperature

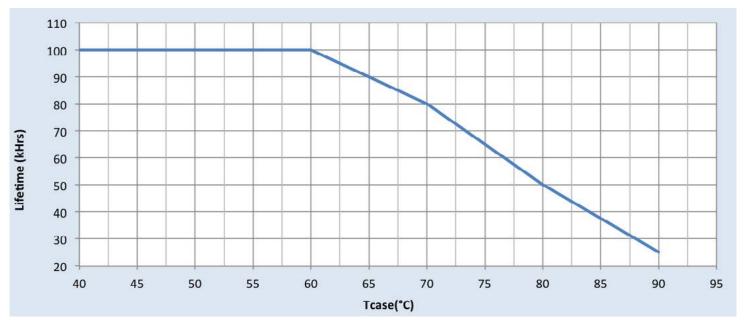


80W 120V 3.3A Fixed

Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Efficiency Vs. Output Voltage at Max Current

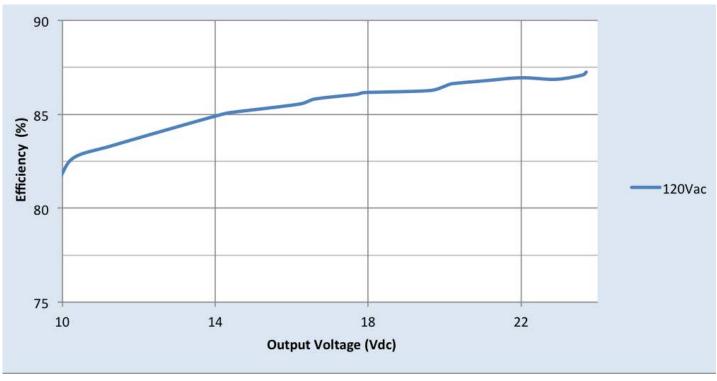


80W 120V 3.3A Fixed


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Power Factor Vs. Output Power

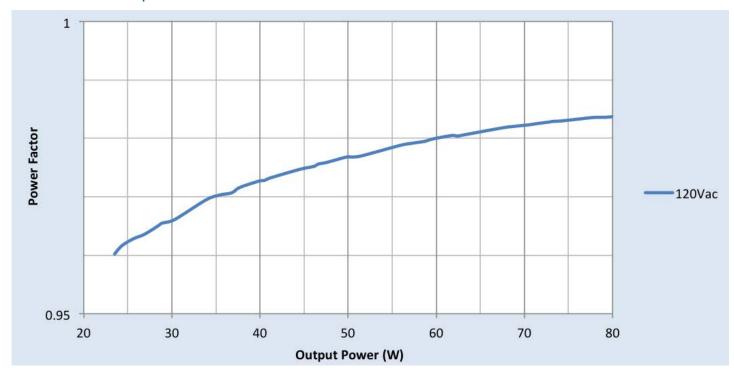


Total Harmonic Distortion (THD) Vs. Output Power

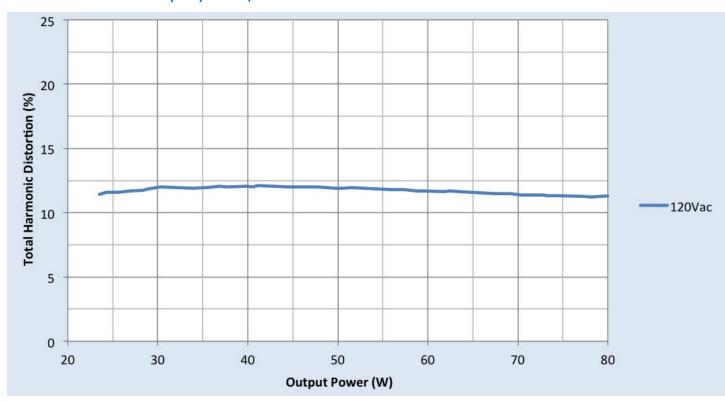

80W 120V 3.3A Fixed

Inrush Current Info

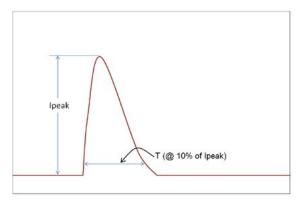

Vin	Ipeak	T (@ 10% of Ipeak)		
120 Vrms	23A	61µS		

Inrush current is measured at peak of the corresponding line voltage. Source impedance per NEMA 410.

Lightning Surge Info

ANSI Surge Type	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)	
1.2/50μs Combination Wave (w/t 2Ω)	2.5kV	2.5kV	

Isolation

Isolation	Input	Output	Enclosure	
Input	NA	2xU+1kV	2xU+1kV	
Output	2xU+1kV	NA	500V	
Enclosure	2xU+1kV	500V	NA	

U = Max input voltage

UL Conditions of Acceptability

Please contact your representative for a copy of the latest UL Conditions of Acceptability (COA).

 $The information\ presented\ in\ this\ document\ is\ not\ intended\ as\ any\ commercial\ offer\ and\ does\ not\ form\ part\ of\ any\ quotation\ or\ contract.$



2022 Signify Holding. All rights reserved. The information provided herein s subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included nerein and shall not be liable for any action in reliance thereon. The information or esented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation 400 Crossing Blvd, Suite 600 Bridgewater, NJ 08807 Telephone: 855-486-2216 Signify Canada Ltd. 281 Hillmount Road, Markham, ON, Canada L6C 2S3 Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners