

LED Emergency Back-Up

For LED T8 and T5 ballast bypass lamps.

Features

- 5 Watt or 10 Watt output power options
- Driver type: Constant wattage LED emergency
- Approximate lumens output 500lms~1000lms
- LED test switch and indicator light included
- Operating frequency: 50/60 Hz
- Max. current: 100mA@120v / 215mA@120v
- 1.8 Watt standby power
- 90 minute battery run time
- Output and over-power protection
- Recharge 24 hours max
- Lithium Ion battery
- 120-277V input
- Damp location
- 32°F-122°F (0°C-50°C)
Operating temperature
- 5 Year warranty

Compatibility


- Satco 4' T8 (S9720-S9723)
- Satco U-Bend (S9930-S9933)
- Satco 4' T5 LED bypass lamps (S29717-S29719)
- Satco 2G11 PL-L (S9950-9951)
- Satco 2' T8 (S29900-S29905)
- Satco 4' T8 (S11924, S29913-S29916)
- Satco 3' T8 (S29926-S29929)
- Satco 4' T8 (S29904-S29907)




Emergency battery backup and LED drivers.

Wiring Instructions

Single Ended Wiring

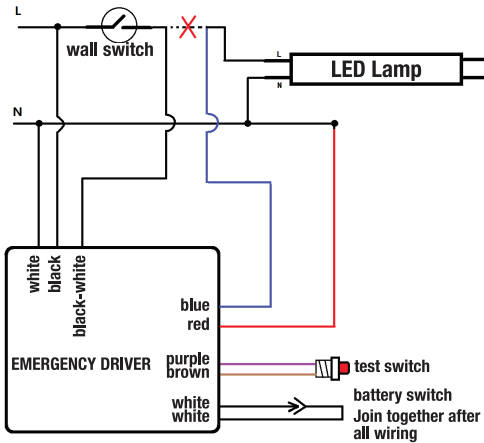


Double Ended Wiring

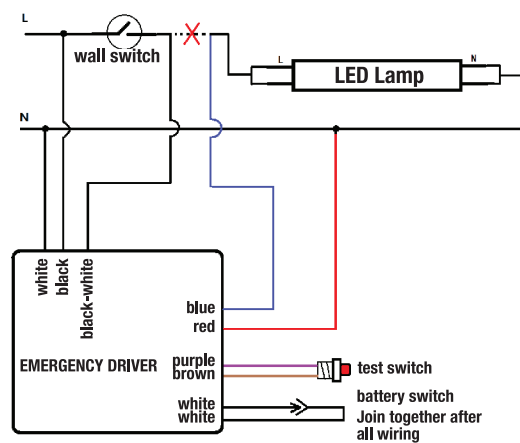


Dimensions

S8000

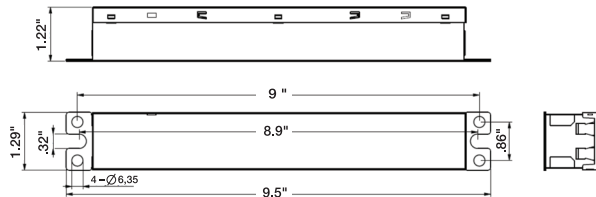

S8002

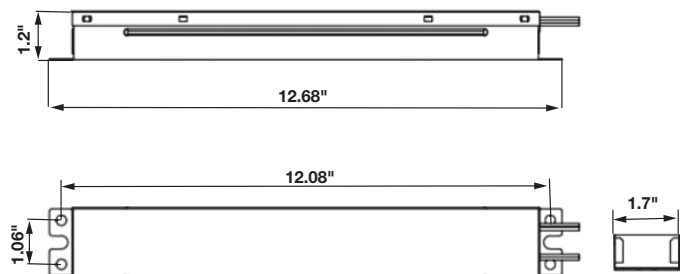

Emergency battery backup



Item #	Description	Watts	Voltage	M.O.L.	Max. Current	Dimensions	Power Factor	UPC	Case
S8000	5W Emergency LED driver	5	120-277	9.5"	100mA@120V	1.3"W x 1.22"H x 9.5"L	70.35	045923080005	25
S8002	10W Emergency LED driver	10	120-277	12.68"	215mA@120V	1.7"W x 1.20"H x 12.68"L	70.35	045923080029	12

Not for use with dimmers. Meets UL924, CEC Title 20, FCC15 Part 15 Class A, Compliance.