

# 400 Watt Pulse Start Lamp

# 73189

## DATA SHEET

UNIFORM PULSE START METAL HALIDE LIGHTING SYSTEMS FOR HORIZONTAL OPERATION



Horizontal  
Pulse Start



T15



Dia. = 2.0" (52mm)  
MOL = 11.5" (292mm)  
LCL = 7.0" (178mm)  
Base = Mogul (EX39)

## MP 400W/H75/T15/L/PS/740

### GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M135, M155/O
Bulb Shape	T15
Base Type	Mogul (EX39)
Bulb Finish	Clear
Rated Life	26000 hours
Operating Position	Horizontal ±75°

### ELECTRICAL

Lamp Watts	400
Lamp Oper. Voltage (Nom.)	135

### SUSTAINABILITY

Mercury Amount (mg)	40.0
Picograms of Hg per Mean Lumen Hour	51

### PHOTOMETRIC




Initial Lumens	38000
Lumens Per Watt	95
Lamp Lumen Depreciation (LLD)	0.80 (80%) @ 8000
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) $R_a$	68

### PHYSICAL

Bulb Diameter	2.0" (52mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	43.9mm
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	500
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated

### NOTES

- Lamp performance ratings published in this data sheet are based upon operation with magnetic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature: -40°C/°F.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).

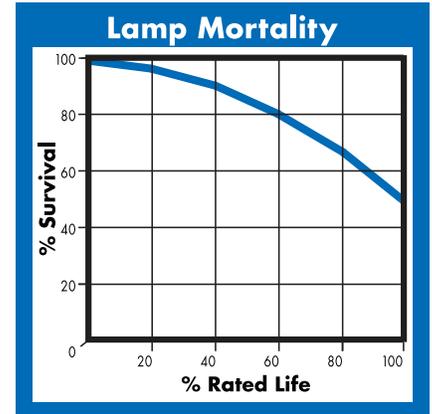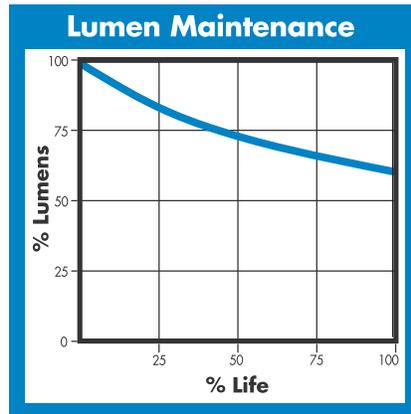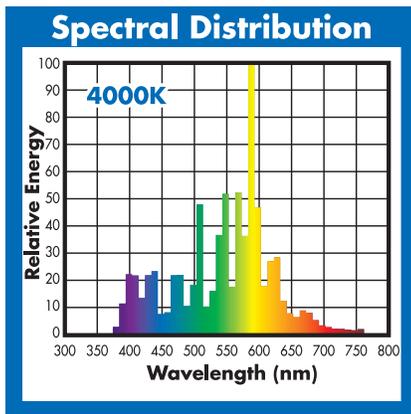

(800) 451-2606

6675 Parkland Blvd., Suite 100  
Solon, Ohio 44139 USA

E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

[VentureLighting.com](http://VentureLighting.com)

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30  
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.