



KT-LEDXXPLL-XXGC-8CSJ-D

4-PIN LED PLL TUBE

DESCRIPTION

LED PLL Tube | Color Select | 2G11 Base |
Type B Line Voltage Compatible



LAMP TYPE: LED PLL tube

BULB TYPE: 4-Pin LED

BASE TYPE: 2G11


WATTAGE: 8W, 10W, 16W, 17W

COLOR TEMPERATURE: 3000/3500/4000/5000/6500K

COLOR RENDERING INDEX (CRI): > 80

WARRANTY: 5 Years

L70: 50,000 hours

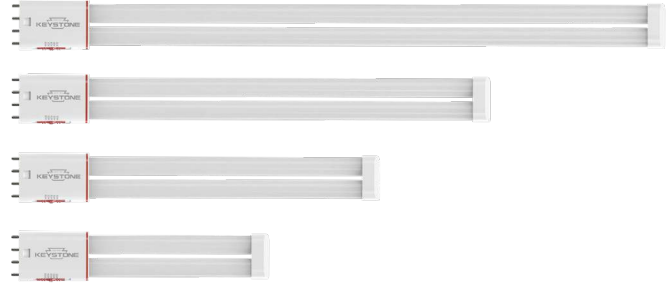

PRODUCT FEATURES

- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- Frost diffuser that eliminates pixilation and glare
- Environmentally friendly - no mercury used
- Instant startup
- UL 1598C Retrofit Kit
- UL Recognized Component
- Suitable for use in damp locations
- Not for use with dimmers
- Complies with Part 15 of FCC
- Not all items eligible for listing on DLC QPL

PERFORMANCE SPECIFICATIONS






Catalog Number	Wattage	CCT	Lumens	Efficacy	Input Voltage	CRI	Base Type	DLC	Nominal Length
KT-LED8PLL-9GC-8CSJ-D	8.5W	3000K	930	109 lm/W	120-277V	> 80	2G11	N/A	9"
		3500K	950	112 lm/W					
		4000K	980	115 lm/W					
		5000K	980	115 lm/W					
		6500K	980	115 lm/W					
KT-LED10PLL-12GC-8CSJ-D	10W	3000K	1,180	118 lm/W				N/A	12"
		3500K	1,200	120 lm/W					
		4000K	1,250	125 lm/W					
		5000K	1,250	125 lm/W					
		6500K	1,250	125 lm/W					
KT-LED16PLL-16GC-8CSJ-D	16W	3000K	1,900	119 lm/W				N/A	16"
		3500K	1,950	122 lm/W					
		4000K	2,000	125 lm/W					
		5000K	2,000	125 lm/W					
		6500K	2,000	125 lm/W					
KT-LED17PLL-22GC-8CSJ-D	17W	3000K	2,050	121 lm/W				Yes	22"
		3500K	2,150	126 lm/W					
		4000K	2,200	129 lm/W					
		5000K	2,200	129 lm/W					
		6500K	2,200	129 lm/W					

KT-LEDXXPLL-XXGC-8CSJ-D

4-PIN LED PLL TUBE

PHYSICAL SPECIFICATIONS

WATTAGE	LENGTH (X)
8.5W	8.58"
10W	12.32"
16W	16.06"
17W	21.96"

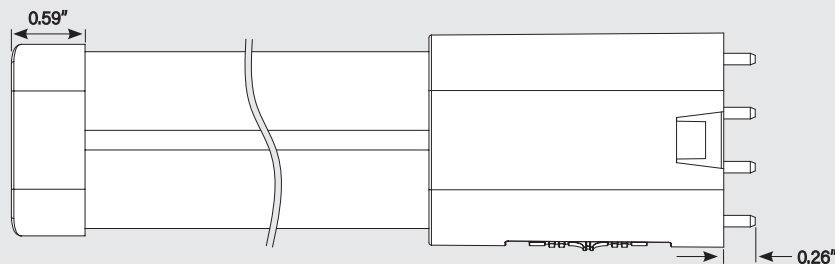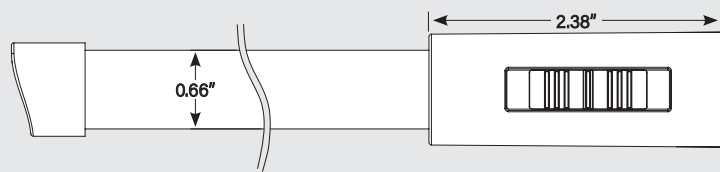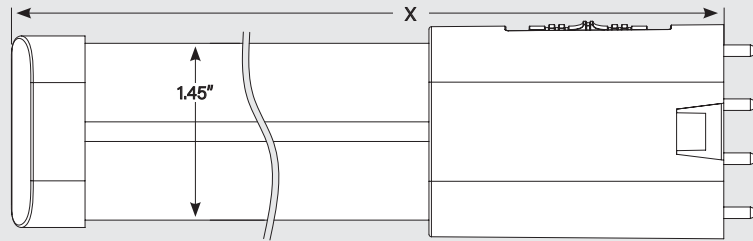

COLOR SELECT (CCT) ADJUSTMENT


This fixture is equipped with field-adjustable Keystone Power Select and Color Select technology.

1. Ensure power is off to the fixture
2. Locate the switch on the underside of the fixture
3. Adjust switch to desired CCT
4. Restore power



COLOR SELECT ADJUSTMENT SWITCH

Set switch to adjust CCT between 3000K, 3500K, 4000K, 5000K, and 6500K. Fixture comes preset at 4000K.

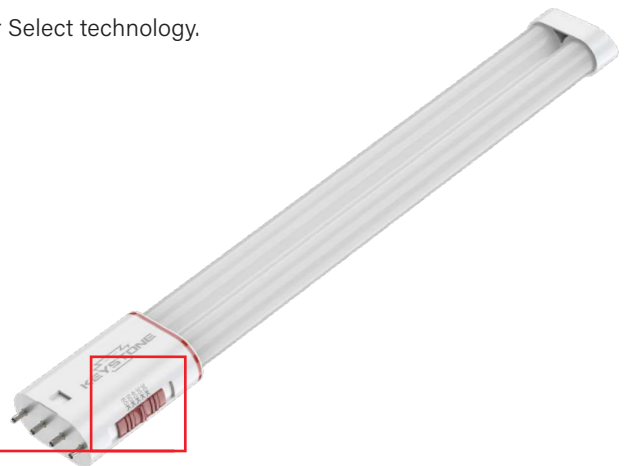


KT-LEDXXPLL-XXGC-8CSJ-D

4-PIN LED PLL TUBE


WIRING DIAGRAMS

BYPASS MAGNETIC BALLAST WITH 1 LAMP

BEFORE

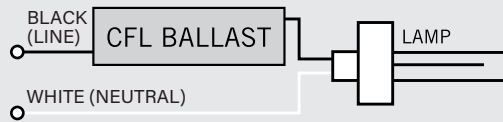


AFTER




BYPASS ELECTRONIC BALLAST WITH 1 LAMP

BEFORE

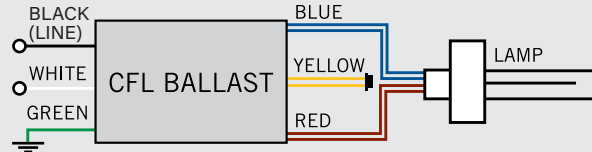


AFTER




BYPASS MAGNETIC BALLAST WITH 2 LAMPS

BEFORE

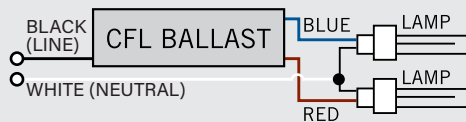


AFTER

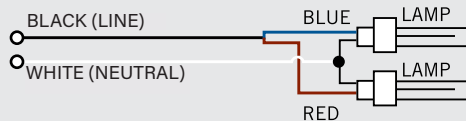


BYPASS ELECTRONIC BALLAST WITH 2 LAMPS

BEFORE

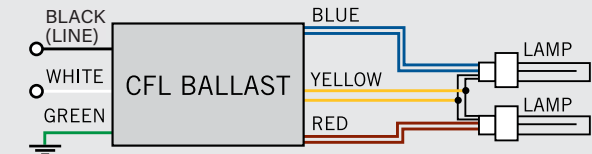

AFTER

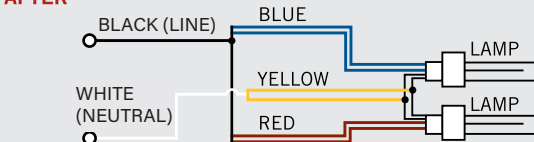

ORDERING INFORMATION

ORDER CODE	UPC	EASY CODE	DLC PRODUCT ID
KT-LED8PLL-9GC-8CSJ-D	843654167220	RTX-27	N/A
KT-LED10PLL-12GC-8CSJ-D	843654167237	GHB-78	N/A
KT-LED16PLL-16GC-8CSJ-D	843654167244	XXH-24	N/A
KT-LED17PLL-22GC-8CSJ-D	843654167251	EZV-29	S-LYN6GS

CATALOG NUMBER BREAKDOWN

KT-LEDXXPLL-XXGC-8CSJ-D

1 2 3 4 5 6 7 8 9 10

- 1** Keystone Technologies
2 LED Lamp
3 Wattage
4 Lamp Type
5 Size
6 Glass Coated
7 80 CRI
8 Color Selectable
9 Color Select Designation
10 Direct Drive

3 Wattage

8	8.5W
10	10W
16	16W
17	17W

5 Size

9	9"
12	12"
16	16"
22	22"

9 Color Select Designation

B	3000/3500/4000/5000/6500K
---	---------------------------