


XFit
**FULL CUT OFF
WALL PACK FIXTURES**

KT-WPLED60-M2-8XX-VDIM

ARCHITECTURAL 60W FULL-CUTOFF LED WALL PACK

DESCRIPTION

Architectural 60W Full-Cutoff LED Wall Pack | 120–277V Input | 4000–5000K | Medium-Size Bronze Housing | Wide Optic Lens

APPLICATION

Building Mount for exterior illumination (perimeters, pathways, loading docks, and other general security lighting requirements)


**5 YEAR
WARRANTY**

PRODUCT FEATURES

- Architectural full-cutoff design improves the appearance of building exteriors and optimizes functional light distribution
- Heavy-duty, die-cast aluminum housing features modern aesthetics while retaining (5) available 1/2" threaded conduit hubs: (1) on back and (1) on all four sides
- Powered by Keystone 0–10V dimming LED drivers
- Dark Sky friendly performance, eliminates undesirable sky glow and glare
- Features one translucent 3/4" threaded plug with anti-yellowing agent for use with photocell accessory KT-WPLED-PS-UV-KO
- Precision-crafted optical lens provides wide distribution pattern ideal for increased fixture spacing and uniformity
- Covers footprint of mid-size HID wallpacks
- Ambient operating temperature: –40°C/–40°F to 50°C/122°F
- UL listed for wet locations, IP65
- 0–10V dimming, 10% min
- Power Factor: >0.95
- THD: <20%
- LED chip lifetime: L70 >100,000 hrs @ 25°C/77°F ambient fixture temp
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions
- Fixture impact rating IK08
- Compatible with Keystone LED Emergency Backups

ELECTRICAL SPECIFICATIONS


Catalog Number	Wattage	Lumens	Lumens Below 90°	Dimming	CCT	Efficacy	CRI	Housing Color	Input Voltage	Rated Life	Legacy Equivalent
KT-WPLED60-M2-840-VDIM	60W	7500 lm	7445	0–10V	4000K	125 lm/W	>80	Bronze	120–277V	50,000 hrs	250W MH
KT-WPLED60-M2-850-VDIM		7800 lm	7745		5000K	130 lm/W					

KT-WPLED60-M2-8XX-VDIM


ARCHITECTURAL 60W FULL-CUTOFF LED WALL PACK

PHOTOMETRIC SPECIFICATIONS

ISOCANDELA PLOT

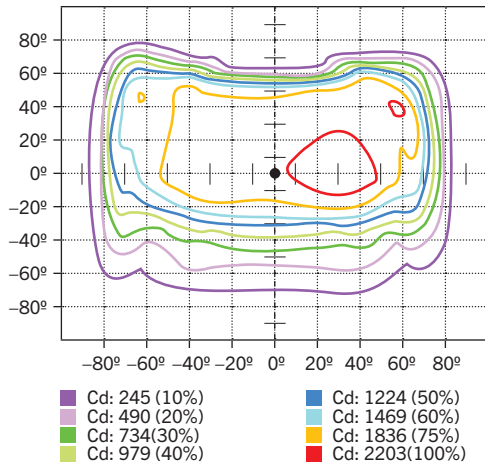

LUMINOUS INTENSITY DISTRIBUTION

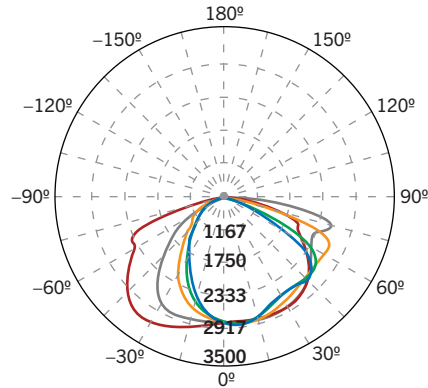

Average diffuse angle (50%): **114.2°**


- 1 Blue – 0° H
- 2 Red – 90° H
- 3 Green – 22.5° H
- 4 Orange – 45° H
- 5 Grey – 67.5° H

FLUX DISTRIBUTION

Zone	Lumens	% Luminaire
Forward Light	4,722 lm	65.0%
0°–30°	907 lm	12.5%
30°–60°	2,329 lm	32.0%
60°–80°	1,327 lm	18.3%
80°–90°	159 lm	2.2%
Back Light	2,520 lm	34.6%
0°–30°	772 lm	10.6%
30°–60°	1,249 lm	17.2%
60°–80°	454 lm	6.2%
80°–90°	45 lm	0.6%
Up Light	25 lm	0.4%
90°–100°	4 lm	0.1%
100°–180°	21 lm	0.3%


MOUNTING

Side view



LIGHT DISTRIBUTION PATTERN


Isometric view from above; Luminaire mounted at 15'

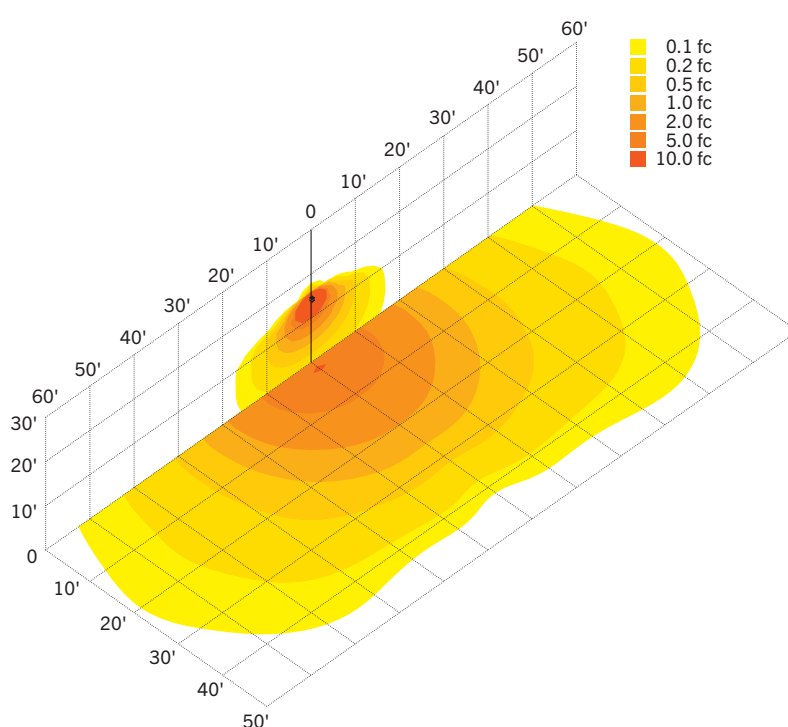

KT-WPLED60-M2-8XX-VDIM


ARCHITECTURAL 60W FULL-CUTOFF LED WALL PACK

PHYSICAL SPECIFICATIONS

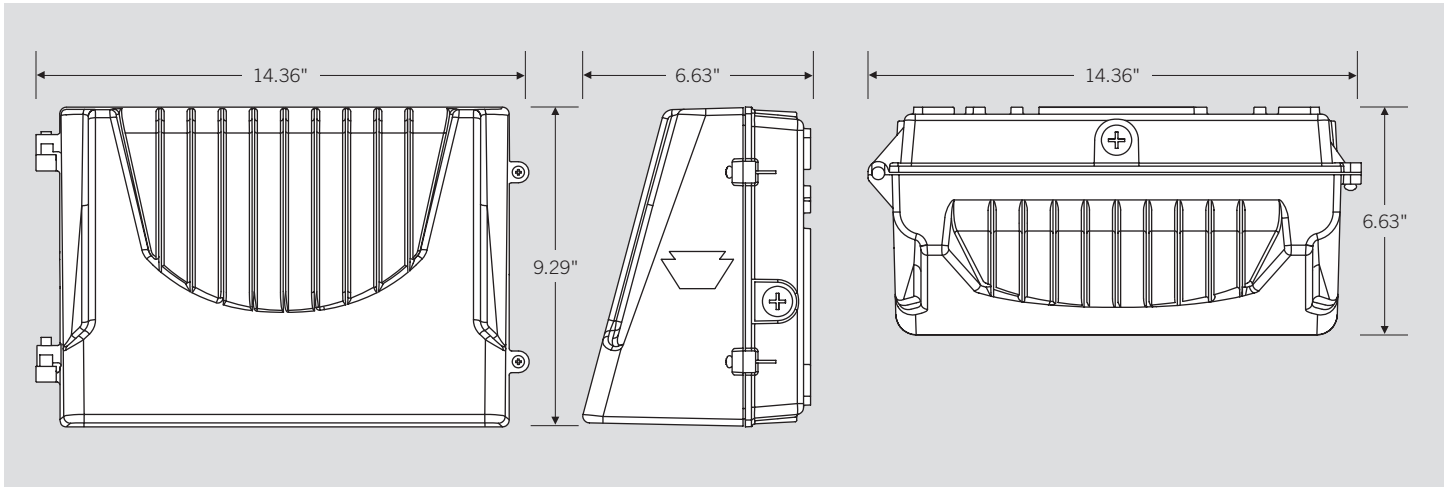

GENERAL SETUP INSTRUCTIONS

GENERAL WIRING DIAGRAM

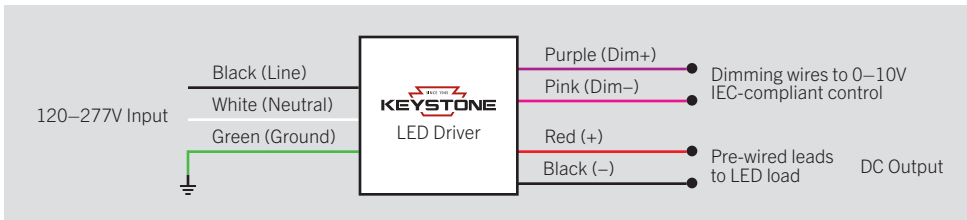

Caution: Before installing, make certain that AC power to the fixture is off.

Caution: The electrical rating of this product is 120–277V. Installer must confirm that there is 120–277V at the fixture before installation.

ACCESSORIES (SOLD SEPARATELY)

Catalog Number	Description
KTSP-10KV-C	Wallpack 10kV Surge Protector, Compact Design
KT-WPLED-PS-UV-KO	Keystone Wall Pack Button Photocell



XFit | FULL CUT OFF WALL PACK FIXTURES

KT-WPLED60-M2-8XX-VDIM

ARCHITECTURAL 60W FULL-CUTOFF LED WALL PACK

ORDERING INFORMATION

CATALOG NUMBER	PACK QTY.	EASY CODE	UPC
KT-WPLED60-M2-840-VDIM	1	VMR-18	843654129075
KT-WPLED60-M2-850-VDIM	1	OYW-93	843654129082

CATALOG NUMBER BREAKDOWN

KT-WPLED60-M2-8XX-VDIM

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

- 1 Keystone Technologies
- 2 Fixture Type
- 3 LED Lamp
- 4 Max Wattage
- 5 Size
- 6 Style
- 7 CRI
- 8 Color
- 9 Dimming
- 10 Additional Options

2 Fixture Type

WP	Wallpack
----	----------

5 Size

M	Medium
---	--------

6 Style

2	Full-Cutoff
---	-------------

7 CRI

8	>80
---	-----

8 Color

40	4000K
50	5000K

9 Dimming

VDIM	0–10V
------	-------

10 Additional Options

	No option
/MW	Microwave occupancy Sensor Installed
/EMRG-12	12W Emergency Battery Backup Installed