

# WFA - LED Wallpack, Flood Arch



WFAL  
(Large)

WFAM  
(Medium)

project name	type
catalog number	
comments	voltage
approved by	date

22/  
40/87  
watts

1910/  
3158/7152  
lumens

convertible  
to flood

two  
housing  
sizes

## features

- Highly adaptable mounting options provides ultimate versatility
- Can mount to wall, inverted, flood, bollard, or low-level lighting
- Contemporary smooth vertical body architectural styling
- Progressive two piece aluminum diecast construction
- Offered in medium and large housing configurations
- Full cutoff – Night Sky Friendly
- UV stabilized TGIC carbon bronze powder coat finish
- High-impact resistant tempered glass lens
- Stainless steel hardware
- 5 year limited warranty

## performance

- Latest generation of LED chips delivers similar light output as 70-400W HID while using only 1/3 the energy
- LED mirrored reflector provides forward throw optical performance
- +70 CRI
- Universal 120~277V, 60 Hz
- Ambient temperature range: -40°F to 104°F (-40°C to 40°C)
- UL & CUL listed for wet locations
- WFAM– 22W=1910lm  
40W=3158lm
- WFAL– 87W=7152lm

## applications

- Architectural building façade/canopy
- Entryways
- Loading Docks
- Pathway / stairways
- Industrial parks
- Multi-use facilities
- Perimeter parking areas
- Storage Areas
- Schools
- Apartment complexes

## ordering information

Order Code	Item #	Description	Configuration	Finish	V	HID Equivalent
<b>08597</b> <b>08598</b>	✓ <b>WFAM-1C-U</b> ✓ <b>WFAM-2C-U</b>	<b>WFAM</b> - Wall/Flood Arch - Medium	<b>1C</b> - 5000K (22W / 1910LM) <b>2C</b> - 5000K (40W / 3158LM)	(Omit) Bronze <i>Standard</i> (For custom color see adder)	<b>U</b> - 120-277V	70-150W 175-250W
<b>08599</b>	✓ <b>WFAL-3C-U</b>	<b>WFAL</b> - Wall/Flood Arch - Large	<b>3C</b> - 5000K (87W / 7152LM)			400W


✓ DesignLights Consortium™ Qualified

### adder - WFA Medium (sold separately)

Order Code	Item #	Description
<b>08738</b>	PCB1	Photocontrol, Button Type 120V
<b>08739</b>	PCB2	Photocontrol, Button Type 277V
<b>08703</b>	WFAM-SF	Slipfitter 2-3/8" and Junction Box
<b>08704</b>	WFAM-KN	Knuckle 1/2" and Junction Box
<b>08705</b>	WFAM-UT	U Bracket Trunnion and Junction Box
<b>08867</b>	LP1020-36-C0480	Replacement Driver for WFAM-1C-U
<b>08863</b>	LP1040-36-C0950	Replacement Driver for WFAM-2C-U


### adder - WFA Large (sold separately)

Order Code	Item #	Description
<b>08738</b>	PCB1	Photocontrol, Button Type 120V
<b>08739</b>	PCB2	Photocontrol, Button Type 277V
<b>08706</b>	WFAL-SF	Slipfitter 2-3/8" and Junction Box
<b>08707</b>	WFAL-UT	U Bracket Trunnion and Junction Box



**WFA** - LED Wallpack, Flood Arch

dimensions

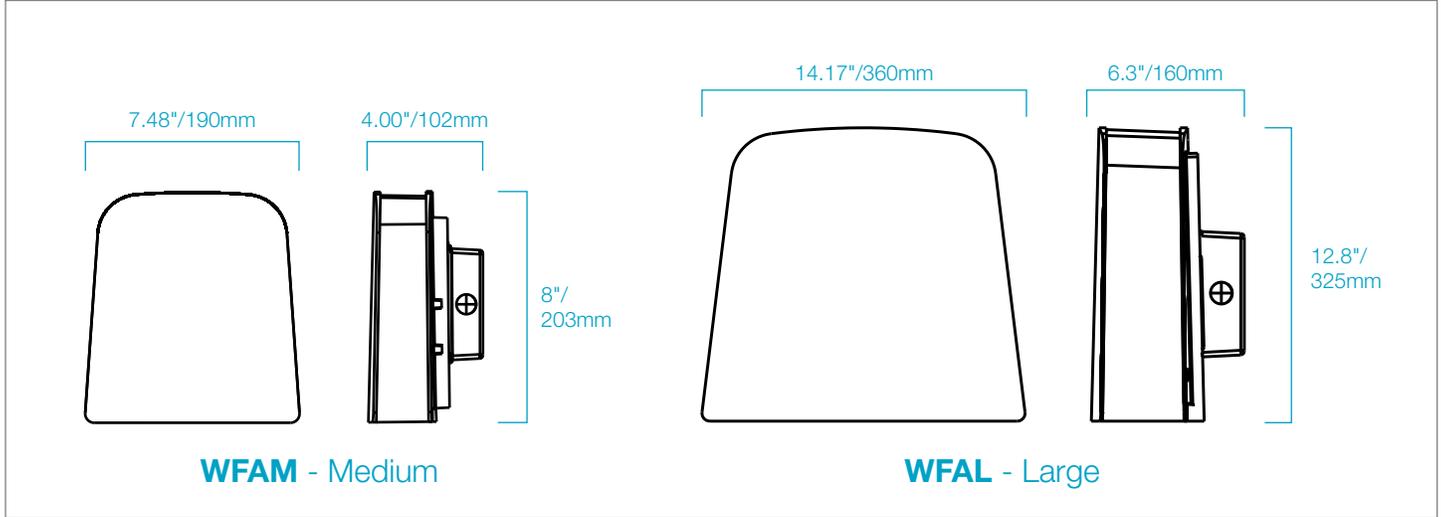

available accessories (sold separately)



watch > like > follow

