



EXTERNAL DRIVE LED

TYPE C LED TUBES

KTLD-2LT8-UV-10C-VDIM /G2

CONSTANT CURRENT LED DRIVER FOR TYPE C T5HE LAMPS

DESCRIPTION

Constant Current Output | 120-277V Input | 0-10V Dimming



DRIVER TYPE: Constant Current

MAX. OUTPUT POWER: 24.3W

INPUT VOLTAGE: 120-277Vac $\pm 10\%$

OUTPUT VOLTAGE: 36~45 Vdc

OUTPUT CURRENT: 260mA x 2 channels

WARRANTY: 7 Years



PRODUCT FEATURES


- Compatible with Keystone External Drive T8 LED Lamps
- Meets FCC Part 15 (Class B) consumer limits
- Short circuit overload and open load protection
- Type 1 outdoor, suitable for dry and damp locations
- UL8750 recognized component
- Dimmable with 0–10V dimmer, minimum dim 10%
- Operating temperature: -20°C/-4°F to 45°C/113°F
- 85°C/185°F maximum case temperature
- Input frequency: 50/60 Hz
- THD: < 20%
- 70,000 hour lifetime

ELECTRICAL SPECIFICATIONS

INPUT CHARACTERISTICS				OUTPUT CHARACTERISTICS			FEATURES
Input Voltage	Input Power	Power Factor	Max. Current	Max. Output Power	Rated Output Current	Output Voltage	Efficiency
120-277Vac	28.8W	>0.9	0.24A @ 120V	24.3W	260mA x 2 Channels	36-45Vdc	88%

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

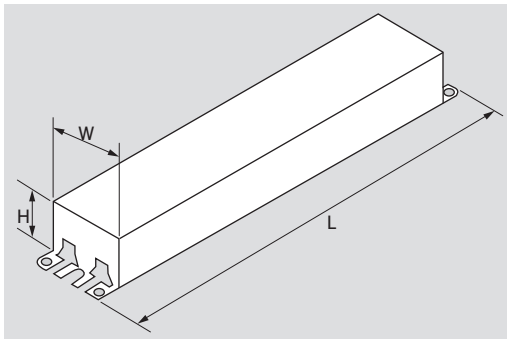

LENGTH (L)	9.50"
WIDTH (W)	1.33"
HEIGHT (H)	1.10"

*TC Point (85°C) is noted on each driver label




EXTERNAL DRIVE LED

TYPE C LED TUBES

KTLD-2LT8-UV-10C-VDIM /G2

CONSTANT CURRENT LED DRIVER FOR TYPE C T5HE LAMPS

WIRING

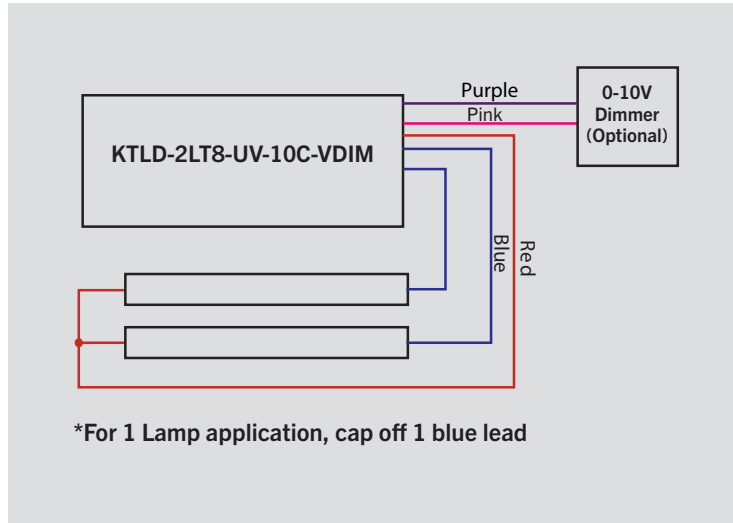

STANDARD LEAD LENGTHS*

Input	Black	30.00"
	White	30.00"
Output	Red	30.00"
	Blue	30.00"
Dimming	Purple	30.00"
	Pink	30.00"

Lead wires are 18 AWG 105° C/600V.

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	UPC	EASY CODE
KTLD-2LT8-UV-10C-VDIM-CP /G2	Carton Pack	843654141053	DLF-77

CATALOG NUMBER BREAKDOWN

KTLD-2LT8-UV-10C-VDIM-CP /G2

1

2

3

4

5

6

7

8

- 1 Keystone Technologies LED Driver
- 2 # of Lamps
- 3 Lamp Type
- 4 120-277V Input
- 5 Lamp Wattage
- 6 0-10V Dimming
- 7 Packaging Style
- 8 Generation 2