

KTLD-4LT8-UV-10C-VDIM

CONSTANT CURRENT LED DRIVER FOR TYPE C T8 LAMPS

DESCRIPTION

Constant Current Output | 120–277V Input | 0–10V Dimming



DRIVER TYPE: Constant Current

MAX. OUTPUT POWER: 48.6W

INPUT VOLTAGE: 120–277Vac $\pm$ 10%

OUTPUT VOLTAGE: 36–45 Vdc

OUTPUT CURRENT: 260mA $\times$ 4 channels

WARRANTY: 5 Years



PRODUCT FEATURES


- Compatible with Keystone external drive T8 LED lamps
- Meets FCC Part 15 (Class B) consumer limits
- Short circuit overload and open load protection
- Type 1 outdoor, suitable for dry and damp locations
- UL8750 Recognized component
- Dimmable with 0–10V dimmer, dim maximum 10%
- Operating temperature: $-20^{\circ}\text{C}/-4^{\circ}\text{F}$ to $45^{\circ}\text{C}/113^{\circ}\text{F}$
- $85^{\circ}\text{C}/185^{\circ}\text{F}$ maximum case temperature
- Input frequency: 50/60 Hz
- THD: < 20%

ELECTRICAL SPECIFICATIONS

INPUT CHARACTERISTICS				OUTPUT CHARACTERISTICS			FEATURES
Input Voltage	Input Power	Power Factor	Max. Current	Max. Output Power	Rated Output Current	Output Voltage	Efficiency
120–277Vac	57.6W	>0.9	0.48A @ 120V	48.6W	260mA $\times$ 4 Channels	36–45Vdc	88%

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

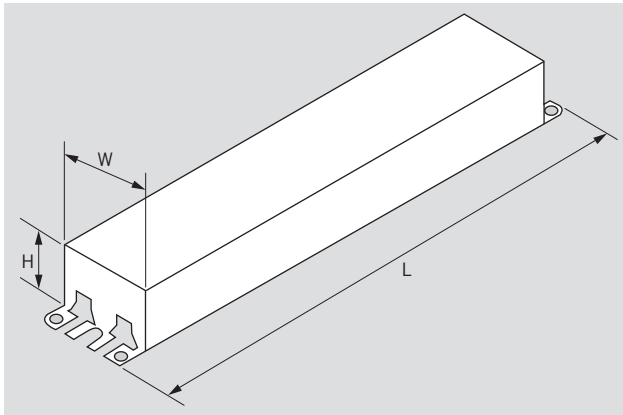


LENGTH (L)	9.50"
WIDTH (W)	1.80"
HEIGHT (H)	1.30"

*TC Point (85°C) is noted on each driver label

KTLD-4LT8-UV-10C-VDIM

CONSTANT CURRENT LED DRIVER FOR TYPE C T8 LAMPS

WIRING

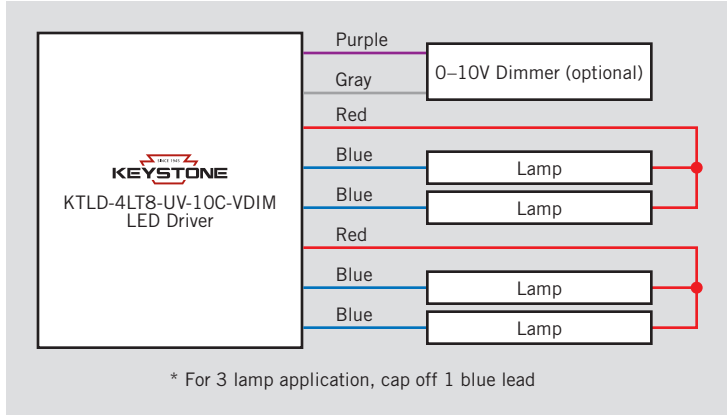

STANDARD LEAD LENGTHS*

Input	Black	30.00"
	White	30.00"
Output	Red	30.00"
	Blue	30.00"
Dimming	Purple	30.00"
	Gray	30.00"

Lead wires are 18 AWG 105° C/600V.

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

Order Code	Pack Quantity	Item Status
KTLD-4LT8-UV-10C-VDIM-CP	25	Active

CATALOG NUMBER BREAKDOWN

KTLD-4LT8-UV-10C-VDIM

1

2

3

4

5

6

- 1 Keystone Technologies LED Driver
- 2 Number of Lamps
- 3 Lamp Type
- 4 120-277V Input
- 5 Lamp Wattage
- 6 0-10V Dimming