



Components Installation


- 1 Ensure that the power to the unit is turned off. Use proper lockout and tagout procedures.

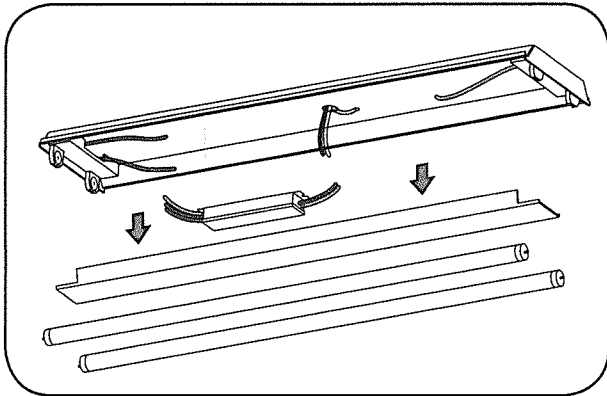


- 2 Remove existing lamps, fixture coverplate, and ballast. Leave wiring in place and make sure wire length is long enough to attach to the new LED driver. Verify that the AC supply line is provided with a ground wire connected to the luminaire.

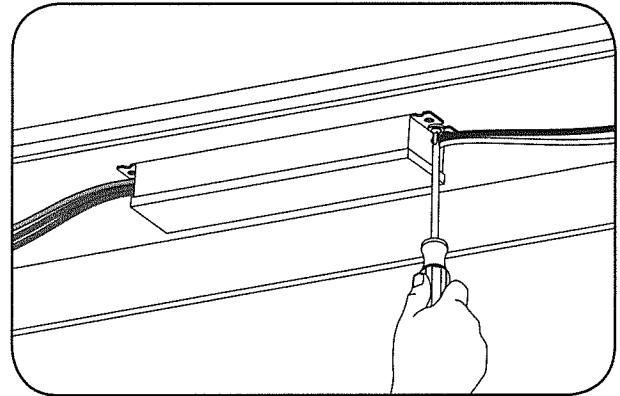


- 3 Secure the GE driver to fixture by using existing ballast mounting holes and screws. Use self-tapping screws (not provided) to create new mounting holes if necessary.

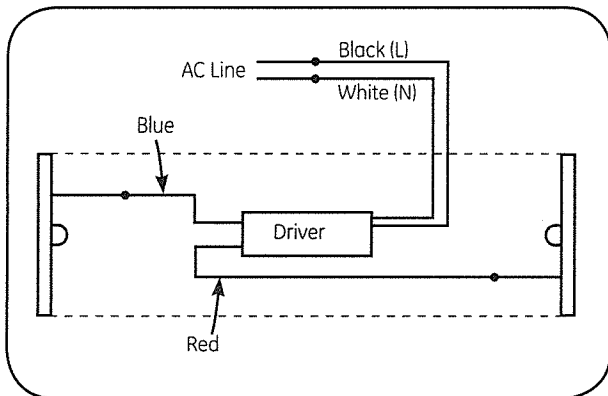


- 4A **One Tube Fixture:** Connect the black (L) and white (N) wires of driver to black and white wires of AC line, respectively. Connect the blue wire of the driver to the lamp holder at one end. Connect the red wire of the driver to the lamp holder at the opposite end.

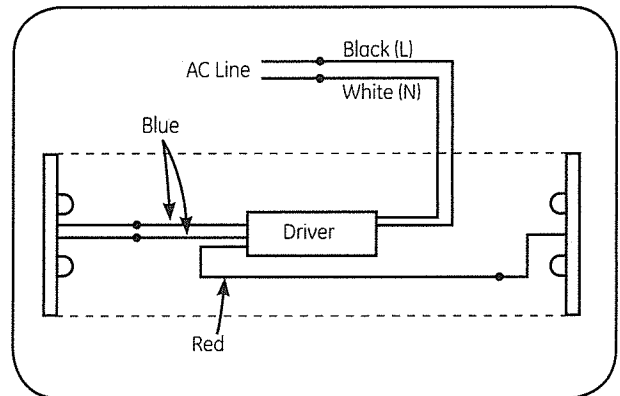


- 4B **Two Tube Fixture:** Connect the black (L) and white (N) wires of driver to black and white wires of AC line, respectively. Connect blue wires of the driver to the lamp holders at one end. Connect the red wire to the lamp holder at the opposite end.

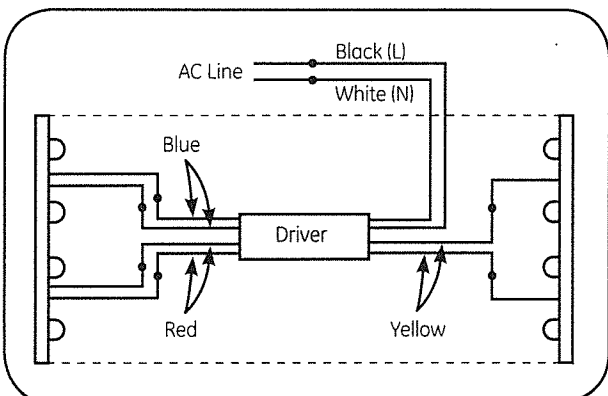


- 4C **Four Tube Fixture:** Connect the black (L) and white (N) wires of driver to black and white wires of AC line, respectively. Connect blue wires of the driver to the lamp holders at one end. Connect the red set of wires to the other set of lamp holders. At the opposite end, connect the yellow wires to the

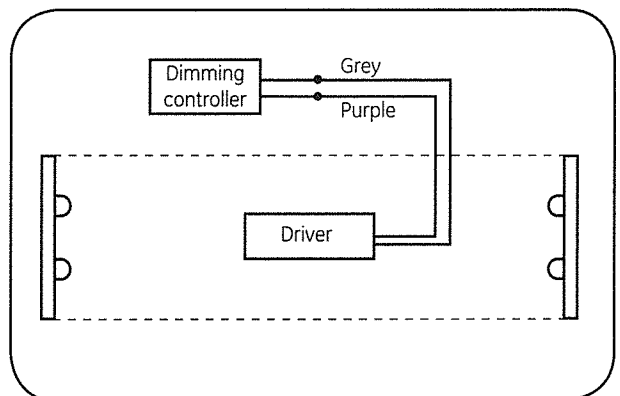


- 5 **Dimming option:** Connect the grey and purple wires from the driver to the dimming controller.
NOTE: Other wires not shown for clarity.

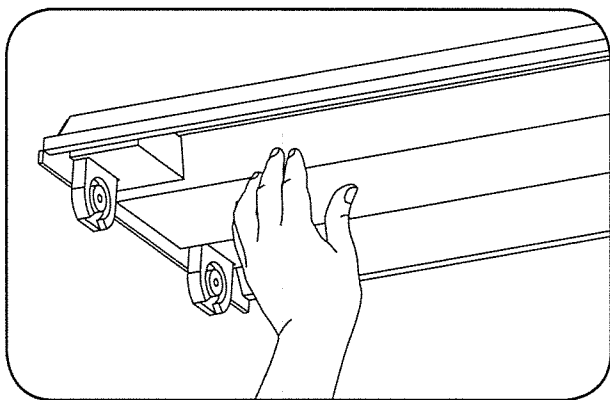


6A Compactez les fils, et remettez en place la plaque de finition de l'appareil.

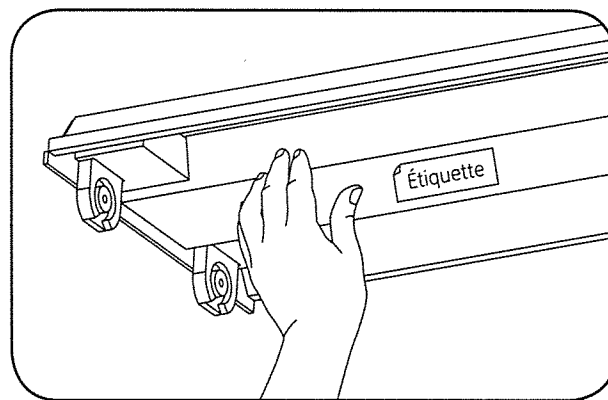

6B Apposez l'étiquette sur l'appareil, à un endroit où elle sera facilement visible.

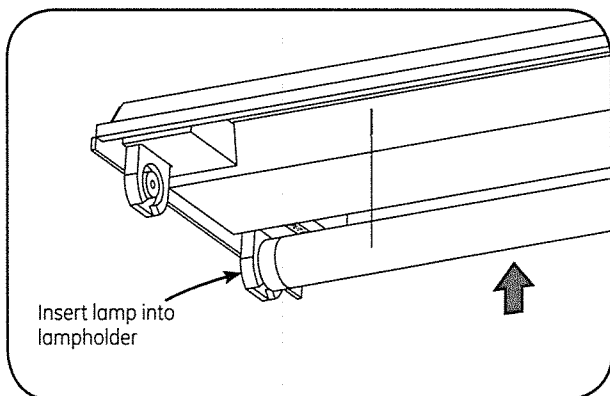

7 Insérez le tube à DEL Energy Smart^{MD} dans la douille de l'appareil, et faites-le pivoter sur 90 degrés. Répétez la procédure pour les autres tubes.

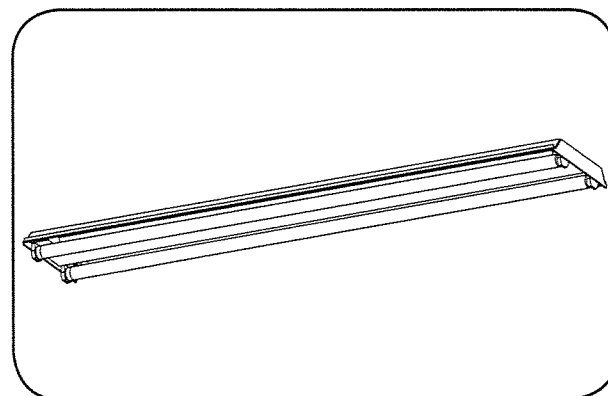

8 Restaurez l'alimentation et assurez-vous que les lampes fonctionnent correctement

Entretien/remplacement des lampes

Communiquez avec un électricien professionnel pour le service d'entretien de cet appareil. Commandez toute pièce de rechange individuellement en utilisant exactement le même numéro de modèle. Communiquez avec le fabricant pour toute question ou préoccupation.