


- Replaces HID, Metal Halide or high pressure sodium floods
- Integral Cooling Fin releases heat efficiently to maintain the Life of LED's & LED Driver
- Corrosion resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Superior Architectural Powder Coat Finish
- Stainless steel hardware
- 0-10V Dimmable
- Operating Temperature: -40°F to 104°F
- 50,000+ Hour life expectancy
- IP65 rated
- Listings: cETLus
- DLC PRODUCT ID#: PLKHPM9Z9NHE
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/ Watt	DLC PRODUCT ID #
71149B	Bronze	150W	20,850	5000K	277-480V	Wide Beam	139lm/w	PLKHPM9Z9NHE



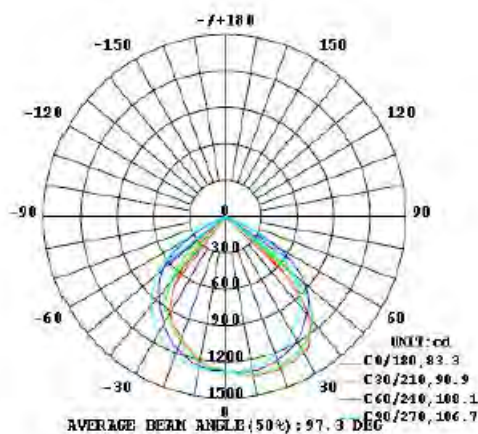

# 71149B - ARCHITECTURAL FLOOD LIGHT

150W 277-480V 5000K BRONZE

## Technical Specifications:

### **Electrical:**

Input Voltage: 277-480V

Current: 0.31A @ 347V

Frequency: 60Hz

Power Factor:  $\geq 0.9$

THD: 15% @ 347V

### **Product Parameters:**

150 Watts

Efficacy: 139 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

### **Chromaticity Measurements:**

Beam Angle: 97.3°

CRI: 70

R9: -30

DUV: 0.0023

Chromaticity (x,y):  $x=0.3455$ ;  $y=0.3564$

Chromaticity (u,v):  $u=0.2096$ ;  $v=0.4874$

### **Component Specifications:**

LED: SMD2835

Driver: 277-480V

Frequency: 50-60HZ

### **Dimming:** 0-10V

### **Operating Temperature:**

Minimum Starting: -40°F to 104°F

### **Construction:**

Housing: Corrosion resistant Die Cast Aluminum Housing

IP Rating: IP65 Wet Location

Lens Material: Polycarbonate

Mounting: 2-3/8" Slipfitter

Listings:

cETLus,

DLC PRODUCT ID#: PLKHPM9Z9NHE

Accessories Available (Sold Separately):

75351B - Visor

71360B - Trunnion Mount

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).