


High Performance LED Lotus Lamp, 80W

Designed for Easy Installation in New Fixtures, Existing Luminaires or as a Standalone Fixture, the HyLite LED Lotus Lamp is Suitable for a Wide Variety of Applications. It is available in Multiple Beam Angles for Greater Light Control & Ideal Light Distribution. It Enhances Vision for Better Optical Acuity, reduces Light Pollution, and provides Clean, Crisp Light. The HyLite LED Lotus Lamp offers an Unprecedented Level of Light Output, Efficiency and Energy Savings that is Unmatched in the Industry today.

Suitable for Fully Enclosed Fixtures, its Compact Size makes it an Ideal Retrofit for CFL, MV, HID & HPS Lamps in existing E39/E40 (Mogul) Base Fixtures. With Lamp Life of up to 60,000 hours, the HyLite LED Lotus Lamp Significantly Reduce Energy Consumption and Relamping Costs, consequently decreasing Maintenance and Disposal Costs.

- Versatile - the HyLite LED Lotus Lamp can be used with Direct Wire Connection for, Temporary or Portable Lighting. The Connectors are Water-proof.
- Extremely Efficient: High Lumen Efficacy: 140 LpW
- Multiple Beam Angles for Greater Light Control: 15°, 25°, 40°, & 120° Solutions from Narrow Spots to Wide Floods. Dimmable Models Available.
- Fully Encapsulated: Shatter-proof, High-Shock & High-Vibration Resistant
- High >80 CRI. Crisp Light for Greater Visibility and Safety.
- Easy Installation: No Ballast necessary. Use as a Fixture or as a Direct Retrofit into an existing Socket. Instant Start and Restart: No Warm-up Time required.
- Heat & Impact Resistant, UV Protected, Non-yellowing, Optical Grade Lens
- Cool Operation: Does not add to Heat Load while producing Brilliant Light
- Safe and Reliable: Isolated Circuit Design. Integral 1 kV Surge Suppressor and Protection. Includes a Free 20kA in-line SPD for added Protection.
- Excellent Thermal Management with Proprietary-designed Heat Sink
- No Electro-Magnetic (EMi) or Radio Frequency Interference (RFI)
- Ingress Protection: IP65. Complete protection against Contact, Dust Infiltration and Water Splashes
- Safe: Contain No Hazardous Materials; RoHS Compliant: No Lead, Mercury, Toxic Metals or Arsenic Gases. No Disposal Requirements. Facilitates LEED® points.
- Environmentally Friendly: 98% of the HyLite LED Lamp is Recyclable

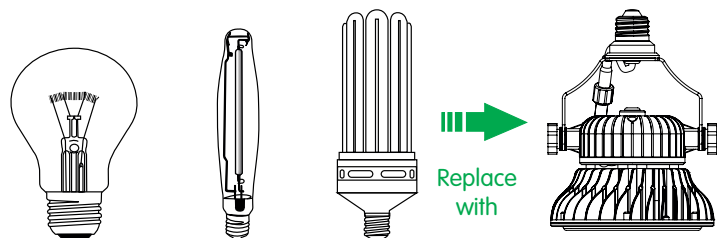

Incandescent	HPS/HID	CFL	HyLife
800W	320W	225W	80W
90%	75%	64%	Energy Savings (%)*

* Does not include Ballast Loss, Maintenance and Replacement Lamp Savings and Disposal Costs which can amount to additional Savings of 30~50%!



Dimmable
Model
Available

FREE!
20 kA


**In-line Surge Protection
Device Included.
Additional Protection
for your HyLite
Lotus Lamp
at no Cost!**




Proprietary




Versatile and Adjustable - Use in Multiple Positions, Different Lengths and Various Angles for Directional Lighting



Even & Uniform



For Enclosed
Luminaires



Up to
60,000 Hours



Reduction of
up to 90%



Vibration and Shock Resistant




Zero Interference



Radiation-Free
No Humming



140 LpW
LM-79 Tested



LM-80 Tested
ISTMT Tested



Safe and
Reliable

Model No.	Watts	Delivered Lumens	Maximum Install Height	Input Line Current	Base Type	Dimensions & Weight (each)		
						Diameter	Height	Weight
HL-LS-80W-E39-*. **	80	11,236	<32 ft. (10m)	300~652mA	E39/EX39 (Mogul)	8" (200mm)	7.66" (193mm)	2.2 lb. (1kg)

Legend: WD = Dimmable Model

Standard Beam Angle: 120°


Ordering Information: * -15 (for Spot Beam); -25 (for Narrow Flood Beam); -40 (for Flood Beam); -120 (for Wide Flood Beam)

** - 30K (for 3000°K); - 50K (for 5000°K)


- Minimum Lamp Compartment Dimensions for Enclosed Fixtures: 18" x 18" x 18.5" (463mm x 463mm x 470mm)
- To Prevent early Lamp Failure, Lamp should only be installed in Operating Environments ranging from a Minimum of -40°F (-40°C) to a Maximum of +131°F (+55°C)
- Efficacy: 140 LpW
 - CRI: >80
 - Standard Beam Angle: 120°
 - Max. THD (%): <20%
 - Universal Input Voltage
- Power Factor: >0.9
 - Protection: IP65
 - Rated Life: 50~60,000 Hrs.*
 - Warranty: 5 Years
 - 100~277V, AC 50/60 Hz.
- Ambient Working Temperature: -40°F~+131°F (-40°C~+55°C)
 - Dimmable Models Available
- 347V, 480V Available with External Step-Down Transformer only.
Please see HL-DT-125VA-480-277V Spec. Sheet at: <https://hyliteledlighting.com/resources/specification-sheets/>
- 3000°K and 5000°K Standard CCT. Products with 2400~6500°K (CCT) are available as "Special Orders" only and with Longer Lead Times
- * Depending upon the ambient temperature of the installation location

Multiple Beam Angles for Ideal Light Distribution


Suitable for
Damp Locations Enclosed Fixtures




15° - Spot



25° - Narrow Flood



40° - Flood

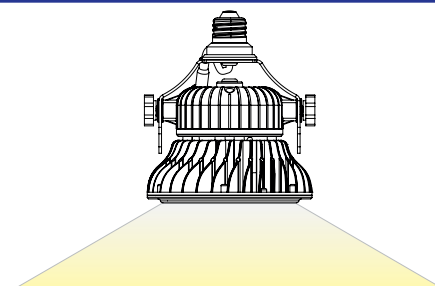

120° - Wide Flood

Ideal for High-Quality illumination in:

- High Ceilings
- Studio Lighting
- Track Lighting
- Stage Lighting
- Spot Lighting
- Down Lights
- Accent Lighting
- Flood Lighting
- Low & High Bay Lighting
- Canopy Lights
- Decorative Lighting
- Site Lighting
- Pendant Lights
- Freezer & Cold Storage Lights
- Barn Lights



NO
LEAD, MERCURY,
HEAVY METALS
OR TOXIC GASES




98%
RECYCLABLE




80W LED Lotus Lamp - Beam Angle, Average Illumination Charts


15°

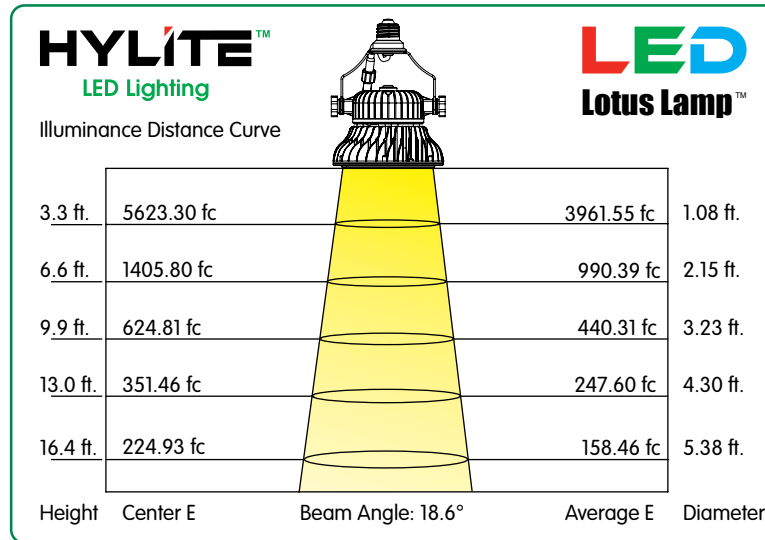


25°

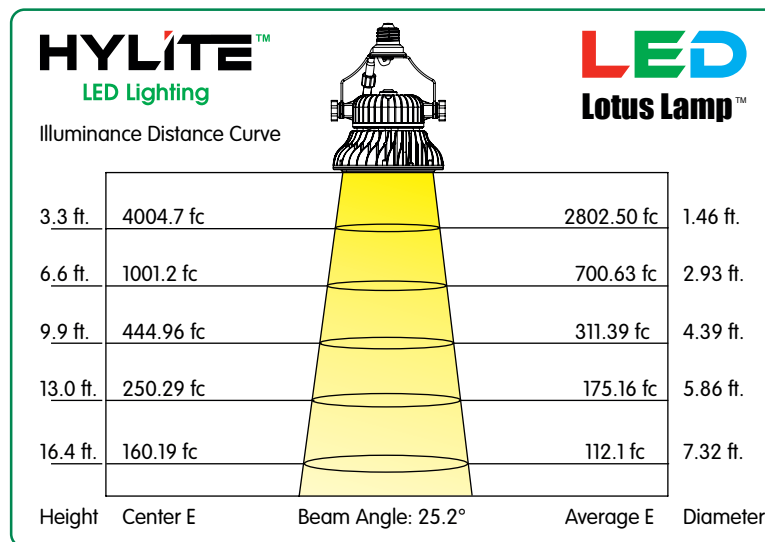

40°

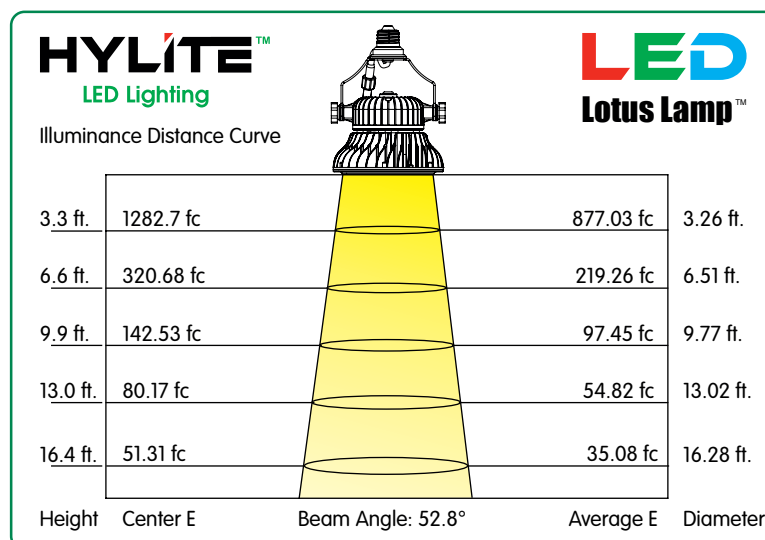

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance

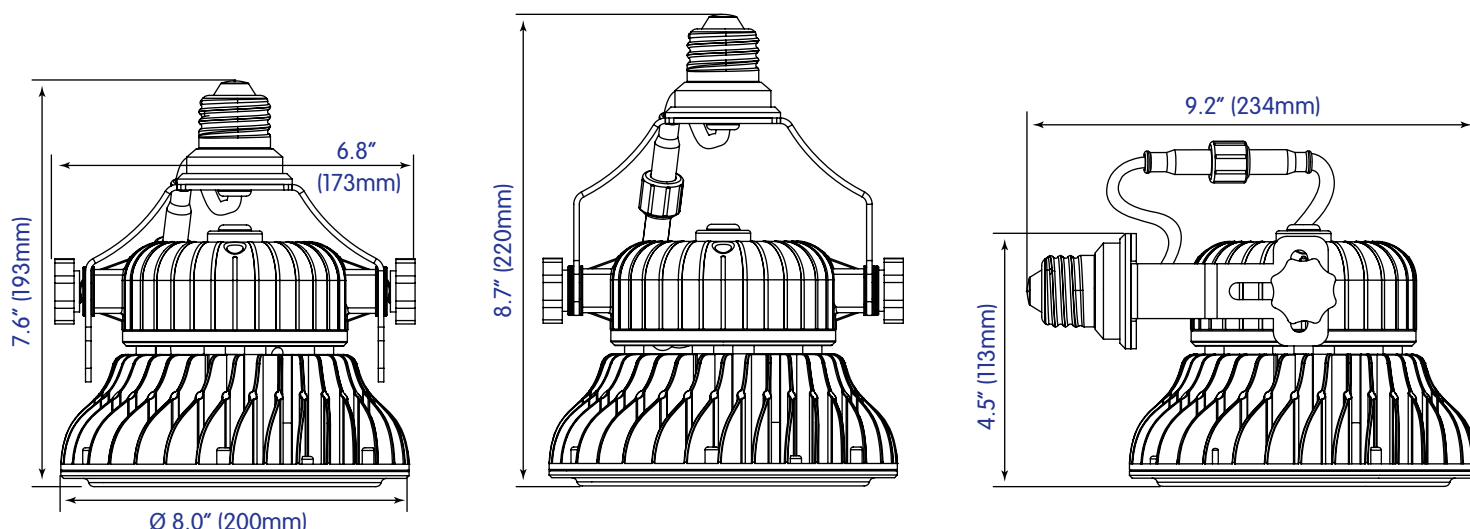


Accessories:



HL-QA-GX16D-LS
GX16D Adapter

HL-LS-WC2
2 Ft. (60cm)
Whip Connector



Installation: HyLite LED Non-Dimmable Lamps are designed to work off 100V to 277V, AC.

Note: The 80W Dimmable Lamp works off an External Dimmable Driver (100-277VAC) with 1-10V Dimming.

On either model - Dimmable or Non-Dimmable Lamp, Ballast (if equipped) must be Bypassed or Removed from the Fixture before installing the Lamp. Eliminating the Ballast saves Additional Costs related to Maintenance, Energy Consumption and Performance.

By-passing Ballast will also ensure that there is no EMI/RF interference. Failure to follow these instructions will result in a Damaged Product and will VOID Warranty. It could also result in an Electric Shock, or Fire.

WARNING!

Minimum Lamp Compartment Size
18" x 18" x 18.5"
(463mm x 463mm x 470mm)

Caution: The Lamp has been provided with a Safety Cable. It is Imperative to Secure Safety Cable to the Lamp and to a Permanent Secure Location for Safety.

Warning - Risk of Fire or Electric Shock

- Disable all Power to the Lamp before Inspection, Installation, or Removal. Failure to do so will create a Hazardous and Fatal Working Environment.
- Suitable for use in Dry, Damp and Wet Locations. Lamp must be installed in accordance with National, State, and/or Local Electrical Codes. Do Not Open – No User Serviceable Parts Inside.
- Operate in Fixtures that provide the Free Flow of Air around the Lamp. In Enclosed Fixtures, ensure the Lamp has enough Space for Heat Dissipation. This will ensure Lumen Maintenance and Extend its Working Life. Failure to Follow these Instructions will result in a Damaged Product and will VOID Warranty. When Products are used in Outdoor Fixtures, ensure the Space is Waterproof and Well-Ventilated.
- DO NOT Block Light emanating from Product in Whole or Part, as this may Cause an Unsafe Condition.
- Not intended for use in Emergency Exit Fixtures or Exit Lights.
- Caution: When Installing Lamps in Corrosive Environments, HyLite suggests that a High-Temperature, Moisture-Resistant, Silicone Grease or Sealant be used to protect the Metal-threaded base of the LED Lamp to prevent Water and/or Moisture Incursion that can lead to Premature Degradation of the Lamp Base and eventual Lamp failure. This is especially recommended for LED Lamp Installations near Saltwater Bodies.
- Installing Surge/Lightning Protectors is Highly Recommended and helps to Eliminate Premature Driver Failure caused by Surges and Power Fluctuations.