



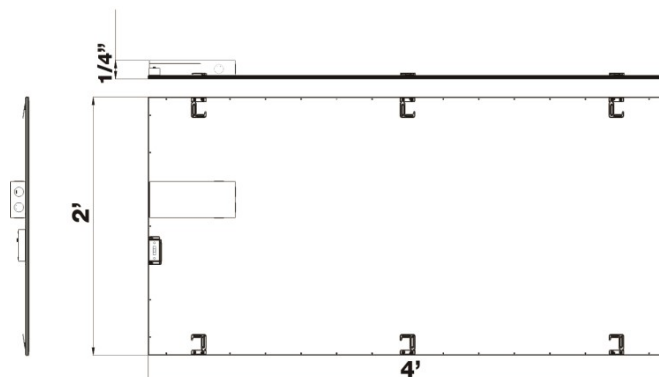

2x4

LED Color and Wattage Tunable Panel Light MORRIS# 71165B

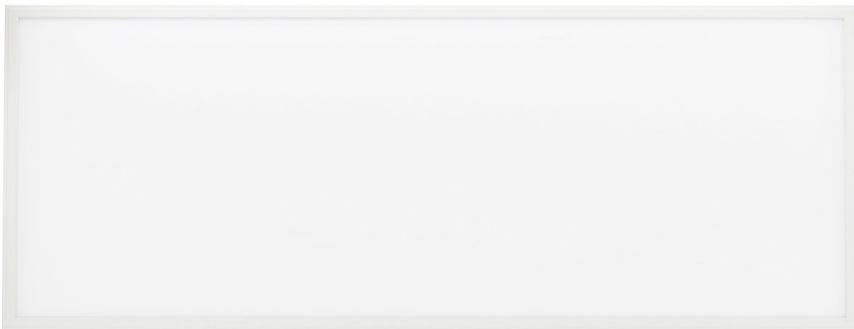


Features:

- Replacement for office, hallway, conference rooms etc.
- Color Tunable: 5000K, 4000K & 3000K
- Wattage Tunable: 30W, 35W, 40W, 45W, 50W
- Flicker Free Driver
- Dimmable
- SMD 2835 LEDs
- Operating Temperature: 14°F - 104°F
- PMMA Light Guide Panel IP20
- Dry Location Rated
- 5 Year Warranty

Part#	CCT	Lumens	Voltage	Light Pattern	Dimming	Lumens/Watt
71165B	5000	6,084	120-277V	110°	0-10/PWM	121
	4000	5,913				118
	3000	5,855				117

PHOTOMETRY

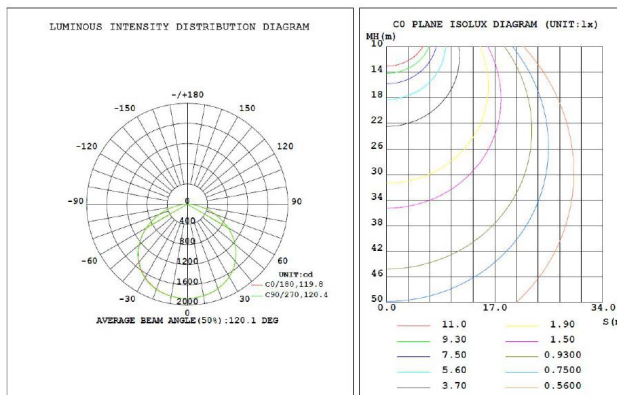

www.morrisproducts.com



2x4

LED Color and Wattage Tunable Panel Light

MORRIS# 71165B

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .413A @ 120V/40W/5K

.400A @ 120V/40W/4K

.425A @ 120V/40W/3K

Frequency: 60Hz

Power Factor: ≥0.9

THD: 8.8%

Product Parameters:

Wattage: 30W, 35W, 40W, 45W, 50W

Efficacy: 121 Lumens Per Watt 50,000

+ LED Life Span CCT Adjustable:

5000K (Cool White)

4000K (Neutral White)

3000K (Warm White)

Chromaticity Measurements:

Beam Angle: 110°

CRI: >80

R9: 17 @ 5000K

26 @ 4000K

19 @ 3000K

Component Specifications:

LED: SMD3030

Driver: 100-277V 50-60HZ

Driver Output Volts: 24-46VDC

Driver Output Amps: 1050mA

1KV Surge Protection

Dimming:

0-10V/PWM

Operating Temperature:

Minimum Starting 14°F - 104°F

Construction:

Housing: Aluminum

Powder Coated

IP Rating: IP20 Dry Location Rated

Lens Material: PMMA

Mounting: Ceiling

Listings: ETL

Carton Qty: 1

Weight: 1.87 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).