




71339B - ARCHITECTURAL FLOOD LIGHT

30W 120-277V 3000K BRONZE


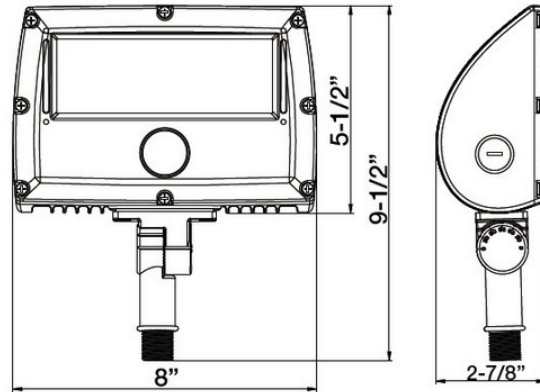


FEATURES:

- Replaces HID, Metal Halide or high pressure sodium floods
- Integral Cooling Fin releases heat efficiently to maintain the Life of LED's & LED Driver
- Corrosion resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Housing Color: Bronze
- Superior Architectural Powder Coat Finish
- Operating Temperature: -40°F to 104°F
- 50,000+ Hour life expectancy
- IP65 rated
- Listings: cETLus
- DLC PRODUCT ID#: PLEE9CPJDN9U
- Stainless steel hardware

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/ Watt	DLC PRODUCT ID #:
71339B	Bronze	30W	3,295	5000K	120/208/ 240/277V	Wide Beam	110lm/w	PLEE9CPJDN9U

PHOTOMETRY

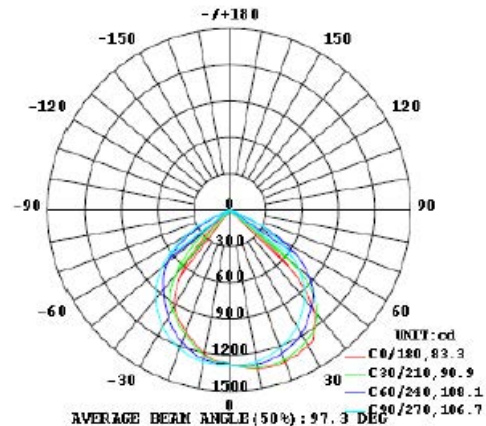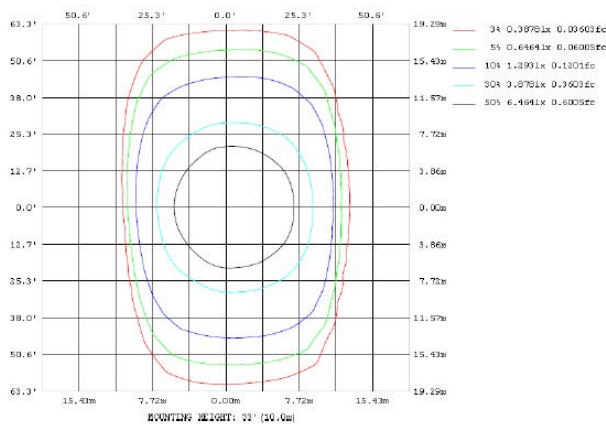



71339B - ARCHITECTURAL FLOOD LIGHT

30W 120-277V 3000K BRONZE

Technical Specifications:

Electrical:

Input Voltage: 120/208/240/277V

Current: .0.08A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 6% @ 120V

Product Parameters:

30 Watts

Efficacy: 110 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

Chromaticity Measurements:

Beam Angle: 97.3°

CRI: 70

R9: -22

DUV: 0.0023

Chromaticity (x,y): $x=0.3457$; $y=0.3567$

Chromaticity (u,v): $u=0.2098$; $v=0.4872$

Component Specifications:

LED: SMD2835

Driver: 120/208/240/277V

Frequency: 50-60HZ

Dimming: N/A

Operating Temperature:

Minimum Starting: -40°F to 104°F

Construction:

Housing: Corrosion resistant Die Cast Aluminum Housing

IP Rating: IP65 Wet Location

Lens Material: Polycarbonate

Mounting: 1/2" Adjustable Knuckle, Trunnion Mount (Sold Separately)

Listings:

cETLus

DLC PRODUCT ID#: PLEE9CPJDN9U

Accessories Available (Sold Separately):

71361B - Visor

71359B - Trunnion Mount

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).