




71454C - LED CLASSIC FULL CUTOFF MEDIUM WALL PACK


120-277V 5000K 75W



11-1/4"



13"




9-1/4"

FEATURES:

- Use in general lighting applications: Parking Lots & Building Security
- Lumiled LUXEON 3030 LEDs
- Die Cast Aluminum Housing
- Polyester Powder Coat Finish
- Housing Color: Bronze
- High Quality Tempered Glass Lens
- 4 Threaded K/Os -(1)Top, (1)Back, (2)Sides
- Photocontrol (not included) can be installed on fixture
- Stainless Steel Hardware
- Operation Temperature: -4°F to 104°F
- Voltage: 120/208/240/277V
- cETLus listed for Wet Locations

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Replaces Metal Halide	DLC PRODUCT ID#:
71454C	Bronze	75W	8840	5000K	120-277V	0-10V	250W	PL8Q8LUS4KSP

PHOTOMETRY:

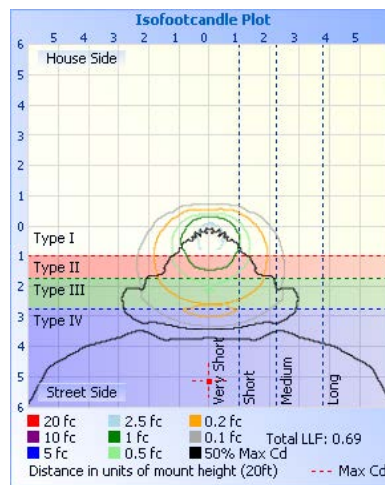



71454C - LED CLASSIC FULL CUTOFF

MEDIUM WALL PACK

120-277V 5000K 75W

Electrical:

Input Voltage: 120V-277V

Current: 0.70A@ 120V

Frequency: 50/60Hz

Power Factor: ≥ 0.90

THD: <20% @120V

Operating Temperature: -4°F - 131°F

Construction:

Housing: Die Cast Aluminum Alloy
Powder Coated Finish

Lens Material: Prismatic Borosilicate Glass Lens
UV Resistant Fire Resistant

Product Parameters:

Efficacy: 107 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

IP Rating: IP54 suitable for wet locations

Mounting: Wall Mount

Listings:

cETLus

DLC PRODUCT ID#: PL8Q8LUS4KSP

Chromacity Measurements:

Beam Angle: H 113° V114.5°BUG

Rating: B3-U3-G2 CRI: 72

R9: 0

Accessories:**Component Specifications:**

LED: Lumileds 3030

120V-277V

50-60HZ Driver Output Volts:

50-70V Driver Output Amps:

1200mA 4KV Surge Protection

Emergency Backup - CAT#: 71470B

LED Button Style Photocell - CAT#: 39100

LED Shutter Style Photocell - CAT#: 39102

LED Pencil Style Photocell - CAT#: 39104

Dimming: 0-10V

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).