



The installation must only be performed by a licensed electrician.


To prevent death, injury or damage to property, this product must be installed in accordance to National Electrical Code (NFPA70) in the US or Canadian Electrical Code (CSA 22.1) in Canada.

Disconnect power before installing the product or servicing it.

Wait until fixture has cooled down before installing or servicing the fixture.


MIN. 90°C SUPPLY CONDUCTORS

What's In The Box

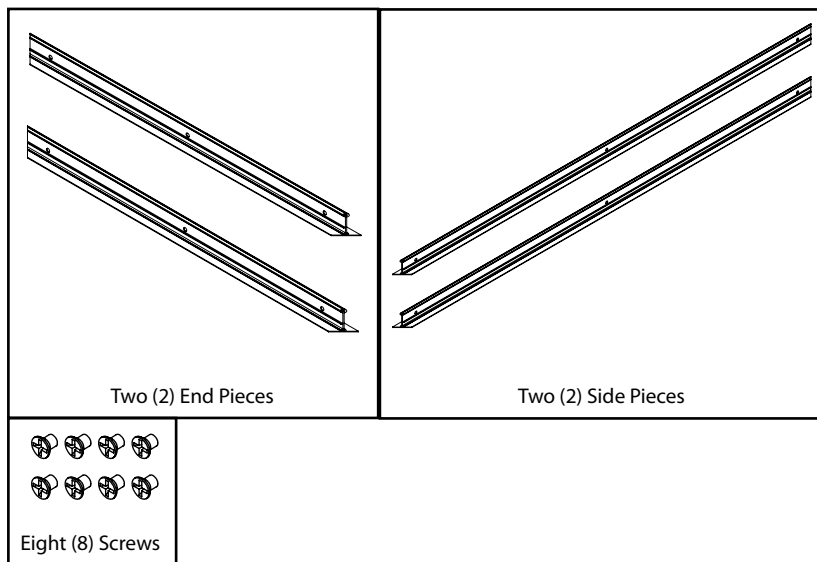


Tools & Materials Needed

This Frame kit requires very few tools for installation. A drill or a screwdriver and a pair of wirecutters, and appropriate fasteners for mounting surface

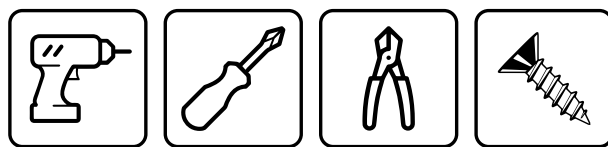


*Dimensions

- 1 Turn off power to appropriate circuit at the breaker box.





- 1 Carefully unpack the fixture from its packaging. Inspect product for defects due to shipping.


- 2 Assemble the Frame kit using hardware provided.

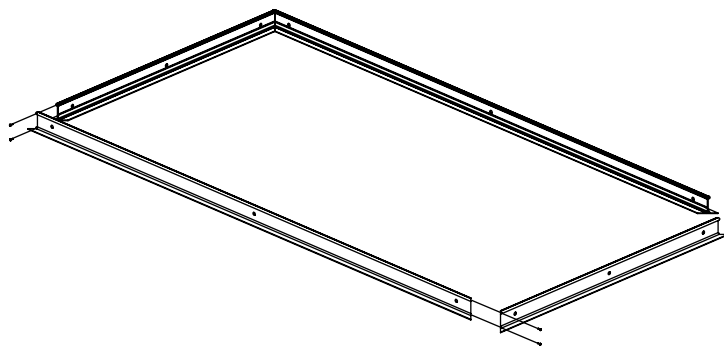

- 3 Install frame onto desired location using appropriate fasteners (not provided).

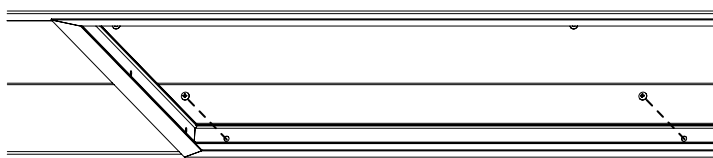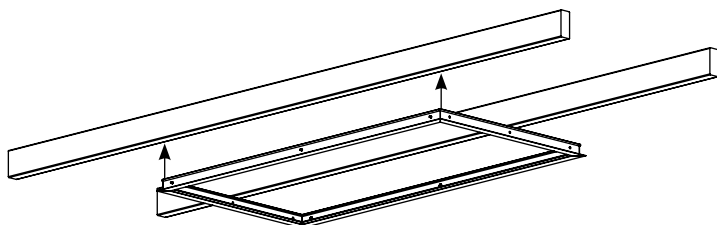


- 4 Remove access plate from junction-box (do not discard) by removing screw.

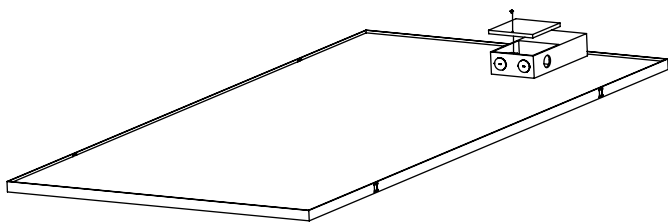


- 5 Connect wiring as shown in wiring diagram, then reattach junction box cover and secure with screw.

- 6 Lift fixture into frame, Tilt or angle fixture as need.
Alternatively, drop fixture into frame from above.

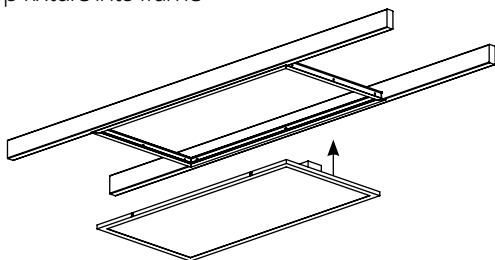

- 7 Turn power on and verify that the panel is lit.

WIRING DIAGRAM

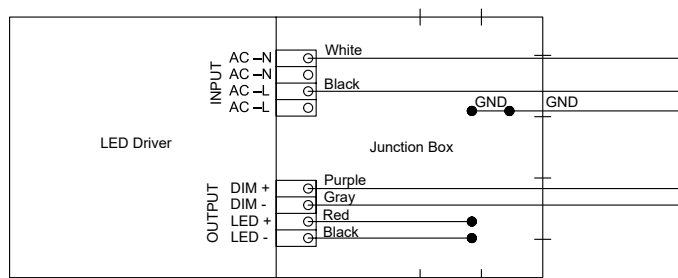

Ceiling Opening Dimensions

Series	(W) Width	(L) Length
TPE10FK14	12 3/4" (324 mm)	48 3/4" (1238 mm)
TPE10FK22	24 3/4" (629 mm)	24 3/4" (629 mm)
TPE10FK24	24 3/4" (629 mm)	48 3/4" (1238 mm)

Trim Dimensions

Series	(W) Width	(L) Length
TPE10FK14	13 3/8" (340 mm)	49 3/8" (1254 mm)
TPE10FK22	25 3/8" (645 mm)	25 3/8" (645 mm)
TPE10FK24	25 3/8" (645 mm)	49 3/8" (1254 mm)

Thank You
For Your Purchase!

WE WOULD LIKE TO HEAR FROM YOU



WRITE A REVIEW



Scan QR Code or Visit
nicorlighting.com/support/survey



NICOR



YouTube