



# UAP150 - ROUND HIGH BAY

## 150W 120-277V



Wattage & CCT Selectable High Bay

80W/120W/150W, CCT: 3000K-4000K-5000K




### FEATURES:


- Color Selectable: 3000K/4000K/5000K
- Wattage Selectable: 80W/120W/150W
- Die Cast Aluminum Housing - Black
- Powder Coat Finish
- 0-10V Dimming
- Includes 6' Wiring Cables
- IP65 Rated for Wet Locations
- IK08 Impact Rated - Protected against 5 joules of impact
- 5 Year Warranty
- 90° Beam Angle

Cat No	Housing Color	Wattage	Lumens	Lumens/Watt	CCT	Voltage	CRI	Dimming	DLC Listing
UAP150	Black	80/120/150W	23,629 max	160	3K/4K/5K	120-277V	>70	0-10V	Premium

### PHOTOMETRY:

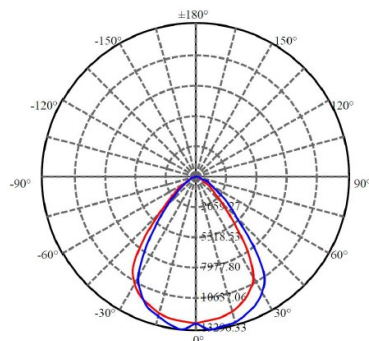

### PRODUCT DIMENSIONS:

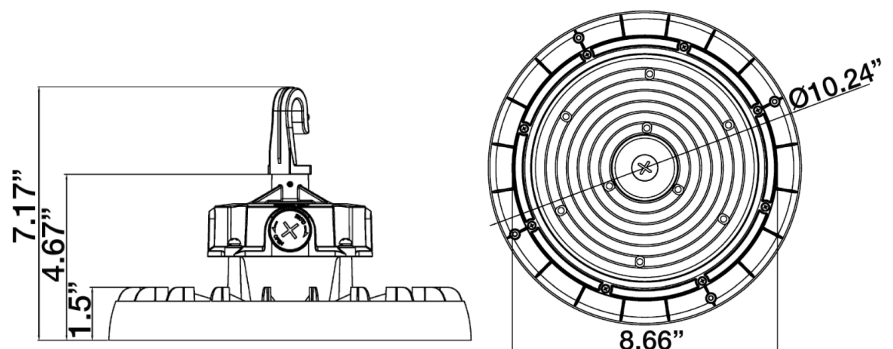



# UAP150 - 150W ROUND HIGH BAY

Wattage & CCT Selectable High Bay

80W/120W/150W, CCT: 3000K-4000K-5000K

## **Technical Specifications:**

### **Electrical:**

Input Voltage: 120-277V AC

Current: 1.25A @ 120V

Frequency: 60Hz

Power Factor:  $\geq 0.9$

THD: <20% @ 120V

### **Product Parameters:**

Watts: 80W/120W/150W selectable

Lumens: 23,629 @ 4000K, 22,108 @ 5000K,  
21,208 @ 3000K

Efficacy: 160 lumens per watt

CCT: 3000K/4000K/5000K selectable

Beam Angle: 90°

50,000+ Hours @95°F LED Life Span

### **Chromaticity Measurements:**

CRI: >70

R9: > -30

DUV: -0.003

Chromaticity (x,y): x=0.4; y= 0.4

Chromaticity (u,v): u=0.25; v= 0.5

### **Component Specifications:**

LED: LUMILEDS 2835

Driver: MOSO

Frequency: 50-60HZ

**Dimming:** 0-10V

### **Operating Temperature:**

Minimum Starting: -22°F

Maximum: 122°F

### **Construction:**

Housing: Die Cast Aluminum, Black Powder Coat Finish

IP Rating: IP65 Wet Location

Lens Material: Polycarbonate

Mounting: Hook Mount with 1/2" NPT Entry

### **Listings:**

cULus: E481931

DLC: Premium

### **Accessories Available:**

U Bracket: UAPUBRACKET

Motion Sensor: UAPSENSOR

Remote Control for Motion Sensor: UAPREMOTE

Aluminum Reflector: UAPREFLAL

Polycarbonate Reflector: UAPREFLPC

Lens for Polycarbonate Reflector: UAPLENSPC

### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).