

HP1527P • HP1527PBLS

Ballast Type: Electromagnetic
 Input Voltage: 277VAC+5%,-5%
 Input Frequency: 60 Hz.

Starting Method: Preheat
 Lamp Connection: Series
 Unit Color: Black

Unit Weight: 1.60 lb.
 Carton Quantity: 24
 Skid Quantity: 1440

ELECTRICAL SPECIFICATION:

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps	Line Current (A)	Input Power (W)	Power Factor	Max Current THD (%)	Current Crest Factor	Ballast Factor	Wiring Diagram
277	CFT13W/GX23, CFQ13W/GX23	13	1	0.08	20	≥0.90	≤30%	≤1.7	1.00	102

PERFORMANCE:

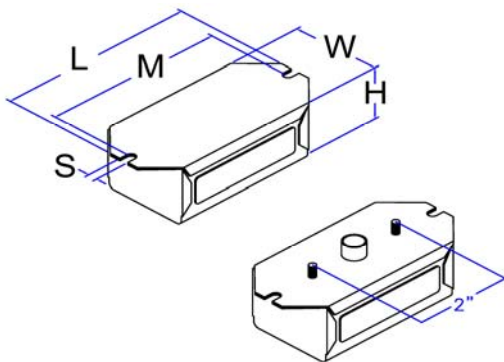
- Electromagnetic reactor type ballast
- Preheat start
- Series operation
- High power factor
- Encased & potted
- Sound rated A
- Meets ANSI C82.1

APPLICATION:

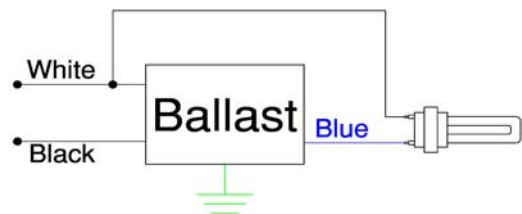
- Maximum case temperature: 194°F/90°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature: 32°F/0°C
- Remote mounting: 10 ft.

SAFETY:

- UL listed (Class P, Type HL, Type 1 outdoor)
- CSA/C22.2 Certified
- Automatic reset thermal protector
- No PCB's

STYLE:
8


H	W	L	M	S
1 5/8	2 3/16	4 3/4	4 3/8	7/32
1.63	2.19	4.75	4.38	0.22
4.14 cm	5.56 cm	12.07 cm	11.03 cm	0.56 cm

WIRING DIAGRAM:
102

Standard lead lengths:
Side Leads

- Blk: 12"
- Blu: 12"
- Wht: 12"

Bottom Leads Stud

- Blk: 12"
- Blu: 12"
- Wht: 12"

* 3/8" Strip

WARRANTY

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide's ballasts, call 1-800-323-5633 or visit www.robertsonww.com. For our energy star compliant ballasts, visit www.nema.org/lampballastmatrix

Revised 3/13/07

ROBERTSON WORLDWIDE

 13611 Thornton Rd, Blue Island, IL 60406, TEL: 1-800-323-5633, FAX: 1-877-388-2420, www.robertsonww.com