

<10% THD Electronic T5HO Fluorescent Programmed Rapid Start Systems

QUICKTRONIC® PROStart® T5HO UNIVERSAL

Professional Series

Normal Light Output

Lamp/Ballast Guide

54W T5 - PENTRON® HO

1 or 2-lamp*
QTP2x54T5HO/UNV

Also operates:

FT55DL, FPC55, L58T8

39W T5 - PENTRON HO

1 or 2-lamp*
QTP2x39-24T5HO/UNV

24W T5 - PENTRON HO

1 or 2-lamp*
QTP2x39-24T5HO/UNV

Also operates:

FT36DL, FT24DL, CF24DF,
CF36DF, FPC40, FPC22

80W T5 - PENTRON HO

1-lamp QTP1x80T5HO/UNV

Also operates:

FT80DL

*Two lamp models can be wired
for one lamp operation.

Key System Features

- Universal voltage (120-277)
- Low-profile (0.86" High)
- 100% Ballast factor
- QUICKSENSE® ballast technology (end-of-lamp-life sensing)
- PROStart programmed start
- Occupancy sensor applications
- UL type CC rated
- 0°F Starting, **-20°F Starting** for QTP 2x54T5HO Models
- Operates at >40 KHz to reduce potential interference with infrared control systems
- High power factor
- Low harmonic distortion
- Lightweight
- UL, CSA, FCC

Application Information

SYLVANIA QUICKTRONIC PHO

is ideally suited for:

- Commercial & Retail
- Hospitality & Institutional
- New Construction
- Direct Lighting
- Indirect Lighting
- Surface Mount
- Cove Lighting

SYLVANIA QUICKTRONIC PHO operates PENTRON HO, PENTRON HO Circline, and DULUX® L T5 lamps with full lumen output and optimal system performance.

SYSTEM PHO provides nearly twice the light output (188%) of T8 systems, with the same number of lamps, allowing many new design options. One lamp fixtures can now be used in place of two lamp models.

SYSTEM PHO ballasts contain QUICKSENSE ballast technology, a patented circuitry designed to shut down the system reliably and safely when lamps reach end-of-life.

Setting the standard for quality, SYSTEM PHO is also covered by our QUICK 60+® warranty, the first and most comprehensive system warranty in the industry. SYSTEM PHO covers a wide range of applications.



System Information

SYSTEM PHO operates from 120V through 277V, 50 or 60Hz, eliminating "wrong voltage" wiring errors and reducing the number of models in inventory by half.

PROStart ballasts provide optimum starting conditions to provide up to 100,000 switching cycles for use on occupancy sensors and building control systems.

QUICKSENSE ballast technology helps to protect against overheated bases and sockets, as well as cracking of the glass wall, and uses dynamic end-of-lamp-life sensing to avoid false shutdowns caused by some static sensing methods. QUICKSENSE ballast technology will auto reset when the end-of-life lamps are replaced with new ones.

The two lamp unit can be wired for one lamp operation, allowing for an additional 50% reduction in inventory model numbers.

System Type	Input Wattage	Initial Lumens	System LPW
F40T12 - E.S. Magnetic Ballast (4-lamp)	172	11590	67
F34T12 - E.S. Magnetic Ballast (4-lamp)	144	9500	66
F032T8/XP - QT4x32IS (4-lamp)	114	10800	95
FP54T5 - QTP2x54T5HO/UNV PSN (2-lamp)	121	10000	83
F032T8/XP - QT2x32IS (2-lamp)	59	5400	92
FP54T5 - QTP2x54T5HO/UNV PSN (1-lamp)	61	5000	82

SYSTEM PHO comes in a 0.87"H x 1.18"W (22mm H x 30mm W) profile, and PENTRON lamps are designed to provide peak performance at 35°C fixture ambient, allowing for smaller and more innovative fixtures.

A complete OSRAM SYLVANIA System Performance Guide showing performance characteristics of lamps and ballasts is available upon request.

<10% THD Electronic T5 HO Fluorescent Systems

PROStart® T5HO UNV Normal Ballast Factor

Performance Guide

Item Number	Description	Input Voltage (VAC)	Input Current (AMPS)	Lamp ¹ Type	Rated ^{2,3} Lumens (lm)	No. of Lamps	Ballast ³ Factor (BF)	System ³ Lumens	Input ³ Power (Watts)	System Efficacy (lm/W)
49111 (49110)*	QTP 2x39-24T5HO/UNV PSN	120-277	0.47/0.20	FP24T5HO	2000	2 1	1.00 1.00	4000 2000	55/54 29	73/74 70
49111 (49110)*	QTP 2x39-24T5HO/UNV PSN	120-277	0.76/0.32	FP39T5HO	3500	2 1	1.00 1.00	7000 3500	85/83 42	82/84 83
49131 (49130)*	QTP 2x54T5HO/UNV PSN	120-277	1.00/0.43	FP54T5HO	5000	2 1	1.00 1.00	10000 5000	121/118 61	83/85 82
49151 (49150)*	QTP 1x80T5HO/UNV PSN	120-277	0.74/0.32	FP80T5HO FT80T5DL	7000 6000	1 1	1.00 1.00	7000 6000	90 90	78 67

¹ Also compatible with other manufacturer's equivalent lamp types that meet ANSI standards.

² Rated lamp lumens and performance data based on PENTRON® HO lamps.

³ At 35°C lamp ambient temperature.

Item Number 49121 (QTP 1x54T5HO/UNV PSN) has been discontinued. Use Item Number 49131 (QTP 2x54T5HO/UNV PSN) wired for 1-lamp operation for replacement – (See enclosure size below.)

*(Item Number) = Item Number/NAED in parentheses are models with leads/wires

Specifications⁴

Starting Method: Programmed Start

Ballast Factor: 1.00

Circuit Type: Series

Lamp Frequency: > 40 KHz

Lamp CCF: Less than 1.6

Starting Temp: 0°F minimum⁵,

-20°F Starting for QTP 2x54T5HO Models

Input Frequency: 50/60 Hz

Low THD: < 10%

Power Factor: > 98%

Voltage Range: +/-10% of Rated Input

UL Listed Class P, Type 1, Outdoor, Type CC

CSA Certified

70°C Max Case Temperature

FCC 47CFR Part 18 Non-Consumer

Class A Sound Rating

ANSI C62.41 Cat. A Transient Protection

Dynamic End-of-Lamp-Life Sensing

Remote Mounting up to 18 feet⁵

⁴ Data based on PENTRON HO lamp types for primary ballast application. See the SYLVANIA QUICKTRONIC® Electronic Ballast Technology and Specification Guide (ECS-ELECTRONIC) for Pentron Circline, DULUX® L/F and other combinations.



⁵ Operation below 50°F may affect light output or lamp operation – see "Low Temp. Starting" definition. Remote red leads up to 18 feet. Keep blue leads <10 feet.

System Life / Warranty

QUICKTRONIC products are covered by our QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to our QUICK 60+ warranty bulletin.

Ordering Guide

Specifications subject to change without notice.

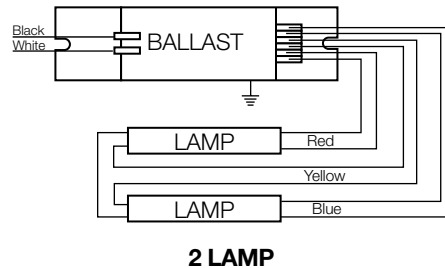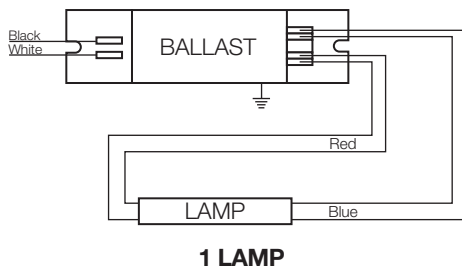

Dimensions:

Model QTP2x39-24T5HO/UNV PSN and

QTP1x80T5HO/UNV PSN enclosure size:

Overall: 14.17"L x 1.18"W x 0.87"H (360mm L x 30mm W x 22mm H)

Mounting: 13.74" (349mm)

Model QTP2x54 T5HO/UNV PSN enclosure size:

Overall: 16.73"L x 1.18"W x 0.87"H (425mm L x 30mm W x 22mm H)

Mounting: 16.34" (415mm)

Wiring:

Push-in connectors (no leads provided)

Use 18AWG solid copper wire only


Packaging:

Quantity: 20 (non-leaded)

10 (leaded)

Weight: 1L: 0.68 lbs (0.31 kg) each (approx)

2L: 0.88 lbs (0.40 kg) each (approx)

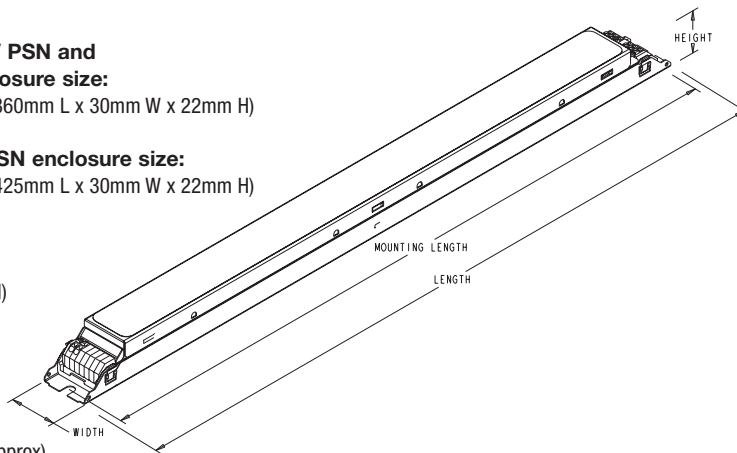

Item Number **49131** **QTP 2 x 54 T5HO/UNV PSN** Starting/Ballast Factor
 QUICKTRONIC PROFESSIONAL Line Voltage (120-277V)
 Number of Lamps (1, 2) Primary Lamp Wattage

All trademarks are property of OSRAM SYLVANIA, Inc. SYLVANIA is a registered trademark of OSRAM SYLVANIA, Inc.
 DULUX and QUICKTRONIC are registered trademarks of OSRAM GmbH, used under license.