

LEDVANCE T4 Compact Fluorescent Programmed Rapid Start Ballast

120-277 Volt High Efficiency

Normal Ballast Factor

LTP CF UNV Models Lamp/Ballast Guide

2 Lamp T4 CF Ballast 120-277V PSN Dual Mount

Primary lamps: CF 26W DD/E, DT/E

Also operates:

CF 32W DT/E, 42W DT/E


Scan or click QR code to access Ballast Compatibility Listing



Application Information

This LEDVANCE Professional Ballast is ideally suited for:

- Commercial and retail
- Hospitality and institutional
- New construction
- Wall scones and recessed downlights

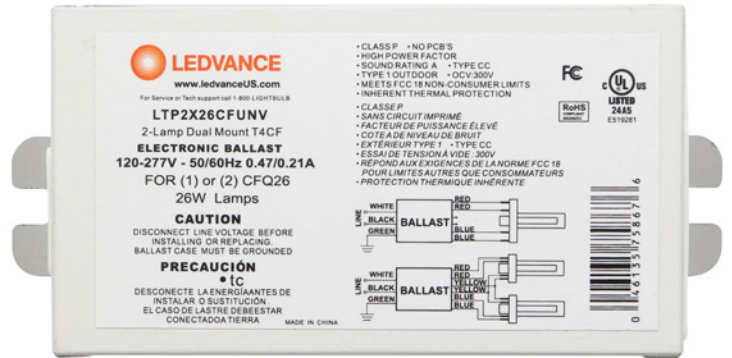

Ordering Information

Item Number	Description	# of Lamps	Primary Lamp (W)	Lamp family	Line Voltage	Starting Method	Dual Mount	Case Size	Packaging
75867	LTP2X26CFUNVDM	2	26	CF= T4 CF	UNV	PS	DM	Small	20/CS 1/SKU


Electrical Specifications at 120-277V

Item Number	Description	Input Current (AMPS)	Lamp Type	Rated Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens (lm)	Mean Lumens (lm)	Input Power (W)	System Efficacy (lm/W)	BEF*
75867	LTP2X26CFUNVDM	0.30	26W DD/E T/E	1800	2	1	1800	1550	50	67	1.88
		0.16	26W DD/E T/E	1800	1	0.96	3600	3095	27	64	3.570

*Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power
277V 60Hz data



Wiring Diagram

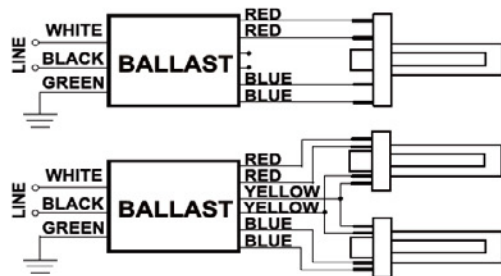

Note: For one lamp applications, cap all unused leads
Insulate to 400 volts.

Dimensions:


Overall: 5.05"L x 2.42"W x 0.9"H
(128.27mm L x 61.47mm W x 22.86mm H)
Mounting: 4.66" (118.36mm)
Weight: 0.48 lbs. each (approx.)

Packaging:


Quantity: 20 per case/1 per SKU

Wiring:

DUAL (side and bottom) wire-trap
connectors, for quick and easy installation

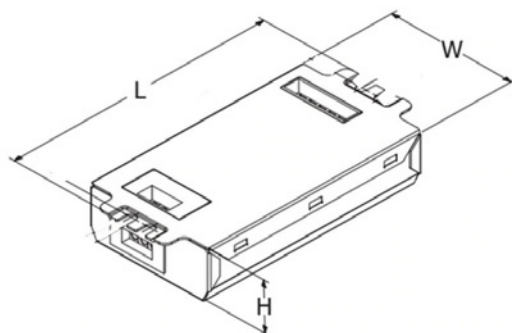

Ordering Guide

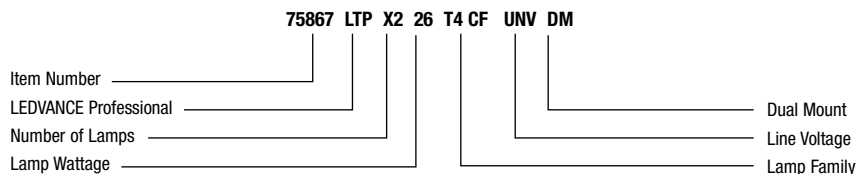

Specification Data

Type

Catalog #

Project

Comments

Prepared by

Performance Guide

Data based on fluorescent lamps shown. LTP
Programmed Rapid Start based on fluorescent lamps
shown. LTP Programmed Rapid Start ballasts are also
compatible with other lamps manufacturers equivalent
lamps types that meet ANSI specifications.

Specifications

Starting Method: Programmed Rapid Start
Ballast Factor: 2 lamp @ 277V 0.97, 1 lamp @
277V 0.82, 2 lamp @ 120V 0.88; 1 lamp @ 120V
0.81
Circuit Type: Series
Lamp Frequency: >42kHz
Input Frequency: 50/60 Hz
Low THD: <10%
Power Factor: >98% @120V >97% @277V
Voltage Range: ±10% rated input

Operating Temperatures¹

Starting Temperature: -5°F (-20°C)

Case Temp: 194°F (90°C) Max

Max Ambient Temp: 131°F (55°C)

Product Ratings

UL Listed Class P, Type 1, Outdoor

FCC Part 18 Non-Consumer

Class A Sound Rating

ANSI C62.41 Cat. A Transient Protection

RoHS Compliant²

No PCBs, Type CC

¹ Operation below 50°F (10°C) may affect light output or
lamp operation.

² Complies with European Union Restriction of Hazardous
Substances (Directive 2002/95/EC)

Installation Notes

- Ground ballast case
- Install in accordance with the National
Electrical Code
- Remote Mounting: 18ft. max lead length
18AWG

System Life/Warranty

LEDVANCE ballasts carry a five-year warranty from
date of manufacture. For additional details, check
out the latest Warranty Bulletin on our website,
ledvanceUS.com.



SCAN OR CLICK QR
CODE TO ACCESS
WARRANTY.

LEDVANCE LLC

181 Ballardvale Street, Suite 203

Wilmington, MA 01887 USA

Phone 1-800-LIGHTBULB (1-800-544-4828)

www.ledvanceUS.com

LEDVANCE is a registered trademark. All other trademarks are those of
their respective owners. Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA

© 2023 LEDVANCE LLC

2 of 2

