

Specification Sheet


Saf-T-Brace®

For Retrofit or New Construction Applications

Item Number **01400**

Specifications

- Larger box for increased wiring capacity
- Teeth twist and lock into joist to create more secure connection
- Fits 16" to 24" ceiling joists
- Fits all ceiling fans
- Installs without attic access in four easy steps
- Ideal for retrofit applications
- For fixture support of 150 lbs. or less on 16" centers
- For fixture support of 50 lbs. or less on 24" centers
- Acceptable for fan support of 70 lbs. or less
- Heavy duty, 21.5 cubic inch dual mount* electrical box
- Box depth - 2 7/8"
- 6 - 1/2" Romex or conduit knockouts
- Position box anywhere along brace
- Includes plastic Romex connector

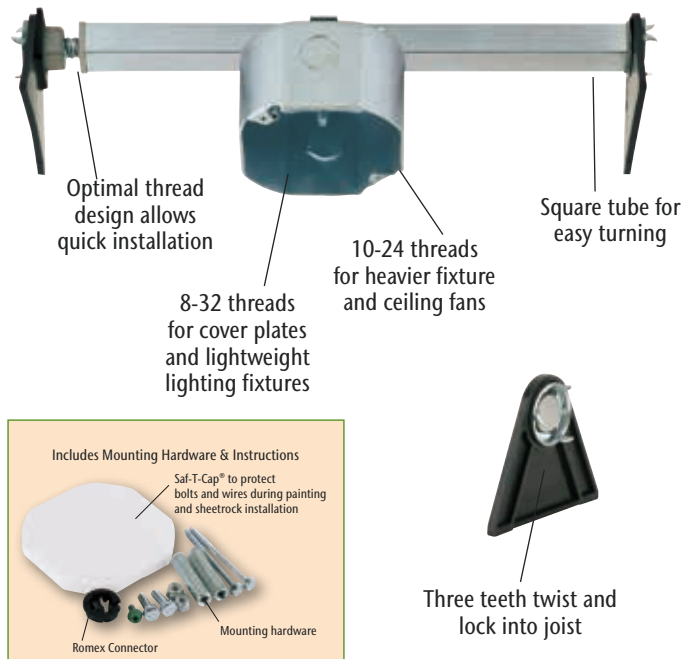


Pack Information

- Individually Packaged
- 12 Per Cut Case

Patented Design Provides Fast, Fingertip Expansion and Positive Attachment to Joists


Step 1

Easy installation from below ceiling through any 4" diameter hole.




Step 2

Rotate bar until teeth are fully embedded into joist.



Step 3

Attach electrical box and install fan or lighting fixture per manufacturer's instructions.



**US PATENT NO.
5,860,548**

*Includes Mounting Hardware And Instructions.
Meets or Exceeds UL Standards Regarding Exposed Threads Within Box.
Meets or Exceeds NEC® Safety Codes.*

**Dual Mount = Box is threaded for 8-32 (ideal for box covers and lightweight fixtures) and 10-24 screws (ideal for heavier fixtures and ceiling fans).*

Romex® is a registered trademark of Southwire Company.

Call 1-800-999-2226 or visit www.westinghouselighting.com.

Westinghouse Lighting, Philadelphia, PA 19154-1029, U.S.A. Westinghouse Lighting, a Westinghouse Electric Corporation licensee
® "Westinghouse" and "You can be sure...if it's Westinghouse" are all registered trademarks of Westinghouse Electric Corporation.

