




Long-lasting and low maintenance, LED-based light sources are an excellent solution for all lighting applications. For optimal performance, these solutions require reliable drivers matching the long lifetime of the LEDs. **The Advance Xitanium LED Outdoor Driver portfolio** offers a range of products specially designed to operate LED solutions in outdoor applications. These drivers are designed for hard-wired integration into outdoor luminaires for the most rugged applications. They operate to specification under wide temperature and electrical ranges to ensure reliability.

Specifications

Input Voltage (Vrms)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency@ Max Load and 70°C Case	Max. Case Temp. (°C)	Input Current (Arms)	Max. Input Power (W)	Inrush Current ($A_{pk}/10\%-\mu s$)	THD @ Max. Load	Power Factor @ Max. Load	Surge Protection Common/Diff (KV)	Weight (Lbs/kgs)	Envir. Protection Rating	Driver Type
120	55	25 - 52 Class 2 Output	0.35 - 1.05	87	75	0.51	61	11/270	<10%	>0.95	3/3	1.24/0.56	UL Dry & Damp	Constant Current
277				89		0.22		24/240						

Enclosure

	In. (mm)
Case Length	5.43 (138.00)
Case Width	2.32 (59.00)
Case Height	1.50 (38.00)
Mounting Length	5.98 (152.00)
Mounting Width	1.69 (42.88)
Overall Length	6.61 (168.00)

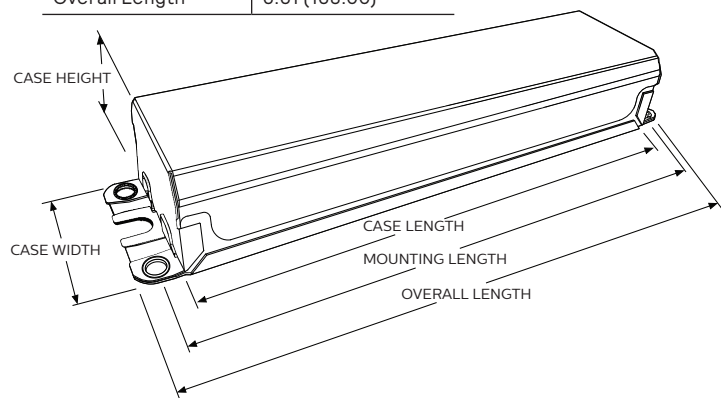


UL Conditions of Acceptability:

Please contact your representative for a copy of the latest UL Conditions of Acceptability (COA).

Warning

- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.

Wiring Diagram

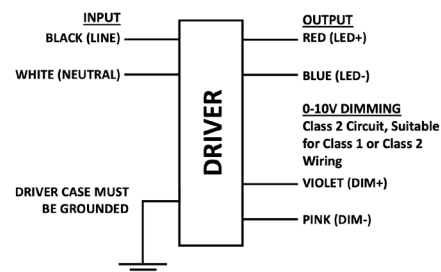

Input and output use lead-wires.

Lead-wires are 18AWG 105C/600V solid copper per UL1452.

Lead Length outside enclosure:
270 mm (± 30 mm) on all wires.

Dimming	Dimming Range	Minimum Output Current (A)	Other Comments
0-10V Analog Class 2 Wiring Only	10% - 100%	0.05	Dimming source current: 150 μA ($\pm 3\%$)

Xitanium XI055C105V052BNY1

55W 120–277V 0.35–1.05A 0–10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Features	Benefits	Application
• 50,000+ hour lifetime¹ • Isolated 0–10V dimming • New housing with high thermal capability	• Enables long life luminaire designs • Helps to maximize energy savings and allows application specific light levels • Allows luminaire designs for ambient environments	• Area • Roadway • Parking garages • Floodlights 1. Advance Xitanium LED Drivers are designed and manufactured to engineering standards correlating to an average life expectancy of 50,000 hours of operation at maximum rated case temperature. Minimum 90% survivals based on MTBF modeling.

Product Data

Order Information	
Order Code	XI055C105V052BNY1
Full Product Code	XI055C105V052BNY1M (Mid-Pack, 12pcs/Box)
Full Product Name	XITANIUM 55W 0.35–1.05A 0–10V INT-Y
Line Voltage	120–277Vac_rms
Line Current	0.51A @ 120V, 0.22A @ 277V
Line Frequency	50/60Hz
Min. Mains Voltage Operational	108V
Max. Mains Voltage Operational	305V
THD (total)	Refer to graph
Power Factor (PF)	Refer to graph
Efficiency	Refer to graph
Inrush Current	Per NEMA 410
Lightning Surge Protection	Refer to table
Output Information	
Output Voltage Range	25V to 52Vdc
Maximum Open Circuit Voltage	56V
Output Current (ripple = peak to average / average)	15% max @ max Iout @ max Vout (52Vdc) Low frequency (≤120 Hz) content <5%
Protections	Short Circuit and Open Circuit Protection for LED + and LED –
Operating Ambient Temp. Range	–40°C to +55°C
Max Case Temperature (Tcase)	75°C
Features	
Interfaces	0–10V Dimming, AOC
Adjustable Output Current (AOC)	0.35 – 1.05A, 0.1A per step, selected by Dip Switch (refer to graph and notes in the Application section)
0–10V Dimming Specifications	150µA source current from driver. See dim curve for detail.
Environment & Approbation	
Environmental Protection Rating	UL dry and damp, Type HL
Agency Approbations	UL8750, UL1310, UL935
Electromagnetic Compliance	FCC Title 47 Part 15 Class A
Isolation	Refer to table
Audible Noise	<24dB Class A

Xitanium XI055C105V052BNY1

55W 120-277V 0.35-1.05A 0-10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

0-10V Dimming Curve:

Dimming source current from the driver: 150µA (±3%) (@ 0<Vdim<8V)

LED Current Tolerance at 1050mA ≤5% (≤50mA at 100-1050mA, ≤20mA at less than 100mA) over temperature and component variations


Minimum Dim Level: 10% of Iout max (set via AOC), or 50mA whichever is higher.

Maximum output voltage on the dimming wires: 12V


The dimming lead leakage current is 0.01mA. The maximum number of drivers that can be connected in parallel to one dimming control circuit is based on this dimming lead leakage current and the calculation is described in the corresponding Design-in Guide.

Approved Dimmer List

Manufacturer	Manufacturer Part Number
Lutron	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver
Leviton	IllumaTech IP7 series
Advance	Sunrise - SR1200ZTUNV

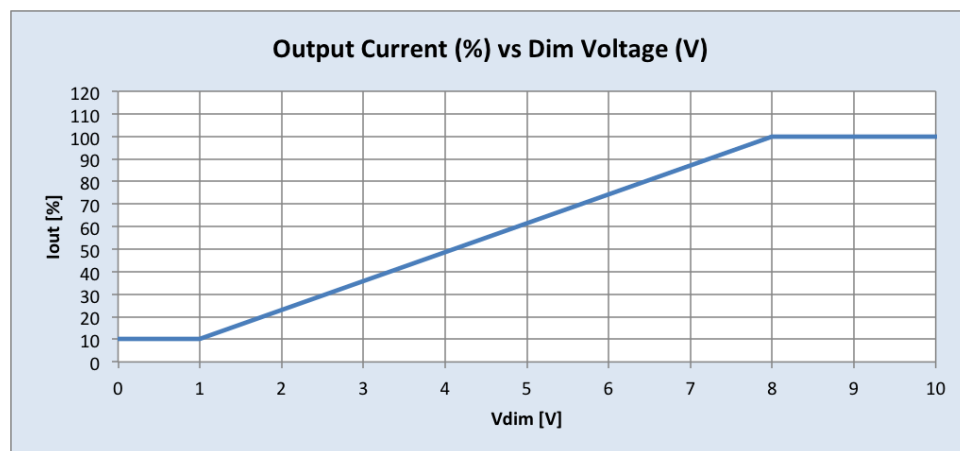

AOC Configuration:



Iout is selected by
DIP SWITCH

Dipswitch position (ON:1 OFF:0)			Iout
1	2	3	
1	1	1	1.05A
1	1	0	0.95A
1	0	1	0.85A
1	0	0	0.75A
0	1	1	0.65A
0	1	0	0.55A
0	0	1	0.45A
0	0	0	0.35A


Xitanium XI055C105V052BNY1

55W 120-277V 0.35-1.05A 0-10V


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Efficiency vs. Output Voltage at 120Vac @ Tc=70°C

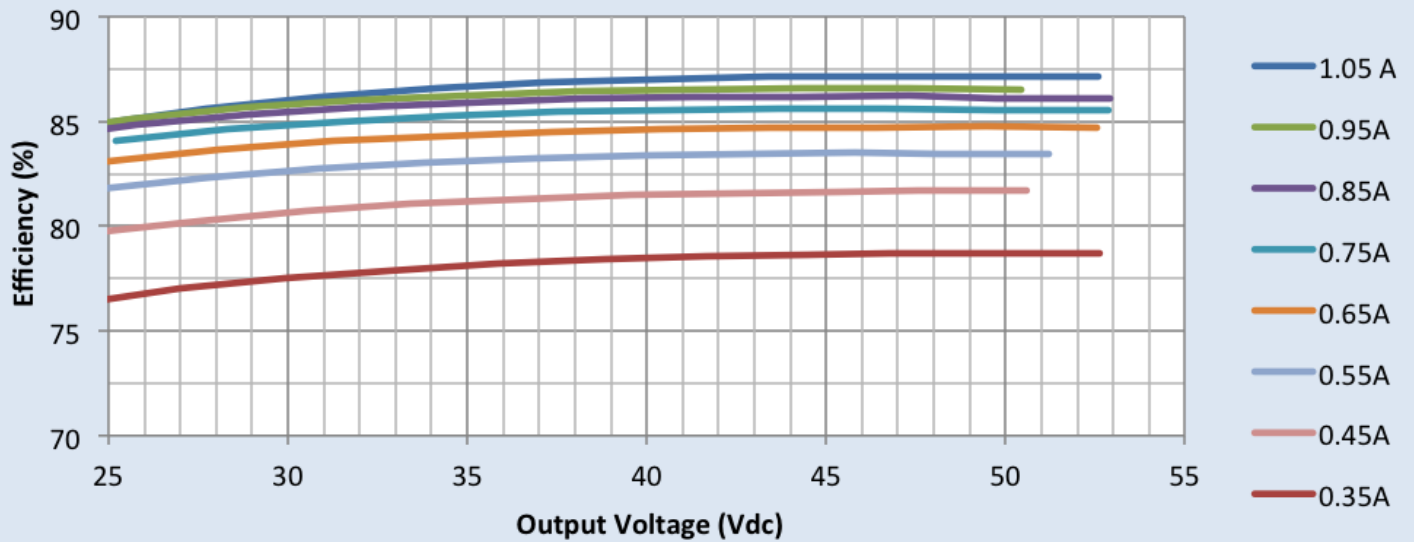

Efficiency vs. Output Voltage at 277Vac @ Tc=70°C

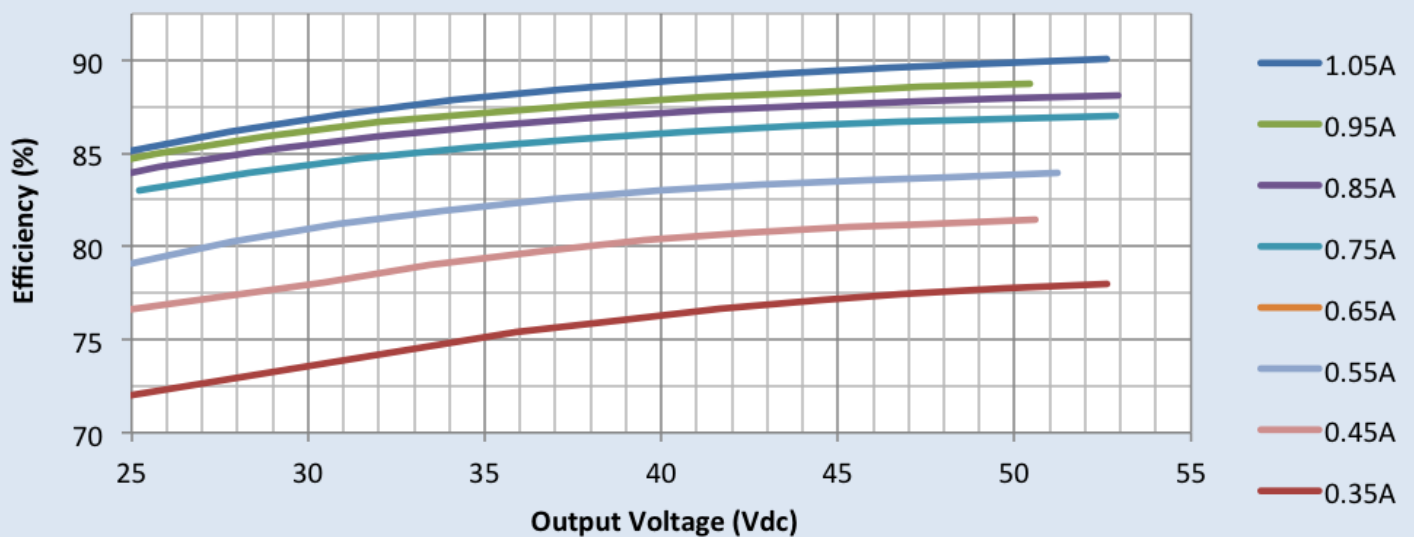


Xitanium XI055C105V052BNY1

55W 120-277V 0.35-1.05A 0-10V


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Power Factor vs. Output Power @ Tc=70°C

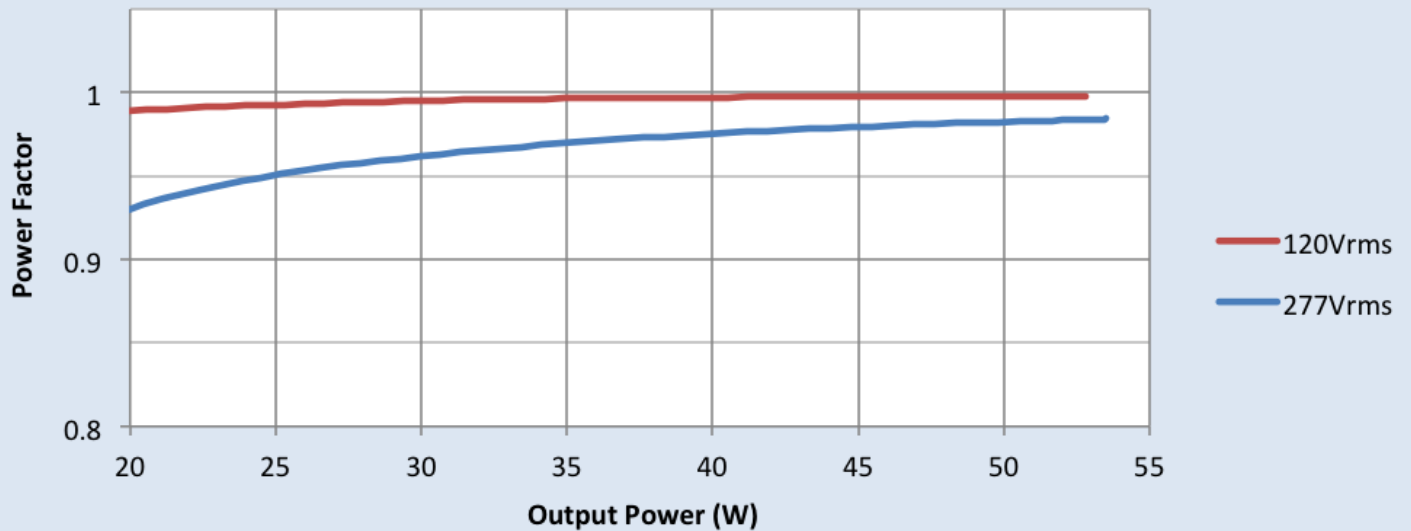

Total Harmonic Distortion vs. Output Power @ Tc=70°C

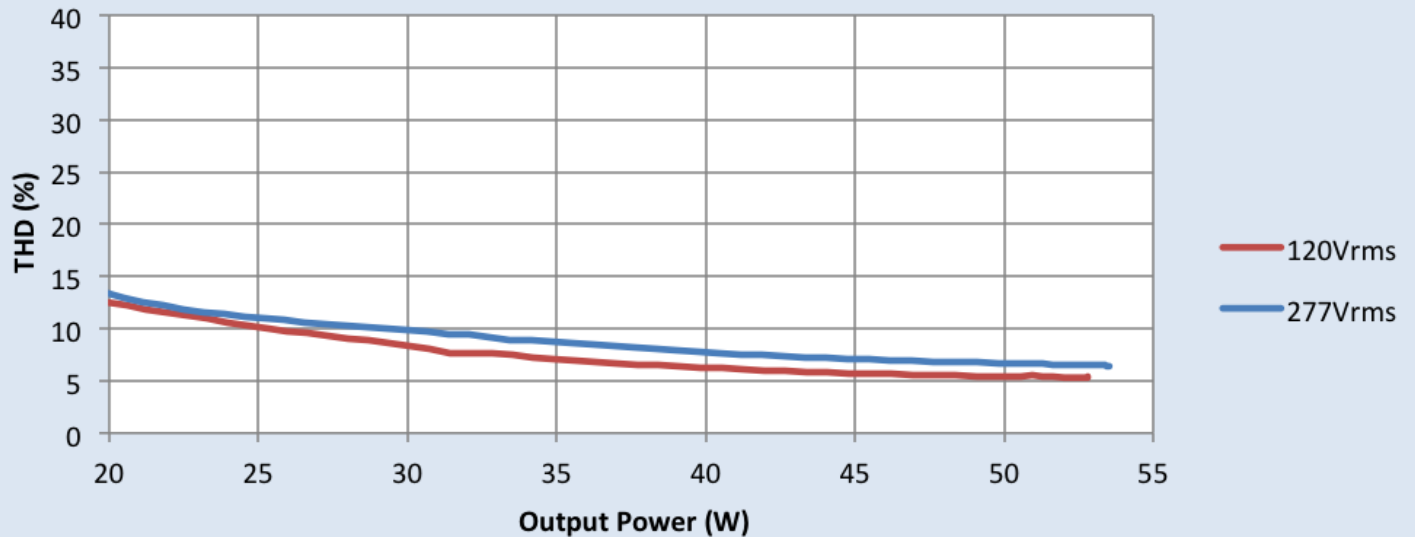


Xitanium XI055C105V052BNY1

55W 120-277V 0.35-1.05A 0-10V


Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Output Current Vs. Driver Case Temperature:

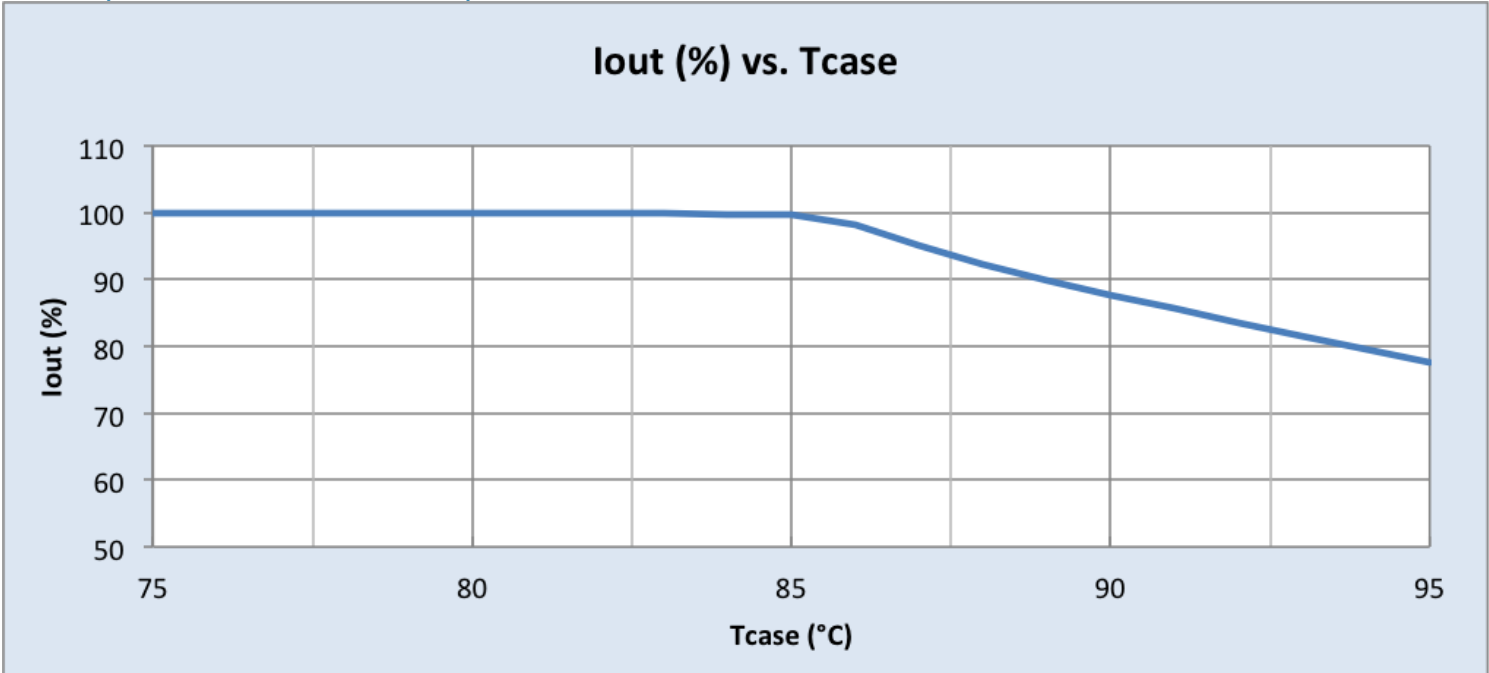


Driver Lifetime Vs. Driver Case Temperature:

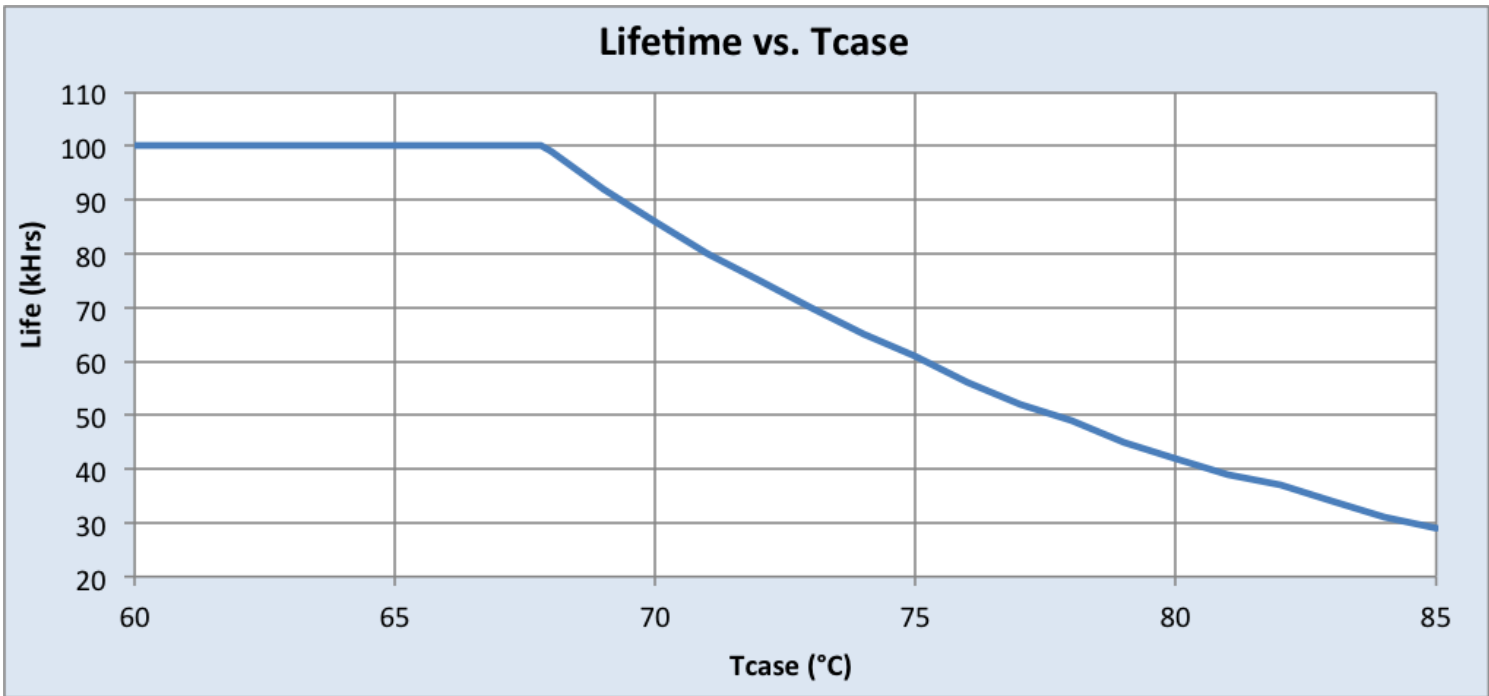

Xitanium XI055C105V052BNY1

55W 120-277V 0.35-1.05A 0-10V

Inrush Current Info:

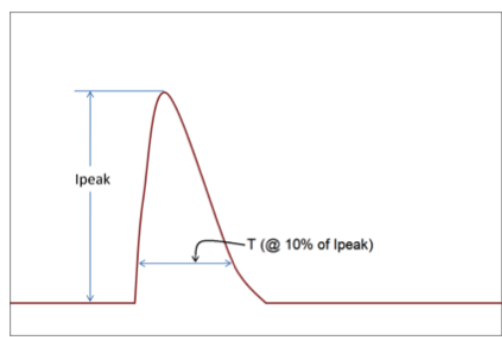

Vin	Ipeak	T (@ 10% of Ipeak)
120 Vrms	11A	270 μ s
277 Vrms	24A	240 μ s

Inrush current is measured at peak of the corresponding line voltage, source impedance per NEMA 410.

Lightning Surge Info:

ANSI Surge Type	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
1.2/50 μ s Combination Wave (w/t 2 ₂)	3kV	3kV

Isolation:

Isolation	Input	Output	0-10V (Class 1 & 2)	Enclosure
Input	NA	2xU+1kV	2.5KVac	2xU+1kV
Output	2xU+1kV	NA	NA	2xU+1kV
0-10V (Class 2)	2.5KVac	NA	NA	2xU+1kV



The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.



© 2022 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation
400 Crossing Blvd, Suite 600
Bridgewater, NJ 08807
Telephone: 855-486-2216

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.