




Product Overview

XI100C070V146CNF1M	
Brand Name	XITANIUM
Description	XITANIUM 100W 0.7A 0-10V Dimming
Input Voltage	120~277V
Input Frequency	50/60Hz
RoHS	Yes
Approbations	UL, CSA
Status	Released

Input Voltage (Vac)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency @ Max Load	Max Case Temp. (°C)	Input Current (Arms)	Max. Input Power (W)	Inrush Current (A _{pk} /50%-μs)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protection Common/Diff (KV)	Weight (kg)	Envir. Protection Rating
120	100	60 - 146	0.70	91	80	0.95	110	63.2/137	<10	>0.95	3/3	2.1/0.95	UL dry & Damp
277				92.5		0.42		170/131.5	<10				

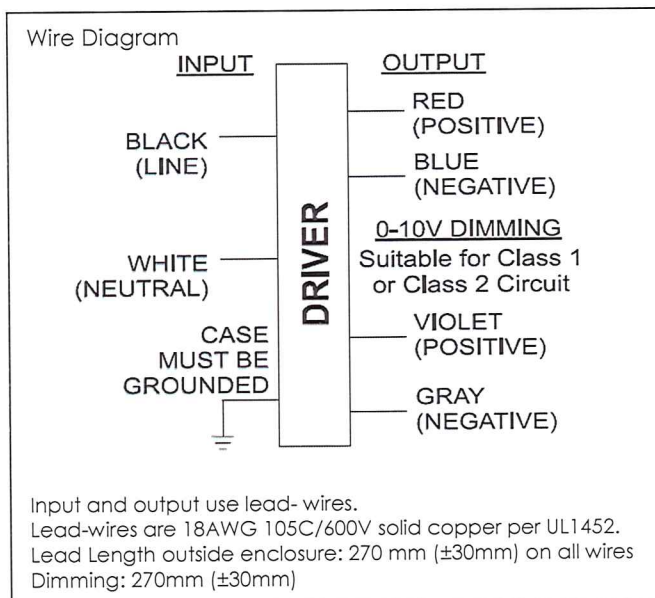

Dimming	Dimming Range	Minimum Output Current (A)	Other Comments
0-10V Analog	10% ~ 100%	0.07	Dimming source current: 150 μA (±3%)

Enclosure



	In. (mm)
Case Length	8.38(211.1)
Case Width	2.35(59.1)
Case Height	1.56(39.7)
Mounting Length	9.0(226.2)
Mounting Width	1.7(42.9)
Overall Length	9.54(240.5)

Revised 10/08/2014

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018

Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance

Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886