

# LED Designer Deco

## 6.5ST19/VIN/820/E26/Amber/G/SP/D 1PFT20


Philips LED Designer Deco lamps allow you to maintain a warm, classic light or a modern, chic effect while providing longer life and energy savings

### Product data

General information	
Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000
Light technical	
Color Code	820 [ CCT of 2000K]
Beam Angle (Nom)	330 °
Initial lumen (Nom)	400 lm
Color Designation	Flame
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	61 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	6.5 W
Lamp Current (Nom)	75 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
UL Type	Yes

Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Ambient (Max)	113 °F
T-Ambient (Min)	-4 °F
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Finish	Amber
Bulb Material	Glass
Bulb Shape	ST19
Product data	
Order product name	6.5ST19/VIN/820/E26/Amber/G/SP/D 1PFT20
EAN/UPC - Product	046677565626
Order code	565622
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002986903
Net Weight (Piece)	0.097 lb


Dimensional drawing




6.5ST19/VIN/820/E26/Amber/G/SP/D 1PFT20

Product	D	C
6.5ST19/VIN/820/E26/Amber/G/SP/D 1PFT20	2-9/16 in	5-7/16 in

Photometric data




General Uniform Lighting



Light Distribution Diagram

General uniform lighting

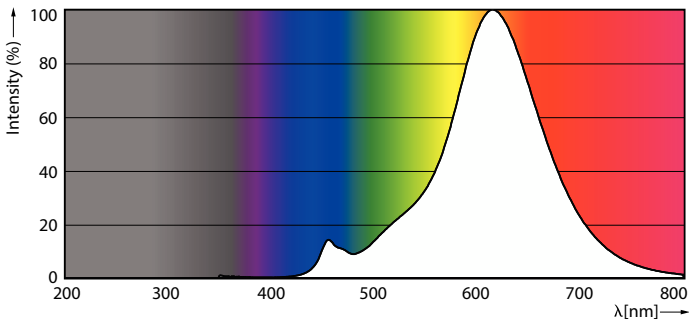

Spectral Power Distribution Colour

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram

