



# Mark 7 0-10V

## MARK 7 0-10V IZT4PSP32G35M

The Mark 7 0–10V series of dimmable electronic ballasts offer maximum versatility by incorporating separate control leads for use with a wide array of controllers, including occupancy sensors, daylight harvesting controls, and building management systems from more than 40 manufacturers. When paired with linear fluorescent and 4-pin compact fluorescent lamps, these ballasts optimize the benefits of such popular sustainable lighting techniques as daylight harvesting, occupancy sensing, and load shedding to satisfy the need for an affordable, flexible and versatile controllable lighting solution. The Mark 7 0–10V series of dimmable electronic ballasts offer maximum versatility by incorporating separate control leads for use with a wide array of controllers, including occupancy sensors, daylight harvesting controls, and building management systems from more than 40 manufacturers. When paired with linear fluorescent and 4-pin compact fluorescent lamps, these ballasts optimize the benefits of such popular sustainable lighting techniques as daylight harvesting, occupancy sensing, and load shedding to satisfy the need for an affordable, flexible and versatile controllable lighting solution.

### Product data

#### • General Information

Lamp Type	F32T8
Number Of Lamps	4 piece/unit
Ballast Type	Dimmable Fluorescent
Base Model	IZT4PSP32G
Suitable For Outdoor Use	Yes
Automatic Restart	Yes

#### • Operating and Electrical

Input Voltage	120 to 277 V
Input Frequency	50 to 60 Hz
Total Harmonic Distortion USA	10 %
Ignition Method	Programmed Start
Crestfactor (Nom)	1.7
Ignition Time (Nom)	1.5 s
Ballast Factor (Max)	0.88

Ballast Factor (Min)	0.05
Power Factor (Nom)	0.99
Input Current (Max)	0.95 A
Input Current (Min)	0.40 A
Input Power (Max)	114 W
Input Power (Min)	24 W
Rated Lamp Power	32 W

#### • Wiring

Color Input Terminals	Black, White, Violet and Gray
Color Output Terminals	RED, YEL, BLU, BLU/WHT & RED/WHT
Wire Striplength	0.375 mm
Control Wire Gauge	18AWG
Lamp Connection	Parallel
Wire Length By Color	No wires

**PHILIPS**

Wire Gauge (Nom)	18AWG mm
Wire Type	Solid
Remote Wiring Configuration Allowed	No
Tandem Wiring Configuration Allowed	No
Through Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	No Remote
Max Ballast-Lamp Distance Tandem Wiring	No Tandem
Max Ballast-Lamp Distance Through Wiring	Red Blue BLU/WHT RED/WHT = 5'
Connector Type	Poke-In

## • Temperature

T-Case Maximum (Nom)	70 °C
----------------------	-------

## • Mechanical and Housing

Housing Material	Metal
------------------	-------

Housing	G
Housing Dimensions	16.7" x 1.7" x 1.18"


## • Approval and Application

EMC Immunity Standard	FCC Consumer
Approval Marks	CSA certificate UL certificate CEC Listing CEE Rated NEMA Premium RoHS Compliant
Hum And Noise Level	A
UL Recognized	No

## • Product Data


Order product name	MARK 7 0-10V IZT4PSP32G35M
EAN/UPC - Product	781087130766
Order code	913701251002
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	913701251002
Net Weight (Piece)	1.212 kg

## Dimensional drawing

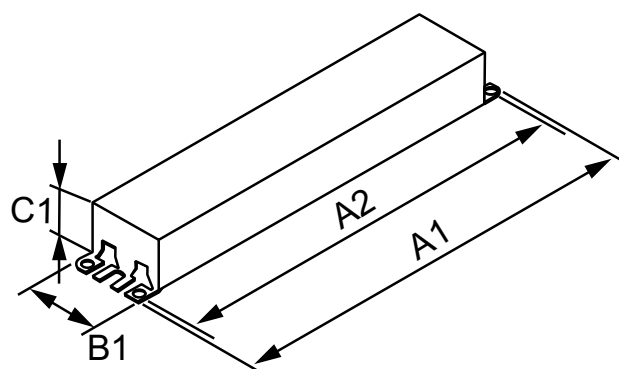

## ELE DIMMING BALLAST (4) F32T8 120-277V

Product	A1	A2	B1	C1
MARK 7 0-10V IZT4PSP32G35M	16.70 in	16.34 in	1.70 in	1.18 in

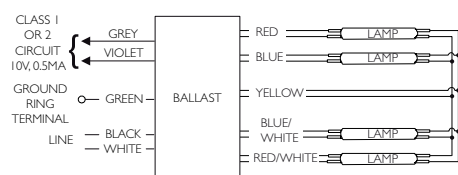

© 2016 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2016, February 1  
data subject to change