


# Field Adjustable Wrap Light Fixture

## Power and CCT Selectable Wrap Light

Sunlite's Field Adjustable Wrap Light offers three lumen output and white color options. Adjustments made via sliding switches located on the fixture housing.

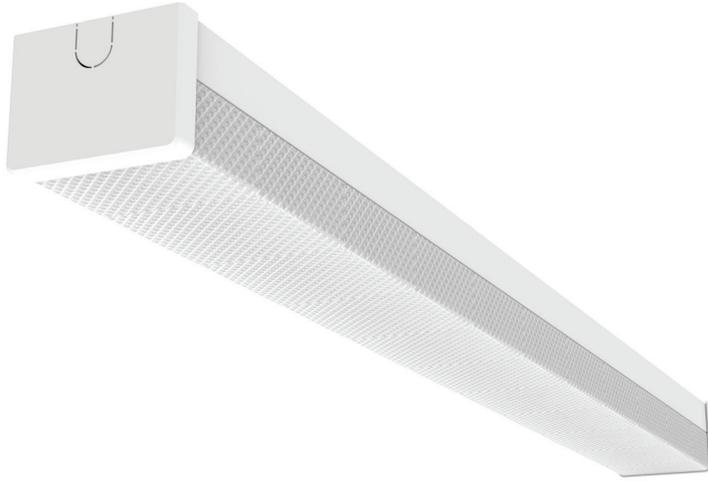

## Features

- Field adjustable Wattage and CCT on all models
- Multiple mounting options
- Battery backup and/or bi-level motion sensor options
- 0-10V dimmable 10-100%
- Suitable for Stairwells, Schools, Parking Garages, Hospitals

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

## Technical Specifications

### Construction

Fixture Material	Steel
Fixture Finish	White
Lens Material	Polystyrene
Lens Finish	Prismatic
Shape	Linear

### Electrical

Input Voltage	120-277Vac
Operating Frequency	60Hz
Power Factor	>0.9
Dimmable	0-10V / 10-100%

### Photometrics

Color Rendering Index (CRI)	90
Beam Spread	110°
Lifespan (L70)	50,000 hours

### Ratings / Certifications

Safety Certification	ETL
Safety Rating	Damp Location
Operating Temperature	-4°F - 122°F (-20°C - 50°C)
DLC	Standard 5.1
FCC	FCC Part 15, Subpart B
Warranty	5 years



# Field Adjustable Wrap Light Fixture



## Ordering Matrix (fixture)

Brand	Family	Shape	Size	Wattage	CCT	Voltage	Finish	Options
SF	WR4	LN		MW	3S	MV	WH	
	WR4 4" Wide Wraparound	LN Linear	24 24in 36 36in 48 48in	MW <sup>1</sup> Wattage Selectable	3S CCT Selectable 30K/40K/50K 90CRI	MV 120-277V	WH White	EM Battery Backup BLS Bi-level Sensor BLS/EM Bi-level Sensor /Battery Backup

<sup>1</sup>24" - 10/15/18W 48" - 18/25/30W 96" - 20/28/36W

## Performance Data

### SF/WR4/LN/24/MW/93S/MV/WH (2 Ft) @120V

10W	3000K	4000K	5000K	15W	3000K	4000K	5000K	18W	3000K	4000K	5000K
Lumens	1205	1287	1306	Lumens	1791	1931	1926	Lumens	2113	2295	2264
Lm/W	120	129	130	Lm/W	119	129	128	Lm/W	117	127	126

### SF/WR4/LN/36/MW/93S/MV/WH (3 Ft) @120V

18W	3000K	4000K	5000K	25W	3000K	4000K	5000K	30W	3000K	4000K	5000K
Lumens	2209	2353	2389	Lumens	3003	3248	3220	Lumens	3528	3825	3777
Lm/W	123	131	133	Lm/W	120	130	129	Lm/W	117	127	126

### SF/WR4/LN/48/MW/93S/MV/WH (4 Ft) @120V




20W	3000K	4000K	5000K	28W	3000K	4000K	5000K	36W	3000K	4000K	5000K
Lumens	2482	2646	2688	Lumens	3391	3665	3648	Lumens	4255	4640	4547
Lm/W	124	132	134	Lm/W	121	131	130	Lm/W	118	129	126

## Ordering Code (accessories)




Catalog	Type
SF/EM/LN/8W SF/WR4/LN/SK	8W Emergency Backup Driver 5Ft Suspension Kit

## Photometric Data




### SF/WR4/LN/24/MW/93S/MV/WH (2 Ft)

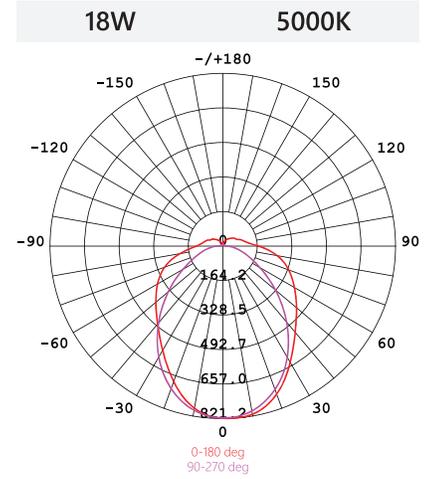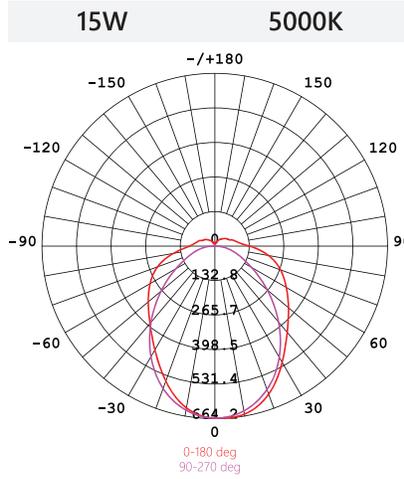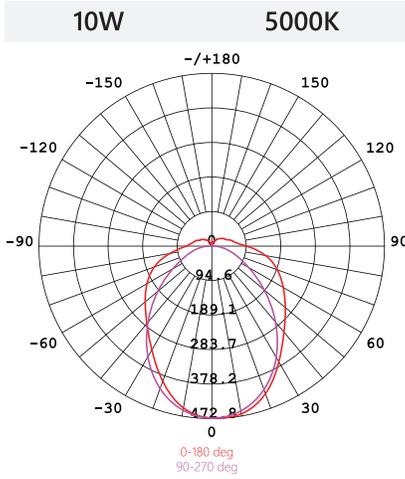

### SF/WR4/LN/36/MW/93S/MV/WH (3 Ft)

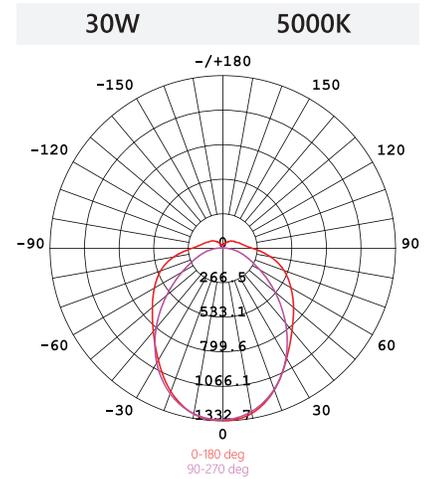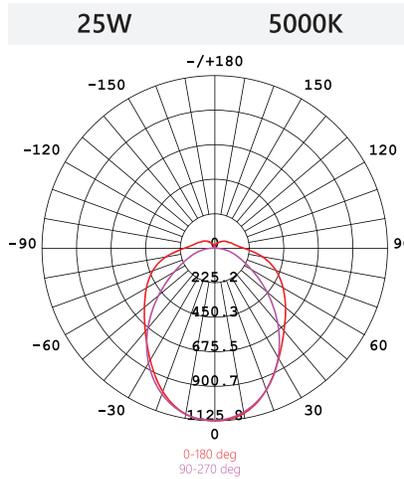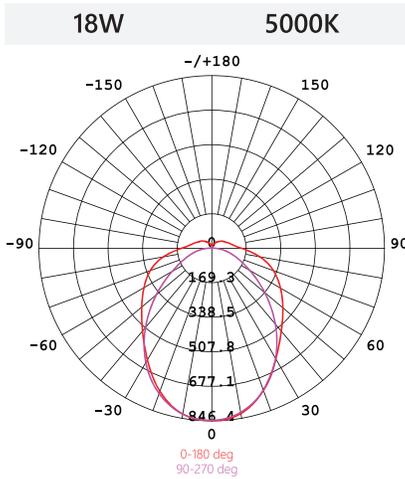


### SF/WR4/LN/48/MW/93S/MV/WH (4 Ft)

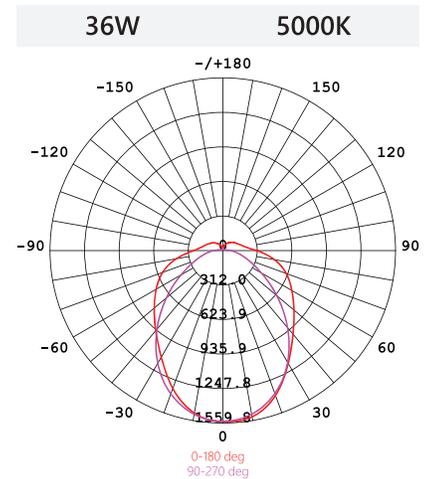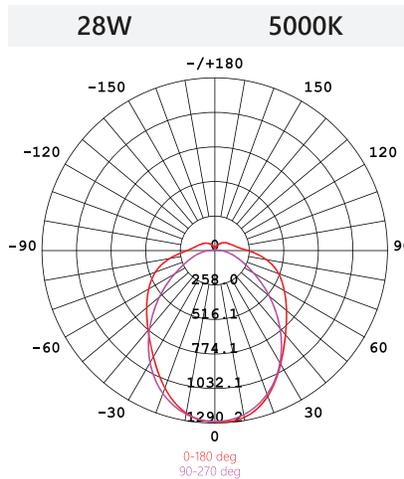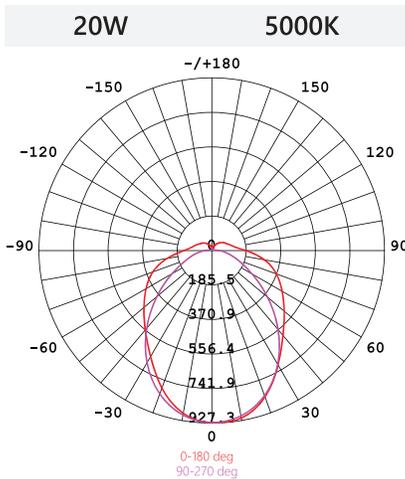

## Dimensions

Fixture	Width (A)	Length (B)	Height (C)
2'	4.3"	24.2"	3.25"
3'	4.3"	36"	3.25"
4'	4.3"	48.35"	3.25"

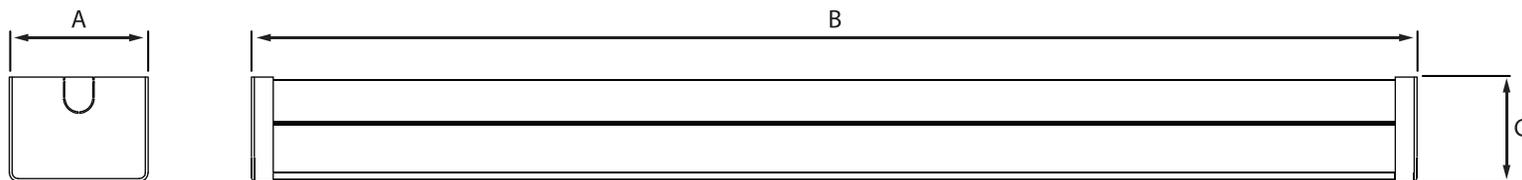

## Included Hardware

Wall Anchor x2



Anchor Screw x2



32mm Machine Screw x2



P3 Wire Nut x5



## Additional Accessories (sold separately)

8W Emergency Backup Driver



Catalog #: SF/EM/LN/8W

5Ft Suspension Kit



Catalog #: SF/WR4/LN/SK