

SYLVANIA Lamps

ECO LED T8 Type B Ballast-Free

Application

SYLVANIA ECO LED T8 lamps deliver a quality LED light, at an affordable price. This long-lasting, economical line provides the perfect lighting solution for any budget for office, industrial or education.

Benefits and Features

- Internal driver/line voltage linear LED T8 with optimized glass optics & G13 medium bi-pin base
- Patented built-in safety circuit prevents current from flowing through the lamp when only one end is engaged in the socket thereby eliminating potential shock hazard
- No risk of electrical arcing between the lamp pins and the lamp holders
- Double ended lamp is wired end-to-end preventing non-passive failure of a fluorescent lamp should it be inadvertently installed in the fixture
- No warm-up time, instant-on with full light output and stable lamp-to-lamp color
- No UV emission
- Approved for use with tube guards
- Maximize energy savings with occupancy sensors
- Up to 120 LPW (Lamp efficacy)
- CCT: 3500K, 4100K, 5000K
- CRI: 80
- Light Emitting Angle 340°; Beam Angle 220°

Electrical

- Installed directly on 120-277V; no ballast required
- Power factor >0.90
- THD <20%
- Non-dimmable
- EMI/RFI: FCC Title 47 CFR, Part 15 Subpart B Class B

Rated Life

- 50,000 hours (L₇₀) for 18W lamps
- 35,000 hours (L₇₀) for 17W lamps

Warranty

- 18W: 5 Year limited lamp warranty (24/7 operation)
- 17W: 3 Year limited lamp warranty (24/7 operation)
- ECO LED T8 Ballast-Free lamps are covered by the LED T8 Lamp Limited Warranty. For additional details, please visit www.ledvanceUS.com/warranty.



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
32W T8 Fluorescent with QHE2x32 ISN	55	36	35%
32W T8 Fluorescent with QHE2x32 ISN	55	34	38%

Ambient Operating Range

- -4°F to 113°F (-20°C to 45°C)

Max Case Temperature

- 158°F (70°C)

Certifications and Listings

- cULus 1993 & 1598C
- RoHS
- Lead Free
- Mercury Free
- FCC*
- NSF**

*FCC Title 47 CFR, Part 15 Subpart B Class B

**NSF/ANSI Standard 2 - Food Equipment

Installation

- Please refer to the Installation manual included inside the packaging and the applications information listed below for more information.



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	


Ordering Guide

ECOLED	1X	T8	L48	FG	8	XX	TYPEB
ECO LED	Wattage 17 = 17 Watts 18 = 18 Watts	Lamp Type T8 = T8	Length L48 = 48"	Material FG = Frosted Glass (non dimmable)	CRI 8 = 80	Color Temperature 35 = 3500K 41 = 4100K 50 = 5000K	UL Type TYPEB = Type B

Ordering Information


Item Number	Ordering Abbreviation	Lamp Length	Base Type	Power (W)	Initial Lumens (lm)	Color Temperature (CCT)	CRI	Beam Angle (°)	Bulb Finish	Package Qty	DLC Listed
41997	ECOLED17T8L48FG835TYPEB	4ft	G13	17	1800	3500K	80	220	Frosted Glass	25	No
41998	ECOLED17T8L48FG841TYPEB	4ft	G13	17	1800	4100K	80	220	Frosted Glass	25	No
41999	ECOLED17T8L48FG850TYPEB	4ft	G13	17	1800	5000K	80	220	Frosted Glass	25	No
40969	ECOLED18T8L48FG835TYPEB	4ft	G13	18	2160	3500K	80	220	Frosted Glass	25	No
40970	ECOLED18T8L48FG841TYPEB	4ft	G13	18	2160	4100K	80	220	Frosted Glass	25	No
40971	ECOLED18T8L48FG850TYPEB	4ft	G13	18	2160	5000K	80	220	Frosted Glass	25	No

Physical Information

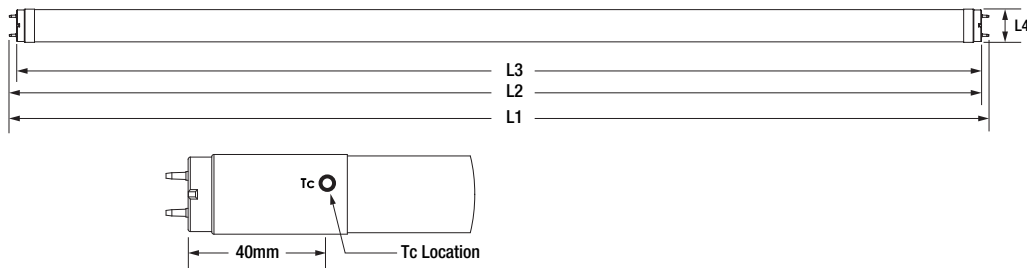

Lamp Description	L1 End of Base Pin to End of Opposite Pin End	L2 Base Face to Opposite Base Pin	L3 Base Face to Base Face	L4 Bulb Outside Diameter
ECO LED/L48	47.725"±0.055" (1212.2mm ±1.4mm)	47.45"±0.05" (1205.25mm±1.25mm)	max 47.22" (1199.4mm)	1.02"±0.08" (25.9mm±2.0mm)

Wiring Diagram

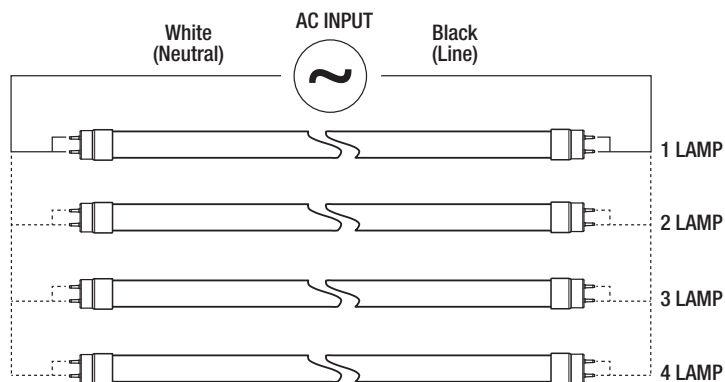

Note:

1. ECO LED Type B lamp is polarity neutral. Can be installed in either direction.
2. Sockets may be shunted or non-shunted. Tie socket leads together for non-shunted sockets.

Application Information

1. Suitable for open and enclosed fixtures.
2. Suitable for use in dry and damp environments; cannot come in direct contact with water.
3. Ensure lamp holders/sockets are in good operating condition before installation.
4. No socket change required. Sockets may be shunted or non-shunted. Tie socket leads together for non-shunted sockets as instructed in installation guide.
5. Not for emergency lighting.
6. Not to be used with dimmers.
7. Do not use ECO LED Type B T8 lamps with external LED drivers or ballasts.
8. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
9. When installing the ECO LED Type B T8 lamps, the UL rating of the existing fixture is not voided (even when it is electrically modified) since our ECO LED Type B T8 lamp is UL Classified (as a luminaire conversion retrofit kit) under UL standard 1598C. UL 1598C is the standard covering LED retrofits intended for an existing UL rated fixture. Since the user is retrofitting with a UL1598C classified LED kit, the installer must follow the installation instructions included with the lamps for the modified fixture to retain its UL rating.
10. All installation, inspection, and maintenance of lighting fixtures should be done with the power to the fixture turned off. Lamps should be installed and operated in compliance with the National Electrical Code (NEC), Underwriters Laboratories Inc. (UL) requirements, and all applicable codes and regulations.
11. Please read all installation instructions before attempting installation.
12. ECO LED Type B is compatible with Philips Bodine ELI-S-20 Emergency Lighting Inverters and IOTA inverter models IIS-25-I, IIS-35-I, IIS-50-1, IIS125, IIS-375, IIS-550.
13. For detailed warranty information, please see www.ledvanceUS.com/warranty.

LEDVANCE LLC
181 Ballardvale Street
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

