



### Description

Venture Lighting's Select-Pro LED Vapor Tight fixtures are color temperature and wattage selectable. These field-adjustable fixtures can change to 3 different CCT settings and 3 different wattage settings. Each fixture is preset to the highest wattage and 5000K CCT. Venture Lighting's Select-Pro LED Vapor Tight fixtures are designed for use under corrugated roof applications, utility lighting, maintenance areas, parking garages, and tunnels.

### Construction

The fixture is a non-corrosive construction with a one-piece polycarbonate housing and lens. The diffuse gasketed lens is secured by non-corrosive stainless-steel clips. This versatile fixture is IP65 rated.

### Electrical

Fixtures are provided with 120-277V 50/60 Hz drivers with 0-10V DC continuous dimming capability to 10%.

### Mounting

Fixtures are supplied with surface mounting clips and V-hooks for chain mounting (chain not included). The lightweight design allows for easy installation/replacement of existing fixtures.

### Warranty

For warranty information refer to: [www.venturelighting.com/resources/warranties](http://www.venturelighting.com/resources/warranties)

DLC Model# VP8SA2-90/75/65-835/40/50

### Product Performance

Wattage	3500K CCT	4000K CCT	5000K CCT
	Lumen Output	Lumen Output	Lumen Output
90W	11970	12870	12150
75W	10425	11175	10575
65W	9230	9880	9360
Color Rendering Index (CRI)			≥80
Lumen Maintenance @50,000 Hrs*			90%
Calculated L70 @25°C Ambient (Hrs)*			163,000
Operating Temperature Range		-40°F to 104°F (-40°C to 40°C)	

### Physical Characteristics

Fixture Color	Gray
Length	94.5" (2400mm)
Width	3.8" (96.8mm)
Height	3.1" (78.8mm)
Weight	7.9 lbs (3.6 kg)

### Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120-277V 0.8A Max
Dimming	0-10V DC continuous to 10%

### Regulatory Qualifications

cULus Listed
DLC® Qualified
IP65 Rating – Suitable for Wet Locations
NEMA Type 4X Enclosure Rating


### Accessories

Add suffix "-EM" to order code for a factory installed Battery Backup
SP12714 – 120-277V Surge Protector
PH58143 – Wet Rated Motion Only Control Sensor – Long Extension
PH52171 – Wet Rated Motion/Photocell/Dimming Control Sensor – Long Extension


Revision: 03, 16-Apr 2024

# Venture LED Vapor Tight

## DIMENSIONS

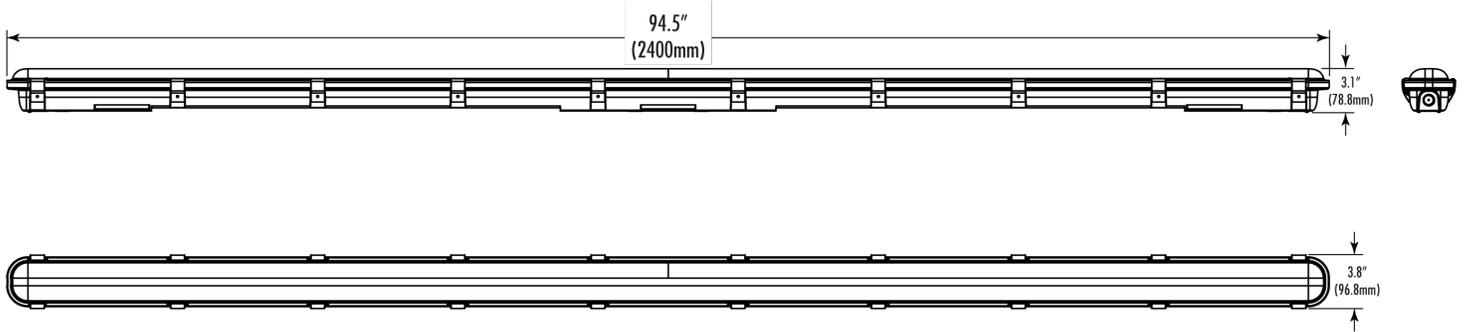

## PHOTOMETRICS

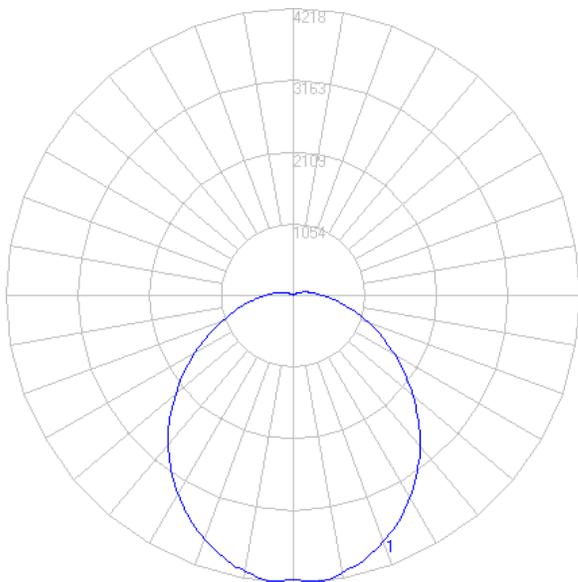

**(800) 451-2606**

6675 Parkland Blvd., Suite 100

Solon, Ohio 44139 USA

Email: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

**VentureLighting.com**

