



# Mark 10 Powerline

## MARK 10 POWERLINE ELE DIMMING BALLAST (2) F32T8 120V

For companies looking to make their fixed-output linear T8, 4-pin CFL, and T5/HO fluorescent systems more cost effective and sustainable, Mark 10 Powerline ballasts provide an easy solution without the need for additional control leads. Simply, (1) replace the ballast, (2) replace the switch, (3) dim the lights, that is all it takes. It's that easy to bring the convenience and flexibility of fluorescent dimming to conference rooms, private offices, auditoriums, architectural cove lighting – anywhere dimming is required.

### Product data

General Information		Input Power (Min)	
Lamp Type	F32T8		15 W
Number of Lamps	2 piece/unit	Rated Lamp Watts	32 W
Ballast Type	Dimmable Fluorescent	<b>Wiring</b>	
Base Model	REZ2S32SC	Color Input Terminals	No terminals
Suitable For Outdoor Use	Yes	Color Output Terminals	No terminals
Automatic Restart	Yes	Wire Striplength	0.50/0.375 mm
		Control Wire Gauge	NA
		Lamp Connection	Series
		Wire Length by Color	See data sheet
		Wire Gauge (Nom)	18AWG mm
		Wire Type	Solid
		Remote Wiring Configuration Allowed	Yes
		Tandem Wiring Configuration Allowed	Yes
		Through Wiring Configuration Allowed	Yes
		Max Ballast-Lamp Distance Remote Wiring	6'
		Max Ballast-Lamp Distance Tandem Wiring	Any = 6'
		Max Ballast-Lamp Distance Through Wiring	Any = 6'
		Connector Type	No connector
Operating and Electrical			
Input Voltage	120 V		
Input Frequency	60 Hz		
Max THD	10 %		
Starting Method	Programmed Start		
Lamp Current Crest Factor (Nom)	1.6		
Ignition Time (Nom)	1.5 s		
Ballast Factor (Max)	1		
Ballast Factor (Min)	0.05		
Power Factor (Nom)	0.99		
Input Current (Operating) (Nom)	0.57 A		
Input Power (Max)	68 W		

## Mark 10 Powerline

### Temperature

T-Case Maximum (Nom)	70 °C
----------------------	-------

### Mechanical and Housing

Housing Material	Metal
Housing	SC
Housing Dimensions	9.5" x 1.7" x 1.18"

### Approval and Application


EMC Immunity Standard	FCC Consumer
Approbation Marks	CSA certificate UL certificate CEC Listing CEE Rated CSA E NEMA Premium NOM certificate RoHS Compliant

Sound Rating	A
UL Recognized	No

### Product Data

Order product name	MARK 10 POWERLINE REZ2S32SC35I
EAN/UPC - Product	781087109892
Order code	REZ2S32SC35I
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913710231601
Net Weight (Piece)	0.432 kg

### Dimensional drawing

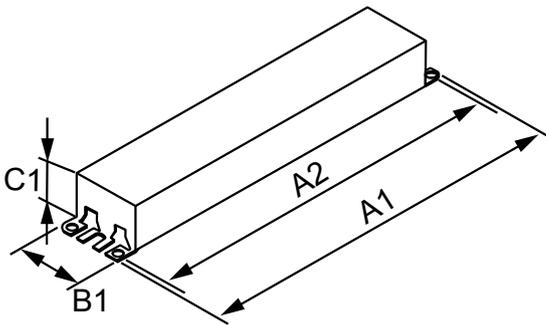

ELE DIMMING BALLAST (2) F32T8 120V

Product	A1	A2	B1	C1
MARK 10 POWERLINE REZ2S32SC35I	9.5 in	8.90 in	1.7 in	1.18 in

