

COB SERIES PRO KIT

24V DC High Output COB - Pro Kit

Designed for lighting professionals, HD Series Pro Kits contain all of the essential installation components needed for basic single color linear lighting systems - just add a controller or dimmer and you're all set. Speed installations by taking out the guess work and questioning compatibility.

- Ready to install 24V DC tape light pro kit
- Includes 96W hardwire power supply and install accessories
- IP20 COB High Output grade
- Available in 2700K, 3000K, and 4000K with 90+ CRI
- Up to 460Lm per foot performance
- Cuttable every 1.96" with 16.4ft max run
- Create custom length power feeds and jumper wires
- Easy installation featuring 3M VBH adhesive backing
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor dry locations
- 50,000 hours rated life




PROJECT:

TYPE:

LOCATION:


CATALOG NUMBER:

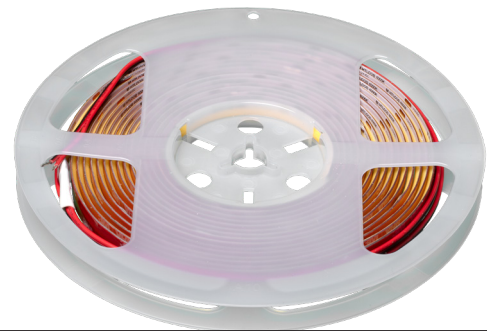

COB SERIES QUICK SPECS

VOLTAGE	24V DC
WATTAGE	5W / ft
LUMENS	up to 460Lm / ft
CCT OPTIONS	2700K / 3000K / 4000K
CRI	90+
MAX RUN	16.4ft
CUTTING POINTS	1.96" (49mm)
IP RATING	IP20 Uncoated
DIMMING	TRIAC / ELV (5-100%)
DIMENSIONS	0.39" (10mm) W x 0.06" (1.65mm) H
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Dry Location
RATED LIFE	50,000 Hours

COB SERIES QUICK LOOK

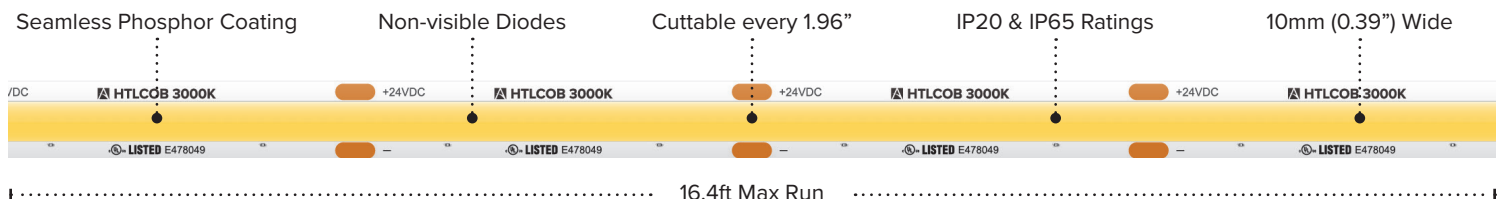


COB PROKIT ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
HTL20-COB-UWW-PROKIT-16	24V DC	2700K	16.4ft	369Lm/ft	5W/ft	IP20	90+	1.94" (49mm)	16.4ft
HTL20-COB-WW-PROKIT-16	24V DC	3000K	16.4ft	409Lm/ft	5W/ft	IP20	90+	1.94" (49mm)	16.4ft
HTL20-COB-WH-PROKIT-16	24V DC	4000K	16.4ft	460Lm/ft	5W/ft	IP20	90+	1.94" (49mm)	16.4ft



COB Pro Kits Include: (1) 24V ADPT 96W Power Supply / (1) 15ft (20/2) Wire Spool / (8) HD Power Feeds / (3) HD Splice Connectors

COB PROKIT QUICK SET-UP

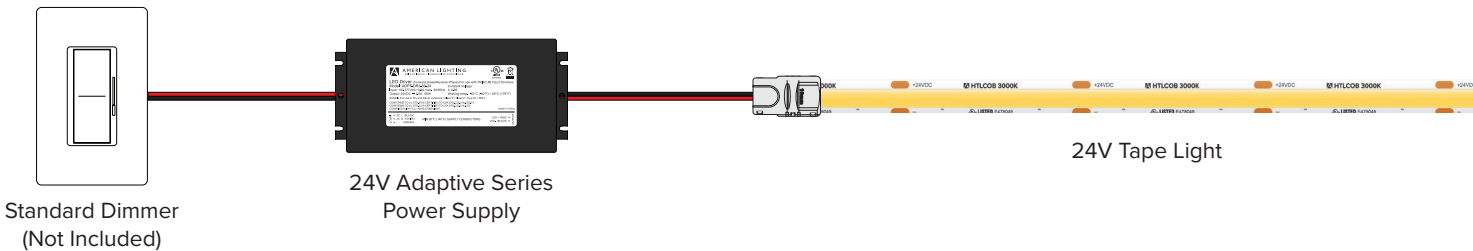

COB PROKIT SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed (IP54)
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector (IP54)
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100ft (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
LVS-2PIN	In-Line Splice Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway (White)

