

HTLHD SERIES PRO KIT

24V DC High Output HD - Pro Kit

Designed for lighting professionals, HD Series Pro Kits contain all of the essential installation components needed for basic single color linear lighting systems - just add a controller or dimmer and you're all set. Speed installations by taking out the guess work and questioning compatibility.

- Ready to install 24V tape light pro kit
- Includes 96W hardwire power supply and install accessories
- High Density (HD) LED spacing in High Output grade
- Available in 3000K warm white with 90+ CRI
- Up to 335Lm per foot performance
- Cuttable every 2.46" with 27ft max run
- Create custom length power feeds and jumper wires
- Easy installation featuring 3M VBH adhesive backing
- IP54 rating featuring nano-coating protective layer
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor dry/damp locations
- 50,000 hours rated life



PROJECT:

TYPE:

LOCATION:


CATALOG NUMBER:



HTLHD SERIES QUICK SPECS

VOLTAGE	24V DC
WATTAGE	3.65W / ft
LUMENS	335Lm / ft
CCT OPTIONS	3000K
CRI	90+
MAX RUN	27ft
CUTTING POINTS	1.51" (38.4mm)
IP RATING	IP54 Unjacketed
DIMMING	TRIAC / ELV (5-100%)
DIMENSIONS	0.39" (10mm) W x 0.06" (1.65mm) H
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Dry / Damp Location
RATED LIFE	50,000 Hours

HTLHD SERIES QUICK LOOK

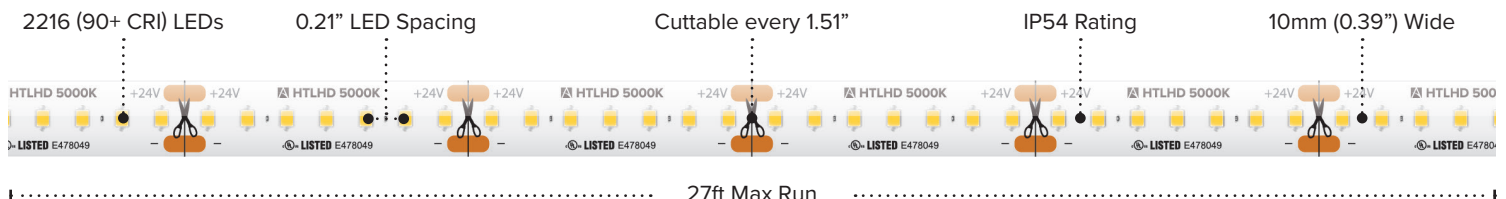


HTLHD PROKIT ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
HTLHD-WW-PROKIT-16	24V DC	3000K	16.4 ft	335Lm / ft	3.65W / ft	IP54	90+	1.51" (38.4mm)	27 ft



HTLHD Pro Kits Include: (1) 24V ADPT 96W Power Supply / (1) 15ft (20/2) Wire Spool / (8) HD Power Feeds / (3) HD Splice Connectors

HTLHD PROKIT QUICK SET-UP

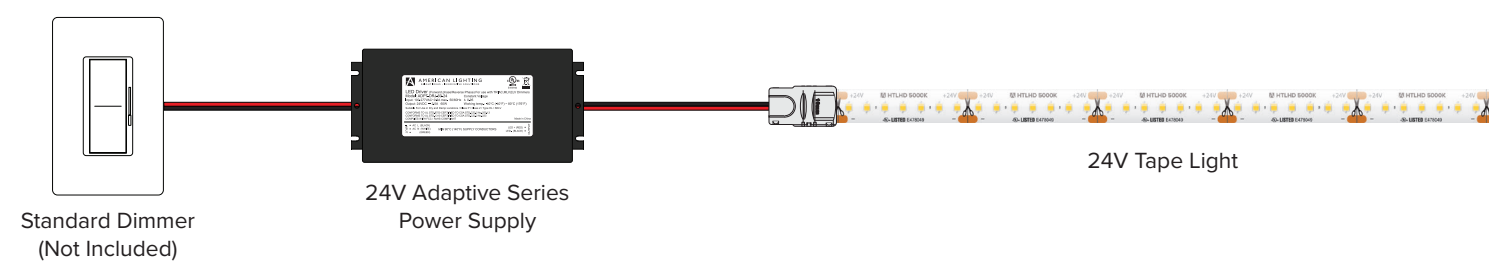

HTLHD PROKIT SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed (IP54)
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector (IP54)
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100ft (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
LVSB-2PIN	In-Line Splice Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway (White)

