

STANDARD FLANGE SLOT

Recessed Mount Channel

For remodeling applications, the standard flange channel is a great fit that can be retrofit into most existing installations. The standard flange channel can be installed simply by cutting into existing drywall or substrate and securing into place with spring loaded clips or construction adhesive. Making for a simple yet impactful line of light for most unique tape light installations.

- Recessed channel extrusion best suited for drywall applications
- Create seamless lines of light into existing substrates
- Frosted lens protects light source while evenly diffusing light
- Anodized aluminum provides excellent heat dissipation
- Field cuttable channel and lens
- Compatible with 10-12mm wide tape light with HD connectors

Available Finishes



Anodized Aluminum

Compatible Tape Light

- Single Color (10mm) + HD Connector
- Tunable CCT (10mm) + HD Connector
- RGB (10mm) + HD Connector
- RGBW (12mm) / RGBTW (12mm) + HD Connector

PROJECT:

TYPE:

LOCATION:

CATALOG NUMBER:




STANDARD FLANGE SLOT ORDERING INFORMATION

ITEM NUMBER	DESCRIPTION
PE-DFSLOT-2M	2M Standard Flange Slot Aluminum Channel
PE-SLOTLENS-2M	2M Frosted Polycarbonate Lens
PE-SLOTLENS-3M	3M Frosted Polycarbonate Lens (Special Order)
PE-SLOTLENS-6M	6M Frosted Polycarbonate Lens (Special Order)
PE-DFSLOT-END	Standard Flange Slot End Cap
PE-DFSLOT-CLIP	Standard Flange Slot Mounting Spring Clip
PE-180-CON	180° End-to-End Connector
PE-90-CON	90° End-to-End Connector

Standard Flange Slot Extrusion is available as special order only
Please allow up to 2 weeks for order processing

DOUBLE FLANGE ACCESSORIES



PE-DFSLOT-CLIP




PE-180-CON



PE-90-CON

STANDARD FLANGE SLOT DIMENSIONS

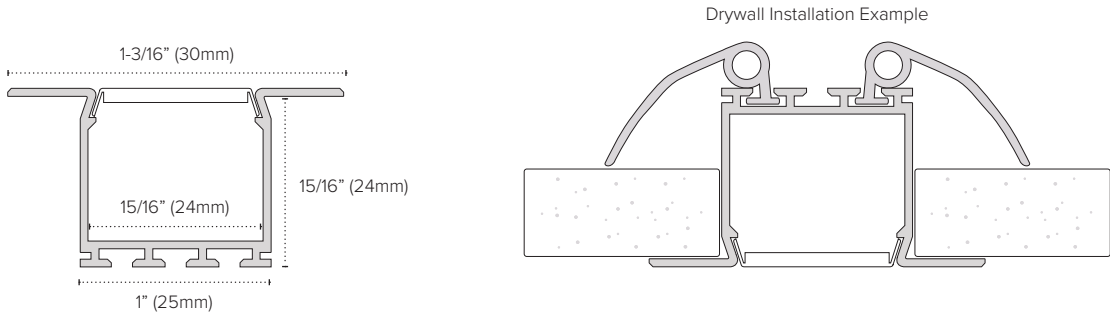

STANDARD FLANGE SLOT PRE-MADE COUPLERS

ITEM NUMBER	DESCRIPTION
PE-DFSLOT-90	90 degree coupler for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-90VE	90 degree coupler (exterior face) for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-90VI	90 degree coupler (interior face) for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-135VI	135 degree coupler (interior face) for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-135VE	135 degree coupler (exterior face) for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-135	135 degree coupler for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-135TR	135 degree "T" coupler (right angle) for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-135TL	135 degree "T" coupler (left angle) for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-135X	135 degree "X" coupler for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-90T	90 degree "T" coupler for Standard Flange Slot extrusion with SLOTLENS
PE-DFSLOT-90X	90 degree "X" coupler for Standard Flange Slot extrusion with SLOTLENS

Couplers available as special order only
Please allow up to 2 weeks for order processing

