

LINEAR RGB WALL WASHER

120V AC DMX + STANDALONE

High power red, blue, and green LEDs combined with a durable aluminum housing rated for wet locations make this linear RGB fixture perfect for high impact illumination, indoors or out. Linear RGB fixtures must be powered directly with the attached 5ft power cord, but allow data linking up to thirty fixtures.

- 120V AC voltage Plug-n-play operation
- Full RGB color mixing produces 16 million colors
- Available in 48" length fixture
- Control via DMX controller or integrated standalone controls
- Link data up to 30 fixtures
- Features Built-in driver and 5ft grounded power cord
- Durable aluminum alloy housing with enamel finish and tempered glass lens
- Integrated mounting brackets with adjustable tilt design for flexibility
- Indoor and outdoor rated (IP65)
- 60,000 hours rated life



PROJECT:

TYPE:

LOCATION:

CATALOG NUMBER:



WW-L48-RGB SERIES QUICK SPECS

SERIES	WW-L48-RGB
VOLTAGE	120V AC
WATTAGE	45W / ft
LUMENS	N/A
CCT OPTIONS	RGB
DIMMING	DMX
BEAM ANGLE	25°
CERTIFICATIONS	cULus Listed - Wet Location
RATED LIFE	60,000 Hours

- Multiple fixtures can be controlled individually (must have access to all units) or synchronously (must have access to the first unit only) using built-in standalone features. To synchronize, all fixtures must be interconnected with their input and output data cables. The first unit will control all interconnected fixtures. The maximum number that can be interconnected with signal cables is thirty fixtures. See instructions for more details.
- An external controller (not included) can control all interconnected fixtures (up to thirty maximum) to have mixing levels at your fingertips and/or to use sound activation. See instructions for more details.

WW-ARRAY-RGB SERIES ACCESSORIES


ITEM NUMBER	DESCRIPTION
WW36-EX15	15ft Interconnectable Power Extension Cable
WW-EC15	15ft DMX Signal Cable
WW-END	Signal Termination End Cap
WW-XLR3*	3ft DMX XLR3 Adapter Cable
WW-XLR3-15*	15ft DMX XLR3 Adapter Cable
CUSTOM CABLE*	DMX or Signal Cable

*These accessories are custom made to order and will incur a Custom Cable Assembly Fee per unit.

WW-L48-RGB SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	WATTAGE / FT	IP RATING	BEAM ANGLE	DIMMING
WW-L48-RGB	120V AC	RGB	45W / ft	IP65	25°	DMX

WW-L48-RGB SERIES QUICK DIMENSIONS

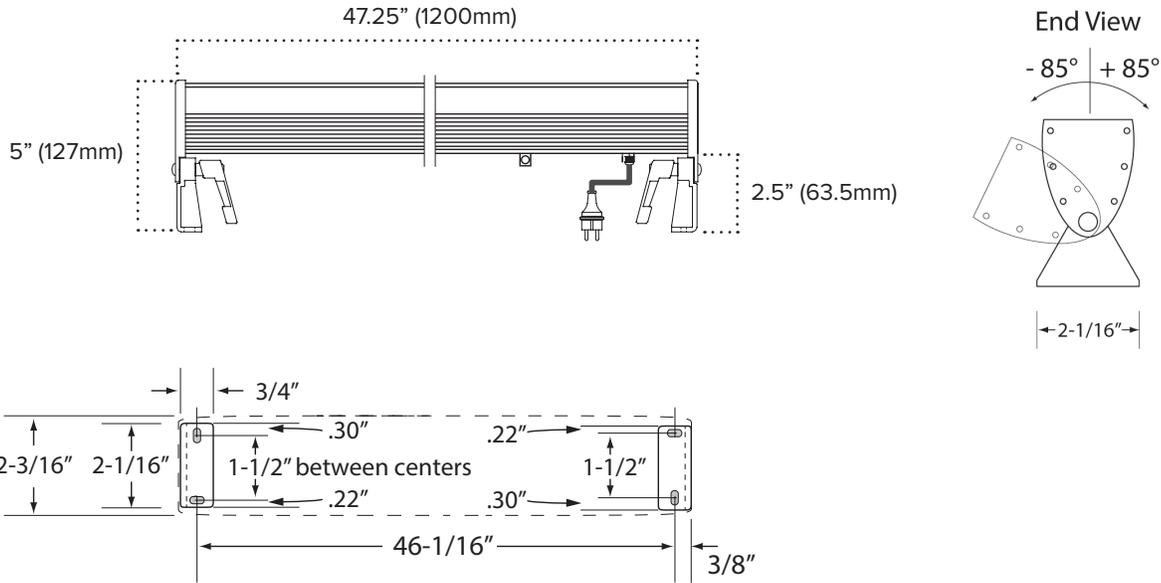

Mounting Hole Locations of Mounting Brackets
Looking toward mounting surface through housing body



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.