



Features

- Excellent color rendering (94+ CRI)
- 3000K color temperature
- 115 lumens per foot performance
- Consumes up to 1.46 watts per foot
- Dimmable with ELV dimmers and Trulux controls
- Cutable every 3.94"
- 16.4 foot max run
- (IP54) unjacketed
- 50,000 hours rated life

Available CCT



3000K

Control Options

- Trulux Single Color Controls
 - Requires Adaptive Driver + Trulux Receiver
- Primary Side Dimming
 - Requires Standard Dimmer + Adaptive Driver
- Single Color In-line Control

Listing / Ratings




TRULUX™ Bendable - 24V

For unique tape light installations that require a bit of flexible layout options, Bendable tape light series offers installation advantages for back-lighting, signs, and curvilinear coves, since it can bend left and right via the preformed notches. Available in 3000K Warm White with excellent color rendering ability (94+ CRI) and 91 lumens per foot.

Technical Information

Series	STBL
Input Voltage	24V
CCT	3000K
CRI	94+
Wattage	Up to 1.46W per ft
Lumens	115Lm per ft
Max Run	16.4 ft
Cutable	Every 3.94 in
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

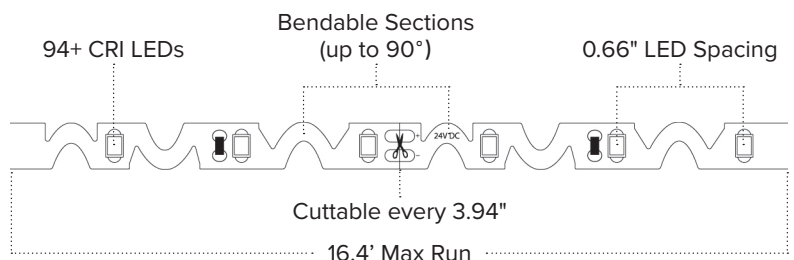

STBL SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STBL-WW	24V	3000K	16.4 ft	115Lm / ft	1.46W / ft	IP54	94+	3.94" (167mm)


STBL (IP54) 16.4ft Reels include: Attached 3ft lead wire

SINGLE COLOR ACCESSORIES

ITEM NUMBER	DESCRIPTION
WIRE-15-2PIN	15ft (20/2) Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
LVSB-2PIN	In-line Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



WIRE-15-2PIN



INLINE-SC-CTRL



SPK-REC-5CH



LVSB-2PIN




RCWY-PVC-1M

Building a Single Color Trulux System?

See pages (52-53) for compatible single color Trulux controllers

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W / 60W / 96W / 192W / 288W)



Trulux Tape Light

Trulux Single Color Control



Single Zone Push Dial
Wireless RF Wall Controller

SRF-BATT



Trulux RF Receiver
(Required for Trulux Controllers)

REC-5A-4Z