

EXTERIOR USL-SFW2H

Solar Flood Light/Wall Pack



PROJECT		TYPE		DATE	
---------	--	------	--	------	--

 Exterior

 Wet Location

 Dimmable

 Battery Option

 Down Light


 5 Year Warranty

OVERVIEW

This solar flood light features a separated solar collector and light emitter, allowing for more flexibility in installation. It is suitable for use as either a flood light or a wall pack in applications such as building exteriors, parks, billboards, covered porches, and residential areas. The 4 meter cord allows for the light fixture to be placed in areas without direct sunlight.

FEATURES

- IP65
- Thermal protection
- Non-integrated solar and light source
- Indicator LEDs for battery status

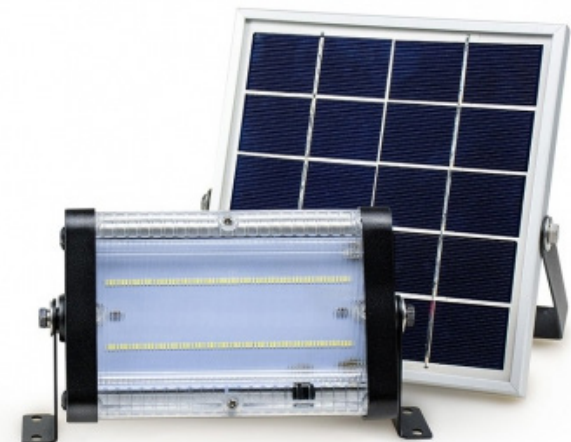

ORDERING INFORMATION

EXAMPLE PN: USL-SFW2H-15W-60K

USL-SFW2H	SIZE / POWER	CCT
	10W 10 WATTS	60K 6000K
	15W 15 WATTS	
	20W 20 WATTS	
	40W 40 WATTS	
	50W 50 WATTS	

EXTERIOR USL-SFW2H

Solar Flood Light/Wall Pack



SPECIFICATIONS

MODEL	OPERATION VOLTAGE	CCT	EFFICACY
USL-SFW2H	3.7V BATTERY	6000K	100 lm/W

MODEL	LED POWER (W)	SOLAR POWER (W)	LI-ION BATTERY	MOUNTING HEIGHT	INSTALLATION DISTANCE	LUMENS (lm) ±10%	EFFICACY (lm/W)
USL-SFW2H-10W	10	2.65	3.7V, 4Ah	7-13 ft	39 ft	1,000	100
USL-SFW2H-15W	15	4.25	3.7V, 6Ah	13-20 ft	49 ft	1,500	100
USL-SFW2H-20W	20	5.2	3.7V, 8Ah	13-20 ft	62 ft	2,000	100
USL-SFW2H-40W	40	9.45	3.7V, 12Ah	13-20 ft	85 ft	4,000	100
USL-SFW2H-50W	50	14.3	3.7V, 18Ah	13-20 ft	98 ft	5,000	100

DIMENSIONS

MODEL	L LENGTH	W WIDTH	D DEPTH	WEIGHT
USL-SFW2H-10W	8 in 203.5 mm	4.1 in 103.5 mm	3.1 in 79.5 mm	2.2 lbs 1 kg
USL-SFW2H-15W				2.4 lbs 1.1 kg
USL-SFW2H-20W				2.6 lbs 1.18 kg
USL-SFW2H-40W	13.7 in 349 mm			4.8 lbs 2.17 kg
USL-SFW2H-50W				6 lbs 2.7 kg