

COMMERCIALPro

PlanoARCH Edge-Lit Panel


Standard Lens | LPNL SERIES

COMMERCIAL GRADE

Product Features



- Easy Installation: Lay-In Ready w/ Siesmic Hooks
- Light-Body Aluminum Alloy Frame w/ Modern Seamless Bezel
- Dimmable, Instant-ON, No Flicker, Thermally-Isolated Driver
- PMMA Acrylic Glass w/ Anti-Aging Zer0Shift® Lensing
- Low-Profile Streamlined Ultrathin Design
- 7-Year, 75,000Hrs Warranty
- High Efficacy: $\geq 130\text{LM/W}$
- UL Damp Location Listed

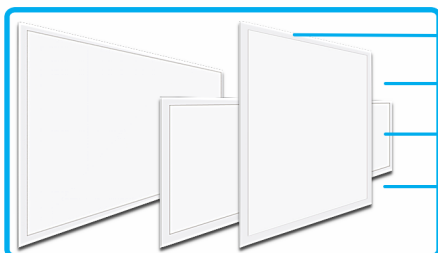

- Dimensions: 1x4, 2x2, 2x4
- Design: Gapless Bezel for No Light Leakage
- Driver Protection: Overload & Short-Circuit
- Wiring Methods: 0-10V, or Far-Field Infrared



APPLICATIONS

- Office/Conference Rooms
- Classrooms/Libraries
- General Outdoor Lighting

ACCESSORIES

- Surface Mount Kit
- Suspension Mount Kit

USAGE ENVIRONMENT

- Ambient: -15 to 150°F
- Operational: -5 to 115°F
- Power Factor: > 0.95
- Beam Angle: 120°
- CRI: > 80

The Plano[®]ARCH edge-lit panel w/ standard lens follows the tradition of light-body aluminum alloy frame and quick access to driver, light engine, and other essential components for easy maintenance.

With an ultra-thin modern design for a gapless, zero light leakage bezel, the LPNL-series is ideal for offices and workspaces, classrooms and general lighting alike.



Office & Conference Rooms



Classrooms & Libraries


Specification & Technical Data (LPNL-Series | Standard Lens Edge-Lit Panel)

MODEL	DIMENSION	WATTS	CCT (xx)	LUMEN	VOLTAGE	CRI	Power Factor	MASTER CARTON	DIMMABLE	Ambient (°F) Operational (°F)
LPNL22-25-xx-A1	2 x 2	25W	3000K 3500K 4100K 5000K	3,250LM	100-277V	≥80	>95	4PCS	0-10V	-15°F - 150°F -5°F - 115°F
LPNL22-40-xx-A1	2 x 2	40W	3000K 3500K 4100K 5000K	5,200LM	100-277V	≥80	>95	4PCS	0-10V	-15°F - 150°F -5°F - 115°F
LPNL14-25-xx-A1	1 x 4	25W	3000K 3500K 4100K 5000K	3,250LM	100-277V	≥80	>95	4PCS	0-10V	-15°F - 150°F -5°F - 115°F
LPNL14-40-xx-A1	1 x 4	40W	3000K 3500K 4100K 5000K	5,200LM	100-277V	≥80	>95	4PCS	0-10V	-15°F - 150°F -5°F - 115°F
LPNL24-40-xx-A1	2 x 4	40W	3000K 3500K 4100K 5000K	5,200LM	100-277V	≥80	>95	2PCS	0-10V	-15°F - 150°F -5°F - 115°F
LPNL24-50-xx-A1	2 x 4	50W	3000K 3500K 4100K 5000K	6,500LM	100-277V	≥80	>95	2PCS	0-10V	-15°F - 150°F -5°F - 115°F
LPNL24-60-xx-A1	2 x 4	60W	3000K 3500K 4100K 5000K	7,800LM	100-277V	≥80	>95	2PCS	0-10V	-15°F - 150°F -5°F - 115°F

Ordering Information: To specify the exact model number, add "-xx", where "xx" is the first two numeral digits of the CCT (i.e., LPNL22-25-41-A1 for 25W & 4100K LPNL-Standard Lens Edge-Lit Panel).

Mechanical Drawing:

MODEL Series	A (in)	B (in)	C (in)	WEIGHT (lb)
LPNL22	23.74"	23.74"	0.39"	8.16
LPNL14	11.85"	47.76"	0.39"	8.38
LPNL24	23.74"	47.76"	0.39"	15.87

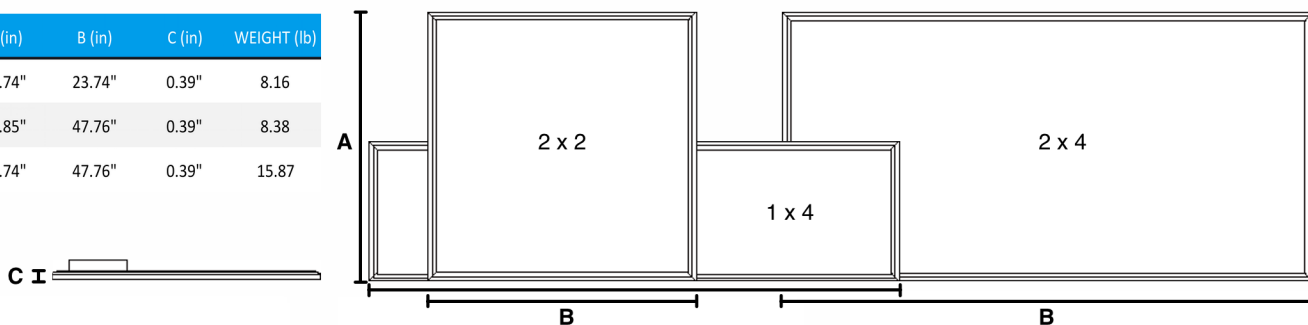

Distribution Diagram:

