




Lineo Linkable 120V LED Strip

DIMENSIONS

A: HEIGHT		1.25"
B: LENGTH	4W	11.8"
	8W	23.6"
	15W	47.3"
C: WIDTH		1"



Applications:

General and task illumination of compact spaces such as counters, workstations, shelving and retail displays.

Features:

Modular system allows for tool free installation by quickly linking bars from end to end. Supplied with convenient integral on/off switch as well as clear polycarbonate lens to protect lamp from dust and damage. Available in Incandescent White (2700K), Warm White (3000K) & Cool White (4000K) color temperatures. For other color temperatures please consult factory.

Optics:

Wide soft distribution without hotspots. L70: 50,000 hrs. 3 Year Warranty.

Housing:

Heavy-duty extruded aluminum housing with integral energy efficient electronic drive.

Mounting:

Universal steel c-clips for surface mounting and end-to-end connector (included) providing continuous channel of shadow-free illumination.

Listing:

ETL listed to UL Standards for dry locations.

Note:

A maximum of 10 fixture links per live feed.

Available Accessories:

DLN31FA1:	White Hardwire J-Box
DLN31FA2-6X:	6" Middle Connector
DLN31FA2-12:	12" Middle Connector
DLN31FA2-36:	36" Middle Connector
DLN31FA3-72:	72" Power Plug Connector

Example: DLN31L-8

Ordering	LAMPING	BALLAST AND VOLTAGE	TEMPERATURE	OPTIONS
DLN31L	-4 11.8" (310 Lm) -8 23.6" (616 Lm) -15 47.3" (1232 Lm)	☒ 120V 50/60 HZ	27K -2,700K, 90 CRI 3K -3,000K, 90 CRI 4K -4,000K, 90 CRI	-D: 120V ELV Dimming


LUMCAT: DL31L-8-4K
 Lamp: LED Linear Bar
 Total Rated Lamp Lumens : 615.38
 Total Luminaire Efficiency : 73.54 %

Luminance			
Angle	Average 0°	Average 45°	Average 90°
45°	11208	9728	9543
55°	10380	8821	8850
65°	9338	7889	8132
75°	7604	6814	7395
85°	4115	5834	6855


Zonal Lumen Summary			
Zone	Lumens	%Lamp	%Fixt
0-20	62.72	N.A.	10.20
0-30	132.92	N.A.	21.60
0-40	217.48	N.A.	35.30
0-60	389.45	N.A.	63.30
0-80	509.53	N.A.	82.80
0-90	540.84	N.A.	87.90
10-90	524.60	N.A.	85.20
20-40	154.76	N.A.	25.10
20-50	243.47	N.A.	39.60
40-70	241.64	N.A.	39.30
60-80	120.08	N.A.	19.50
70-80	50.40	N.A.	8.20
80-90	31.32	N.A.	5.10
90-110	37.80	N.A.	6.10
90-120	51.26	N.A.	8.30
90-130	61.34	N.A.	10.00
90-150	72.18	N.A.	11.70
90-180	74.53	N.A.	12.10
110-180	36.74	N.A.	6.00
0-180	615.38	N.A.	100.00

2013.03.19

LINEO (DLN3) ACCESSORIES

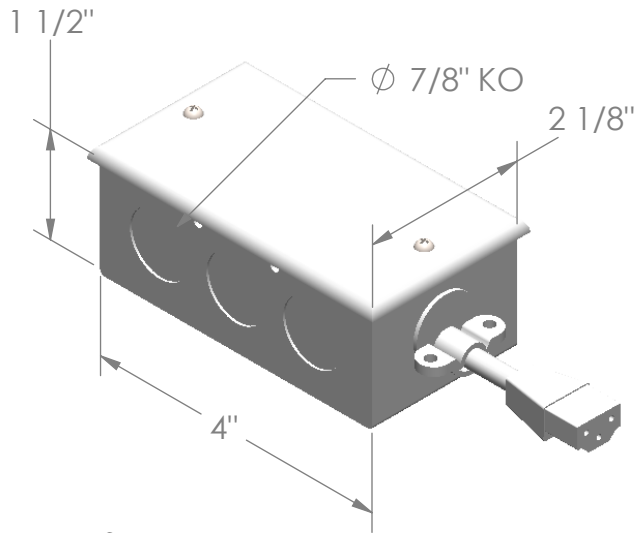


DLN31FA1
WHITE HARDWIRE BOX
DIMENSIONS:
4"L x 2 1/8"W x 1 1/2"H
11 X Ø 7/8" KOs

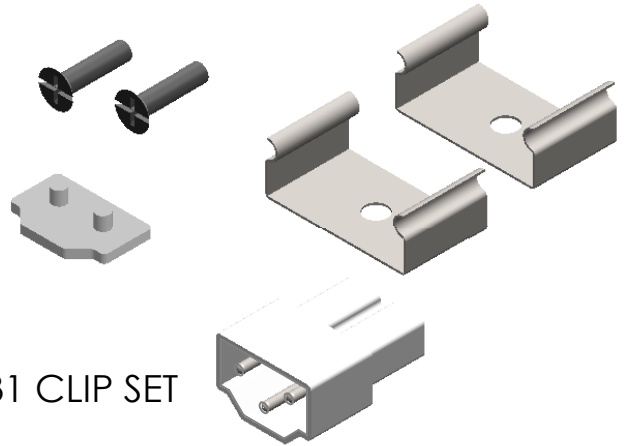


DLN31 CLIP SET

CONTAINS:
2 X METAL CLIPS
1 X END TO END CONNECTOR
1 X CONNECTOR CAP
2 X FLATHEAD SCREW

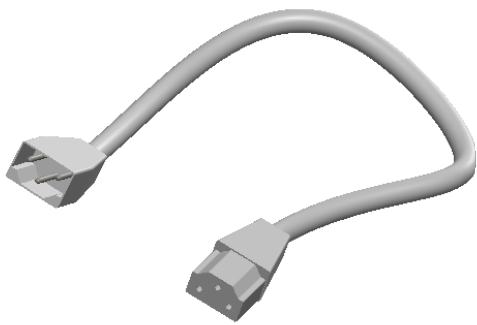

DLN31FA2: (-6, -12, -36)
6", 12", & 36" MIDDLE CONNECTOR

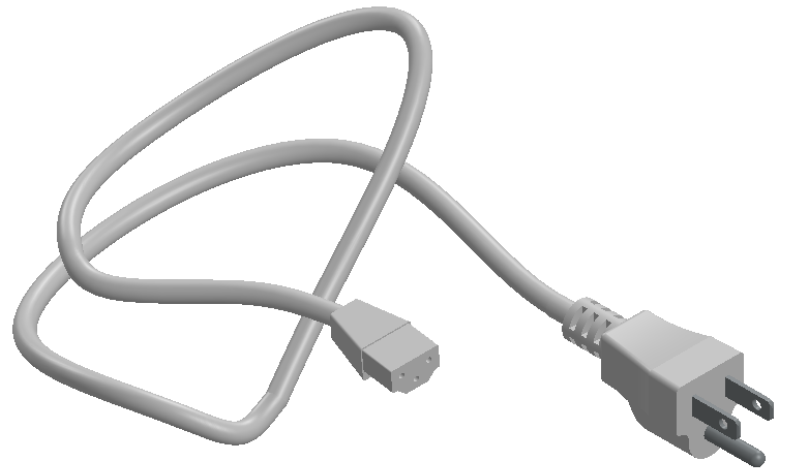

DLN31FA2-72:
72" PLUG IN CONNECTOR
(NOT TO SCALE)