



DRTR Downlight Rotatable Retrofit

FEATURES

- Ideal for accent, display, or wall washing
- Integrated white trim with medium base (E26) socket adapters (included) for direct replacement
- Fits many popular 4" and 6" recessed downlight fixtures
- Lasts up to 30X longer than traditional incandescent
- FieldCCeT feature (select models) allows for multiple "set and forget" CCT options in each fixture
- Instant-on, no warm-up time

CERTIFICATIONS

- UL Listed for dry and damp locations (10W/11W/12W)
- UL Listed for wet locations (13W)
- ENERGY STAR® Approved for superior energy efficiency
- Title 20 certified for FieldCCeT (>90CRI)

PERFORMANCE

- Rated lifetime:
 - L70: >50,000 hours
- 750lm @ 12W; 880lm @ 11W; 800lm @ 10W
- 3000K CCT
- FieldCCeT: 27/30/35/40/5000K CCT
- CRI: >80; >90

ELECTRICAL

- Input voltage: 120V
- Dimming: Triac
- Power Factor: >0.7; >0.9

THERMAL

- 4°F to 104°F (-20°C to 40°C) operating temperature

CONSTRUCTION

- White finish with a frosted lens for diffusing lighting


WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date




10W



11W



12W



13W

APPLICATIONS

- Admin/Class/Conference/Meeting Rooms/Libraries
- Multi-Residential (Dorms/Apts)
- Reception/Lobby
- Dr. Offices/Waiting/Patient Rooms
- Retail/Storefront

CONFIGURATOR

MODEL	SIZE	LUMEN PACKAGE	CRI	CCT	VOLTAGE	DIMMING
DRTR : Downlight Rotatable Retrofit	4 - 4"	12W - 12W; 750 lm	8 - 80 CRI	30 - 3000K	120 - 120V	DT - Triac
		10W - 10W; 800 lm	9 - 90 CRI	CCT5 - 27/30/35/40/5000K		
	6 - 6"	11W - 11W; 880 lm				
		13W - 13W; 900 lm	8 - 80 CRI	30 - 3000K		




PERFORMANCE SUMMARY

ORDER CODE	ITEM #	SIZE	WATTS	NOMINAL LUMENS	LPW	CCT	DIMMING	VOLTS	T20/JA8	ENERGY STAR
12128	DRTR4/12W/830/120DT	4"	12W	750	63	3000K	Triac	120V		★
12129	DRTR6/13W/830/120DT	6"	13W	900	70	3000K	Triac	120		★


FIELD CCT

12130	DRTR4/10W/9CCT5/120DT	4"	10W	800	80	27/30/35/40/5000K	Triac	120V	✓	★
12131	DRTR6/11W/9CCT5/120DT	6"	11W	880	80	27/30/35/40/5000K	Triac	120V	✓	★


PRODUCT DIMENSIONS

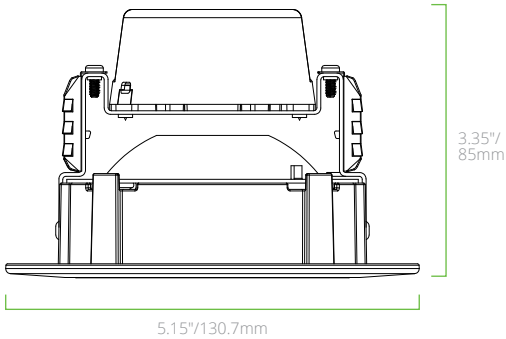


DRTR4/12W/830/120DT

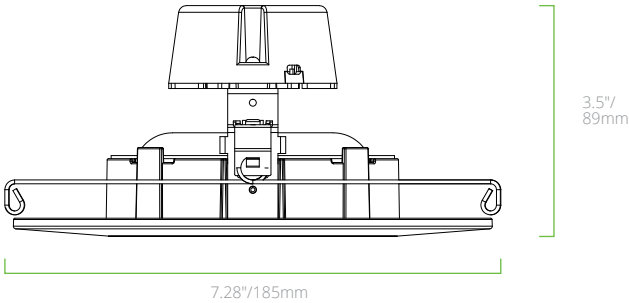

DRTR6/13W/830/120DT

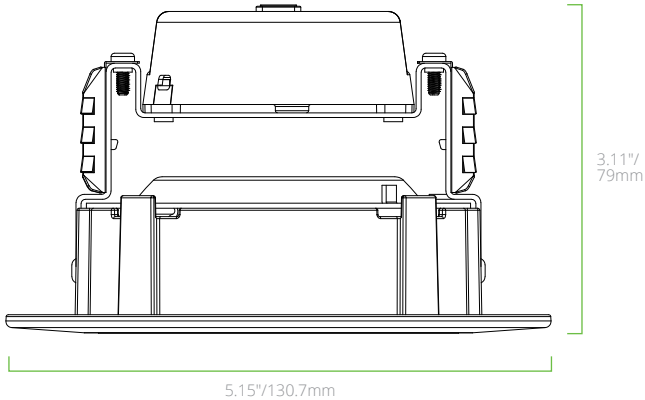

DRTR4/10W/9CCT5/120DT

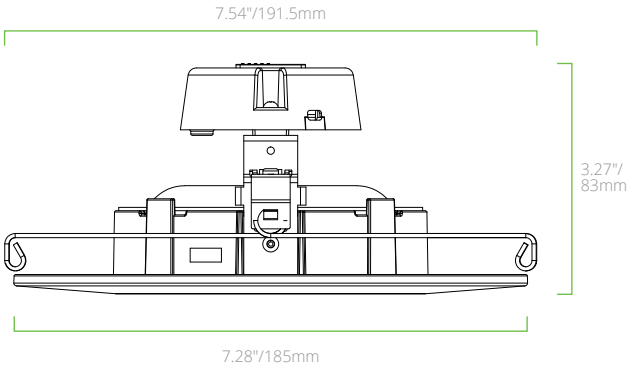


DRTR6/11W/9CCT5/120DT

PHOTOMETRICS


DRTR4/12W/830/120DT

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	168.06	17.70
0-30	348.23	36.80
0-40	543.27	57.40
0-60	829.54	87.60
0-80	927.61	97.90
0-90	933.83	98.60
70-80	30.05	3.20
80-90	6.21	0.70
0-180	947.16	100.00




DRTR4/10W/9CCT5/120DT

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	136.51	16.90
0-30	281.85	34.90
0-40	443.43	54.90
0-60	700.39	86.60
0-80	792.88	98.10
0-90	796.87	98.60
70-80	25.87	3.20
80-90	3.99	0.50
0-180	808.36	100.00




DRTR6/13W/830/120DT

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	140.47	15.10
0-30	291.43	31.40
0-40	462.02	49.80
0-60	759.54	81.80
0-80	904.14	97.40
0-90	915.45	98.60
70-80	50.11	5.40
80-90	11.31	1.20
0-180	928.20	100.00



DRTR6/11W/9CCT5/120DT

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	160.49	15.40
0-30	331.10	31.70
0-40	522.23	50.10
0-60	852.67	81.70
0-80	1014.75	97.30
0-90	1028.87	98.60
70-80	57.02	5.50
80-90	14.12	1.40
0-180	1043.28	100.00



■ Horizontal
■ Vertical