

LED Dual Mode PL Replacement Lamps



5/7/12
watts

475-
1,100
lumens

92+
lpw

G23/
GX23/
G24Q
base

Features

- Operates on existing ballasts or line voltage
- Lasts 5x longer than compact fluorescent lamps
- Consumes up to 1/3 the energy of conventional CFL
- Base rotates for precision orientation once installed in fixture
- Environmentally friendly: contains no glass, mercury or lead
- Shatter-resistant for reduced risk of injury and breakage
- Instant-on with no warmup, unlike CFLs
- 5 year limited warranty

RoHS
Compliant

cUL[®] US

CLASSIFIED
cUL[®] US

Performance

- 5W G23 replaces 13W CFL
- 7W GX23 replaces 18W CFL
- 12W GX23 replaces 26W CFL
- 12W G24Q replaces 26W CFL
- 475/500 lumens @ 5W
- 700 lumens @ 7W
- 1,100 lumens @ 12W
- 50,000 hour life @ L70
- 80+ CRI
- UL/cUL classified for damp locations
- Suitable for use in 6" cans
- Non-dimmable
- 12W items not for use in totally enclosed luminaires
- Bypass mode voltage 120-277V

Applications


- Commercial/Residential
- Hotel/Hospitality
- Education
- Healthcare
- Retail
- Property Management



selection. solutions. simplicity. eiko.com

LED Dual Mode PL Replacement Lamps

Dimensions

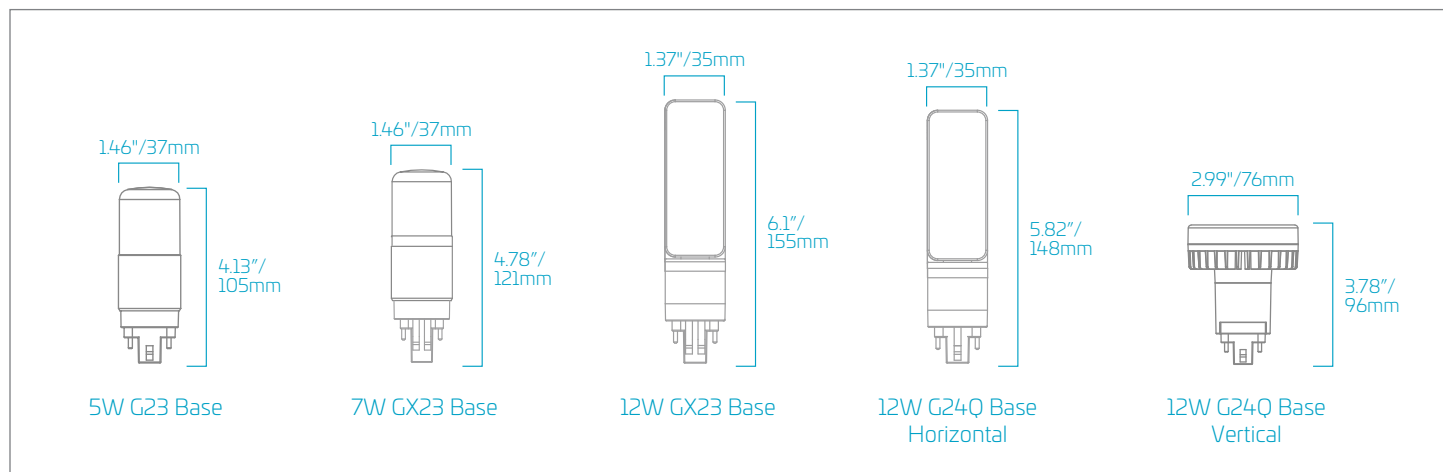

Ordering Information

Order Code	Item #	W	Lm	CCT	CRI	MOL	Orientation	Base	Life/Hrs	Replaces Fluorescent
10172	LED5W2P/G23/827DM-G7B	5W	475	2700K	80+	4.13"	Vertical	G23	50,000	13W CFL
10173	LED5W2P/G23/830DM-G7B	5W	475	3000K	80+	4.13"	Vertical	G23	50,000	13W CFL
10174	LED5W2P/G23/835DM-G7B	5W	475	3500K	80+	4.13"	Vertical	G23	50,000	13W CFL
10180	LED5W2P/G23/840DM-G7B	5W	475	4000K	80+	4.13"	Vertical	G23	50,000	13W CFL
09782	LED5W2PH/G23/835DM-G7B	5W	500	3500K	80+	4.13"	Horizontal	G23	50,000	13W CFL
09626	LED7W2PH/G23/835DM-G7	7W	700	3500K	80+	5.82"	Horizontal	G23	50,000	18W CFL
10176	LED7W2P/GX23/827DM-G7B	7W	700	2700K	80+	4.78"	Vertical	GX23	50,000	18W CFL
10177	LED7W2P/GX23/830DM-G7B	7W	700	3000K	80+	4.78"	Vertical	GX23	50,000	18W CFL
09904	LED7W2P/GX23/835DM-G7B	7W	700	3500K	80+	4.78"	Vertical	GX23	50,000	18W CFL
10178	LED7W2P/GX23/840DM-G7B	7W	700	4000K	80+	4.78"	Vertical	GX23	50,000	18W CFL
09627	LED7W2PH/GX23/835DM-G7	7W	700	3500K	80+	6.1"	Horizontal	GX23	50,000	18W CFL
10163	LED12W2PH/GX23/827DM-G7*	12W	1,100	2700K	80+	6.1"	Horizontal	GX23	50,000	26W CFL
10164	LED12W2PH/GX23/830DM-G7*	12W	1,100	3000K	80+	6.1"	Horizontal	GX23	50,000	26W CFL
09629	LED12W2PH/GX23/835DM-G7*	12W	1,100	3500K	80+	6.1"	Horizontal	GX23	50,000	26W CFL
10179	LED12W2PH/GX23/840DM-G7*	12W	1,100	4000K	80+	6.1"	Horizontal	GX23	50,000	26W CFL
10166	LED12W4PH/G24Q/827DM-G7*	12W	1,100	2700K	80+	5.82"	Horizontal	G24Q/GX24Q	50,000	26W CFL
10167	LED12W4PH/G24Q/830DM-G7*	12W	1,100	3000K	80+	5.82"	Horizontal	G24Q/GX24Q	50,000	26W CFL
09630	LED12W4PH/G24Q/835DM-G7*	12W	1,100	3500K	80+	5.82"	Horizontal	G24Q/GX24Q	50,000	26W CFL
10168	LED12W4PH/G24Q/840DM-G7*	12W	1,100	4000K	80+	5.82"	Horizontal	G24Q/GX24Q	50,000	26W CFL
10169	LED12W4PV/G24Q/827DM-G7*	12W	1,100	2700K	80+	3.78"	Vertical	G24Q/GX24Q	50,000	26W CFL
10170	LED12W4PV/G24Q/830DM-G7*	12W	1,100	3000K	80+	3.78"	Vertical	G24Q/GX24Q	50,000	26W CFL
09631	LED12W4PV/G24Q/835DM-G7*	12W	1,100	3500K	80+	3.78"	Vertical	G24Q/GX24Q	50,000	26W CFL
10171	LED12W4PV/G24Q/840DM-G7*	12W	1,100	4000K	80+	3.78"	Vertical	G24Q/GX24Q	50,000	26W CFL

NOTE: Use order code when ordering. Visit eiko.com to view complete ballast compatibility information.

Not for use with emergency ballasts.

* Not for use in totally enclosed luminaires (12W only).

watch > like > follow



23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975
 Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335