




## INSTALLATION INSTRUCTIONS LED FLOOD LIGHT



FLX/XXW/7CCT/UD/Y/PC  
FLX/PSXXX/7FCCT/US/Y/PC  
FLX/XXXW/750/UD/Y/PC  
FLX/X-XACC

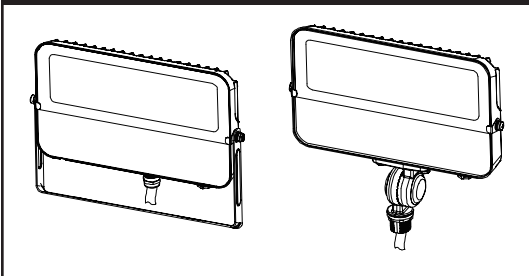
### SAFETY PRECAUTIONS:

**CAUTIONS:** READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FIXTURE  
Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes.  
Proper grounding is required for safety.

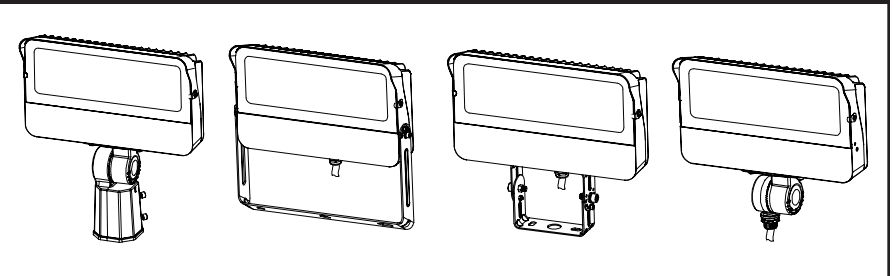
THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY  
A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS  
INVOLVED.

**WARNING:** Make certain power is OFF before installing or maintaining fixture.

#### 15W/30W/50W



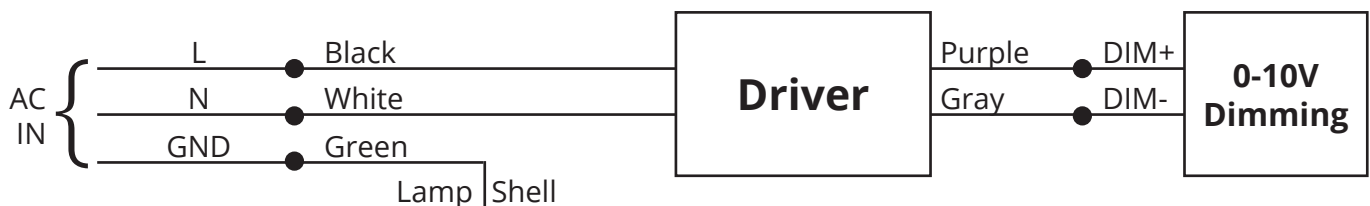
#### 80W/100W/120W/150W



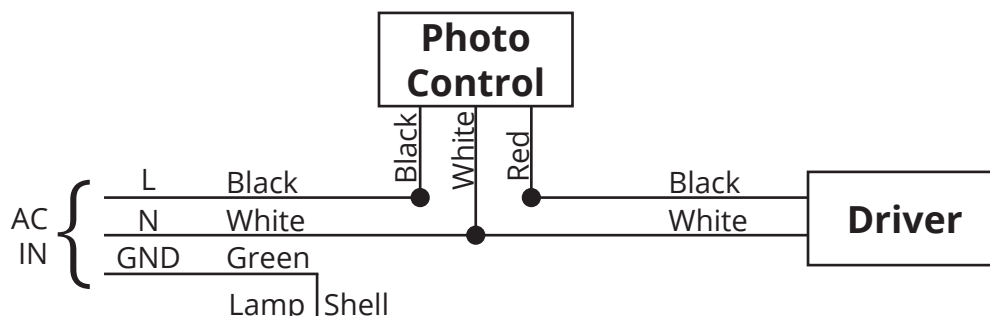
### WIRING CONNECTION:

Turn off the power, connect AC wire, black wire to L, white wire to N, and green wire to E.  
0-10V dimmer connection (with dimmable driver)

1. Compatible with 0-10V dimming.
2. Connect wires as below, purple wire is D+, gray wire is D-.



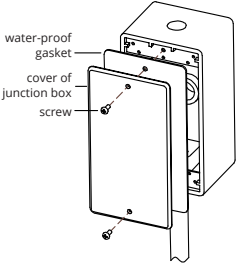
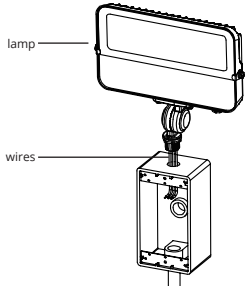
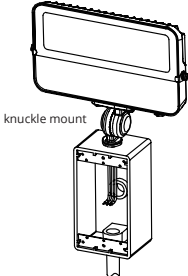
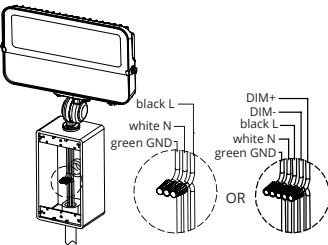
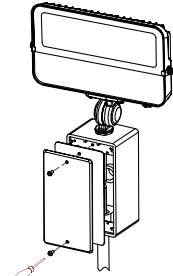
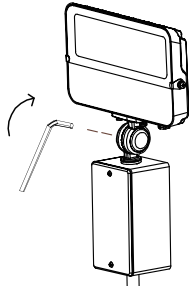
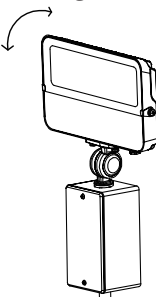
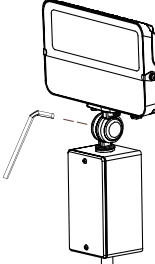
**Photo control Wiring Connection** (only for 80W - 150W)



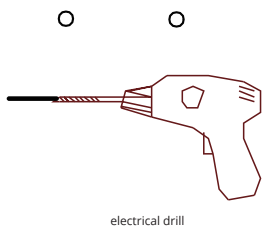
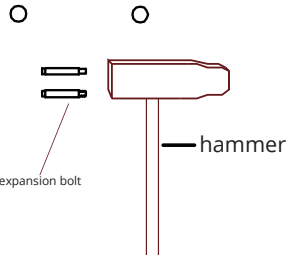
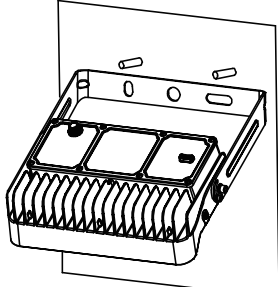
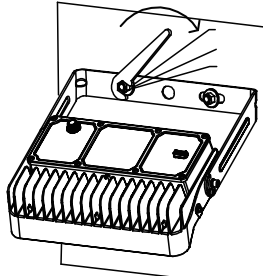
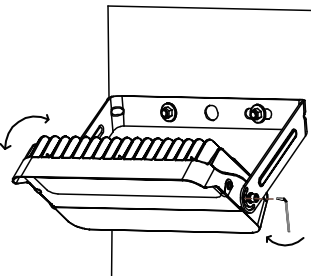
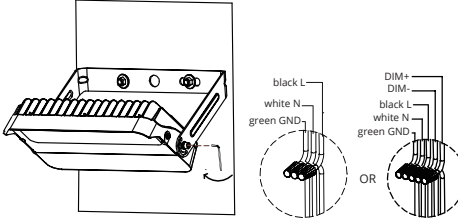
**THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.**

# INSTALLATION:

## Installation Instruction (Knuckle)

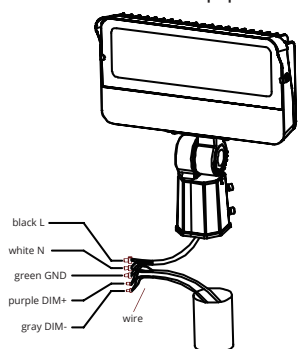
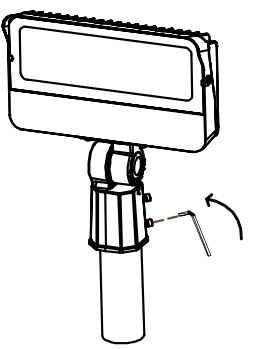
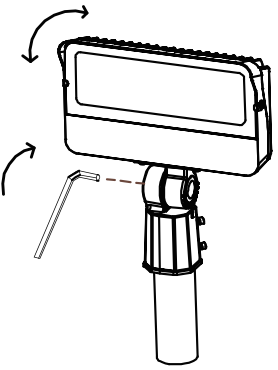
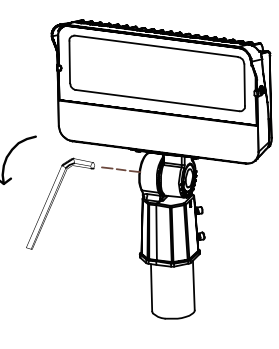
<p>1. Use screw key to open the junction box</p> 	<p>2. Put the wires of lamp into the junction box</p> 	<p>3. Screw the knuckle mount into the junction box</p> 	<p>4. Use wire-nuts to connect the wires of the lamp and the junction box</p> 
<p>5. Lock the junction box with the screw key</p> 	<p>6. Use hex key to screw the screw in knuckle mount</p> 	<p>7. Adjust the lamp into suitable angle</p> 	<p>8. Use hex key to screw the hex screw. Installation complete</p> 

## Installation Instruction (Yoke)

<p>1. Mark the position of the fixing holes with flood light bracket, then drill the fixing holds</p> 	<p>2. Drive in the bolts to the pre-drilled holes with thread outside, as indicated below</p> 	<p>3. Make the bracket face tightly to the wall through the thread.</p> 
<p>4. Fasten the screw nut clockwise with provided hardware by wrench.</p> 	<p>5. Rotate the light to the proper angle and fasten the screws.</p> 	<p>6. Fasten the screws to both sides with the allen wrench.</p> 

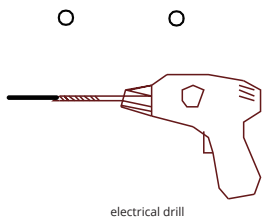
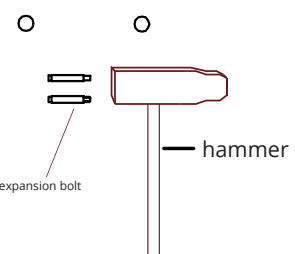
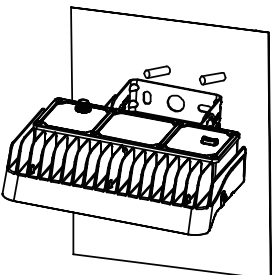
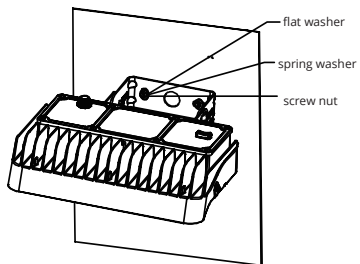
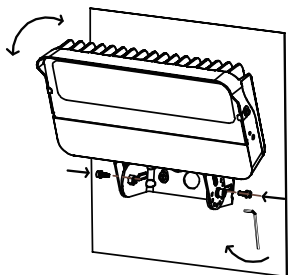
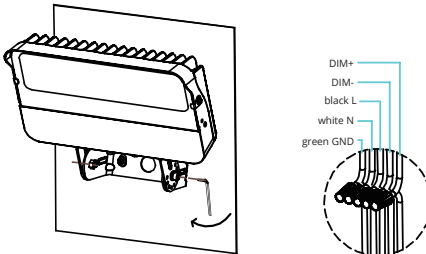
# INSTALLATION:

## 80W - 150W Installation Instruction (Slipfitter)

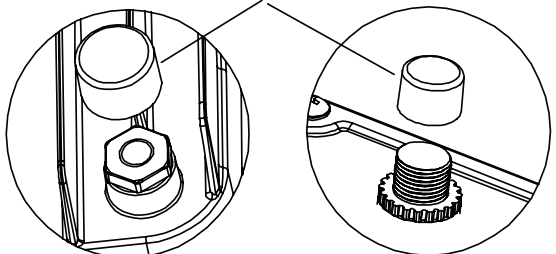
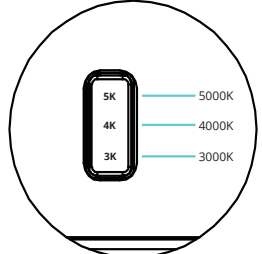
<p>1. Loosen the 4 screws on the lamp holder, connect the wires correctly and put the wires into the lamp pole.</p> 	<p>2. Lock the screws well to fix the lamp on the lamp pole.</p> 	<p>3. Adjust the lamp into a suitable angle.</p> 	<p>4. Use the hex key to screw the hex crew. Installation complete.</p> 
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------

Notice: Locking bolt can be only compatible with a lamp pole that the outer diameter is Ø60, and lamp adjustable angle is 0-90°

## 80W - 150W Installation Instructions (Trunnion)

<p>1. Mark the position of the fixing holes with flood light bracket, then drill the fixing holds</p> 	<p>2. Drive in the bolts to the pre-drilled holes with thread outside, as indicated below</p> 	<p>3. Make the bracket face tightly to the wall through the thread.</p> 
<p>4. Fasten the screw nut clockwise with provided hardware by wrench.</p> 	<p>5. Rotate the light to the proper angle and fasten the screws.</p> 	<p>6. Fasten the screws to both sides with the allen wrench.</p> 

## Control

<p>If the fixture with the photocell is covered with a cap. Please remove the cap, otherwise the photocell does not work.</p> 	<p>Slide to your desired CCT</p> 
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------

Double check the wiring, make sure everything is correct. Then switch the power on and turn on the light.